

Operating Instructions Basic Features



- 1 Getting Started
- 2 Faxing
- 3 Registering
- 4 Troubleshooting

Introduction

This manual contains detailed instructions on the operation and maintenance of this machine. To get maximum versatility from this machine all operators should carefully read and follow the instructions in this manual. Please keep this manual in a handy place near the machine.

Please read the Safety Information in the Basic Features manual before using this machine. It contains important information related to USER SAFETY and PREVENTING EQUIPMENT PROBLEMS.

Notes:

Some illustrations in this manual might be slightly different from the machine.

Certain options might not be available in some countries. For details, please contact your local dealer.

Caution: Use of controls or adjustment or performance of procedures other than those specified in this manual might result in hazardous radiation exposure. This product (see specification in the Operating Instructions) considered a class 1 laser device. Safety precautions and interlock mechanisms have been designed to prevent any possible laser beam exposure to the operator. The following marking is attached on the back of the product.



Two kinds of size notation are employed in this manual. With this machine refer to the metric version.

For good copy quality, the supplier recommends that you use genuine toner from the supplier.

The supplier shall not be responsible for any damage or expense that might result from the use of parts other than genuine parts from the supplier with your office products.

Important

Contents of this manual are subject to change without prior notice. In no event will the company be liable for direct, indirect, special, incidental, or consequential damages as a result of handling or operating the machine.

Power Source:

220-240V, 50/60Hz

Please be sure to connect the power cord to a power source as above. For details about power source, see Chapter 10, "Connecting the Power and Switching On" in the Advanced Features manual.

Trademarks

Adobe® and Acrobat® are registered trademarks of Adobe Systems Incorporated.

Microsoft®, Windows®, Windows NT® are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Macintosh is a registered trademark of Apple Computer, Incorporated.

For information about the latest available drivers, see the relevant manufacturer's Web site.

Read this manual carefully before you use this product and keep it handy for future reference.

TABLE OF CONTENTS

NOTICE	1
Safety Information	1
Safety During Operation	
Positions of the ACAUTION Label	
User Information on Electrical & Electronic Equipment	7
Users in the EU, Switzerland and Norway	
All Other Users	
ENERGY STAR Program	
Energy Saving Modes	
How to Read this Manual	11
Manuals for This Machine	
Basic Features (this manual)	
Advanced Features (on CD-ROM)	12
1 Calling Claude d	
1. Getting Started	
Guide to Components	15
Front View	
Side View	16
Control Panel	17
Starting the Machine	
Turning On the Power	
Turning Off the Power	
Reading the Display	20
Reading the Display and Using Keys	20
Standby Display	21
Communication Display	
Display Prompts	21
0. Faving	
2. Faxing	
Transmission Modes	23
Switching between Memory Transmission and Immediate Transmission	24
Setting Originals	
Loading Originals in the Document Feeder	
Original Sizes Difficult to Detect	
Memory Transmission	27
Canceling a Memory Transmission	29
Before the Start Key is Pressed	
While the Original is Being Scanned	
During Transmission	29
While the Original is Awaiting Transmission	
Immediate Transmission	
Canceling an Immediate Transmission	
Before the Start key is Pressed	
After the Start key is Pressed	33

Scan Settings	34
Resolution	34
Original Type	35
Dialing	36
Entering Numbers Directly	
Pause	
Tone	37
Using Quick Dials	37
Using Speed Dials	38
Using Groups	39
When Specifying a Group with a Quick Dial	40
When Specifying a Group with the Group key	40
Reception Modes	41
Selecting the Reception Mode	
3. Registering	
Own Name/Fax Header/Own Fax Number	43
Registering	43
Editing	
Deleting	46
Quick Dial	47
Registering	
Editing	49
Deleting	
Quick Dial Key Label (Dial label)	51
Label paper	52
Speed Dial	53
Registering	53
Editing	
Deleting	56
Groups	58
Registering	58
Editing	
Editing a Group Name	61
Adding a Fax Number to a Group	
Deleting	64
To delete a destination from a group	
To delete an entire group	
Entering Characters	68
Available Characters	
Keys	
How to Enter Characters	69
4. Troubleshooting	
Loading Paper in the Main Paper Tray	71
Adjusting Volume	
Clearing Original Jams	
Clearing a Copy, Fax, or Print Jam	
Inside the Machine	
Frror Messages	76

When the Receive File Indicator is Lit	78
Solving Problems	79
INDEX	81

NOTICE

↑ CAUTION:

Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Shielded interconnect cables must be employed with this equipment to ensure compliance with the pertinent RF emission limits governing this device.

Direct (or indirect reflected) eye contact with the laser beam may cause serious eye damage. Safety precautions and interlock mechanisms have been designed to prevent any possible laser beam exposure to the operator.

Safety Information

When using this machine, the following safety precautions should always be followed.

Safety During Operation

In this manual, the following important symbols are used:

⚠ WARNING:

Indicates a potentially hazardous situation which, if instructions are not followed, could result in death or serious injury.

⚠ CAUTION:

Indicates a potentially hazardous situation which, if instructions are not followed, may result in minor or moderate injury or damage to property.

↑ WARNING:

- Connect the power cord directly into a wall outlet and never use an extension cord.
- Disconnect the power plug (by pulling the plug, not the cable) if the power cable or plug becomes frayed or otherwise damaged.
- To avoid hazardous electric shock or laser radiation exposure, do not remove any covers or screws other than those specified in this manual.
- Turn off the power and disconnect the power plug (by pulling the plug, not the cable) if any of the following occurs:
 - · You spill something into the machine.
 - You suspect that your machine needs service or repair.
 - The external housing of your machine has been damaged.
- Do not incinerate spilled toner or used toner. Toner dust might ignite when exposed to an open flame.
- Disposal can take place at our authorized dealer.
- Dispose of the used toner cartridge in accordance with the local regulations.
- Keep the machine away from flammable liquids, gases, and aerosols. A fire or an electric shock might occur.
- Connect the machine only to the power source described on the inside front cover of this manual. Connect the power cord directly into a wall outlet and do not use an extension cord.
- Do not damage, break or make any modifications to the power cord.
 Do not place heavy objects on it. Do not pull it hard nor bend it more than necessary. These actions could cause an electric shock or fire.
- If the power cord is damaged (exposure of the core, disconnection,etc.), contact your service representative to change a new one.
 Operating the machine with a damaged power cord may cause an electric shock or fire.

↑ CAUTION:

- Protect the machine from dampness or wet weather, such as rain and snow.
- Unplug the power cord from the wall outlet before you move the machine.
 While moving the machine, you should take care that the power cord will not be damaged under the machine.
- When you disconnect the power plug from the wall outlet, always pull the plug (not the cable).
- Do not allow paper clips, staples, or other small metallic objects to fall inside the machine.
- Keep toner (used or unused) and toner cartridge out of reach of children.
- For environmental reasons, do not dispose of the machine or expended supply waste at household waste collection points. Disposal can take place at an authorized dealer.
- The inside of the machine could be very hot. Do not touch the parts with a label indicating "hot surface". Otherwise an injury might occur.
- Our products are engineered to meet high standards of quality and functionality, and we recommend that you use only the expendable supplies available at an authorized dealer.


- Before moving the machine, be sure to disconnect all external connections, especially the power cord from the wall outlet. Damaged power cords are a fire and electric shock hazard.
- To disconnect the power cord, pull it out by plug. Do not drag the cord itself. Doing so may result in damage to the cord, leading to fire or electric shock.
- For safety reason, unplug the power cord from the wall outlet if the machine will not be used for an extended period of time such as holidays.
- The fusing section of this machine might be very hot. Caution should be taken when removing misfed paper.
- Keep the machine away from humidity and dust. Otherwise a fire or an electric shock might occur. Do not place the machine on an unstable or tilted surface. If it topples over, an injury might occur.
- Do not use aluminum foil, carbon paper, or similar conductive paper to avoid a fire or a machine failure.
- Make sure the room where you are using the machine is well ventilated and spacious. Good ventilation is especially important when the machine is used heavily.
- Do not open toner cartridges forcefully. Toner can spill, dirtying your clothes or hands, and possibly resulting in accidental ingestion.
- If toner or used toner is inhaled, gargle with plenty of water and move into a fresh air environment. Consult a doctor if necessary.
- If toner or used toner gets into your eyes, flush thoroughly with eyswash or water. Consult a doctor if necessary.
- If toner or used toner is swallowed, dilute by drinking a large amount of water. Consult a doctor if necessary.
- Avoid getting toner on your clothes or skin when removing a paper jam or replacing toner. If your skin comes into contact with toner, wash the affected area throughly with soap and water.
- If toner gets on your clothing, wash with cold water. Hot water will set the toner into the fabric and may make removing the stain impossible.

- During operation, rollers for transporting the paper and originals revolve.
 A safety device is being installed so that the machine can be operated safely. But take care not to touch the rollers during operation. An injury might occur.
- Fire and breakdown can result from heavy accumulation of dust inside this machine. Consult your service representative for details about and charges for cleaning the machine's interior.
- If you have to move the machine when the optional paper tray unit is attached, do not push on the main unit's top section. Doing so can cause the optional paper tray unit to detach, possibly resulting in injury.

Positions of the **ACAUTION** Label

This machine has a \(\triangle CAUTION \) label at the position shown below. For safety, please follow the instructions and handle the machine as indicated.

The inside of the machine becomes very hot. Do not touch the inside. Doing so could result in a burn.

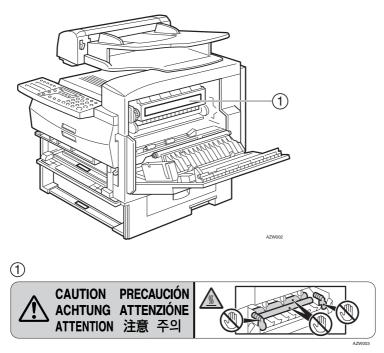

High temperature. Be careful of hot parts when clearing paper

User Information on Electrical & Electronic Equipment

Users in the EU, Switzerland and Norway

Our Products contain high quality components and are designed to facilitate recycling.

Our products or product packaging are marked with the symbol below.



The symbol indicates that the product must not be treated as municipal waste. It must be disposed of separately via the appropriate return and collection systems available. By following these instructions you ensure that this product is treated correctly and help to reduce potential impacts on the environment and human health, which could otherwise result from inappropriate handling. Recycling of products helps to conserve natural resources and protect the environment.

For more detailed information on collection and recycling systems for this product, please contact the shop where you purchased it, your local dealer or sales/service representatives.

All Other Users

If you wish to discard this product, please contact your local authorities, the shop where you bought this product, your local dealer or sales/service representatives.

ENERGY STAR Program

ENERGY STAR® Program



The ENERGY STAR $^{\oplus}$ Program encourages energy conservation by promoting energy efficient computers and other office equipment.

The program backs the development and dissemination of products that feature energy saving functions.

It is an open program in which manufacturers participate voluntarily.

Targeted products are computers, monitors, printers, facsimiles, copiers, scanners, and multifunction devices. Energy Star standards and logos are internationally uniform.

Low-power Mode

At the factory, this fax machine is set to enter the low power mode after no operation takes place for more than 5 minutes. To exit the low power mode, press the **[Energy Saver/Clear Modes]** key. The machine starts printing in about 40 seconds in the Energy Saving Standby mode, or in about 30 seconds in the Fax Standby Mode.

Specification

Low-power mode	Power Consumption	1.5W
	Default Time	5 minutes

Energy Saving Modes

Energy Saving mode enables you to avoid using unnecessary power and economize on electricity. Although we recommend you use this mode from the viewpoint of environmental consciousness, you can also turn it off.

When you install this machines for the first time, Energy Saving mode is turned on by default.

Two types of Energy Saving mode are available:

- Fax Standby: Use when you receive faxes regularly.
- Energy Saving Standby: Use when you wish to economize on power consumption.

Choose the one that best suits your circumstances.

Even though the operation panel display goes out in Energy Saving mode, Indicators that flash or light during communication or reception still work. When the Receive File indicator lights, exit Energy Saving mode and take the appropriate action.

Energy Saving Mode Type	Status	How long before you can print after exiting Energy Sav- ing mode	Power consumption
Fax Standby	Display turns off The machine maintains the heating roller temperature at half the full temperature; warm up takes less time. (Heater half cool)	Within about 30 seconds	40W
Energy Saving Standby	Display turns off The machine lets the heating roller cool to room temperature; warm-up takes longer.(Heater off)	Within about 40 seconds	1.5W

You can turn Energy Saving mode on or off with User Parameter. When the machine is shipped, Energy Saving Standby is selected on.

The machine enters Energy Saving mode when:

- Nobody uses the machine for about 5 minutes (the machine automatically enters Energy Saving mode)
- The user holds down the Energy Saver key for about 2 seconds.

To exit Energy Saving mode:

- In Energy Saving Standby mode, press the Energy Saver key.
- In FAX Standby mode, press any key.
- Set a document.
- Pick up the optional handset or the external telephone handset.

Ø.	N	ot	_

- ☐ When you load paper in Energy Saving mode, no error will be displayed even if the cassette is not pushed right in.
- ☐ After loading paper, press the Energy Saver key and check that "READY" is shown on the display.

The Manual Receive indicator goes out in Energy Saving mode even if Manual Receive is turned on.

Reception in Energy Saving mode

In Energy Saving mode, documents that have been stored in memory are still sent and the machine can still receive messages.

When a message is received in Energy Saving mode, the machine prints it and returns to Energy Saving mode.

Limitation

It is not possible to enter Energy Saving mode when an original is set.

Recycled Paper

In accordance with the ENERGY STAR Program, we recommend use of recycled paper which is environmentally friendly. Please contact your sales representative for recommended paper.

How to Read this Manual

Symbols

The following set of symbols is used in this manual.

↑ WARNING:

This symbol indicates a potentially hazardous situation that might result in death or serious injury when you misuse the machine without following the instructions under this symbol. Be sure to read the instructions, all of which are described in the Safety Information section.

⚠ CAUTION:

This symbol indicates a potentially hazardous situation that might result in minor or moderate injury or property damage that does not involve personal injury when you misuse the machine without following the instructions under this symbol. Be sure to read the instructions, all of which are described in the Safety Information section.

* The statements above are notes for your safety.

∰Important

If this instruction is not followed, paper might be misfed, originals might be damaged, or data might be lost. Be sure to read this.

Preparation

This symbol indicates information or preparations required prior to operating.

Note

This symbol indicates precautions for operation, or actions to take after abnormal operation.

Limitation

This symbol indicates numerical limits, functions that cannot be used together, or conditions in which a particular function cannot be used.

₽ Reference

This symbol indicates a reference.

Keys built into the machine's control panel.

Manuals for This Machine

Two Facsimile Reference manuals are provided, the Basic Features manual and the Advanced Features manual. Please refer to the manual that suits your needs.

Basic Features (this manual)

The Basic Features manual explains the most frequently used fax functions and operations.

Advanced Features (on CD-ROM)

Each language version is in an appropriate folder on the CD-ROM in PDF format. Please open the Fax folder and choose the language version of your preference. Adobe Acrobat Reader/Adobe Reader is required in order to read these files. If Adobe Acrobat Reader/Adobe Reader is not installed on your computer, install it from the CD-ROM containing the Advanced Features manual.

☐ A PDF file might not be displayed or printed properly depending on the environment or language you use.

The Advanced Features manual describes more advanced functions, and also explains settings for key operators.

Chapter 1 Transmission Options

Explains about sending at a specific time without having to be by the machine and also taking advantage of off-peak telephone line charges.

Chapter 2 Job Information

Explains about erasing a fax message stored in memory and checking the contents of any files in memory.

Chapter 3 Other Transmission Features

Explains about useful features for transmission. You can find out about dialing numbers easily.

Chapter 4 Reception Features

Explains about reception features. You can find out about screening out message from anonymous senders.

Chapter 5 Copying

Explains about copying operations and functions.

Chapter 6 Facsimile User Tools

Explains about programming frequently used functions for User Function Key and setting the Date and Time.

Chapter 7 Key Operator Settings

Explains about functions the key operator handles . You can find out how to change the user parameter settings.

Chapter 8 Solving Operation Problems

Explains about things you should do when an Error Report is printed and power is turned off.

Chapter 9 Maintaining Your Machine

Explains about changing the paper size in the paper trays, cleaning the scanner and so on.

Chapter 10 Installation

Explains about installation considerations, connecting to a telephone line, and connecting the power.

Chapter 11 Appendix

You can check the specifications for this machine.

System Requirements

To run the FACSIMILE CD-ROM Manual, you need the following:


System: Windows 95, Windows 98, Windows Me, Windows NT 4.0, Windows 2000 or Macintosh Computer

However, operation cannot be assured under all circumstances. Please be aware that the manual may not run with certain computers and/or operating system versions.

1. Getting Started

Guide to Components

Front View



AZW004

1. ADF Cover

Cover for the document feeder (ADF).

2. Release Button

Push this button to open the document feeder.

3. Document Feeder (ADF)

Originals will be fed automatically.

4. Output Tray

Received fax messages and copies are stacked here.

5. Control Panel

Operate the machine using keys and watching the display on the Control Panel.

6. Front Cover

Open this cover when changing the toner cassette and the photo conductor unit inside the machine.

7. Main Paper Tray

Load paper here.

8. Paper Tray Unit (Option)

You can load more paper here.

9. Lower Right Cover

Open this cover to remove jammed paper fed from the optional paper tray unit.

10. Bypass Tray (Option)

A fax message can be printed, and the original is copied on the paper placed here.

11. Right Cover

Open this cover to remove jammed paper fed from the paper tray.

12. Original Output Tray

Scanned originals are stacked here.


13. Original Tray

Place originals here for sending a fax and copying.

14. Original guide

Adjust the original guide to match the size of the originals.

Side View

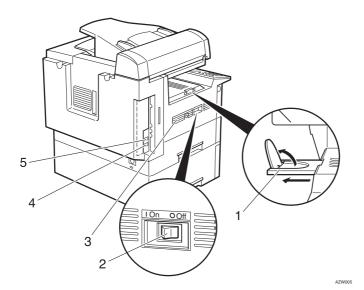

1. Output tray guide

Pull out and raise the end fence to support large papers.

2. Power Switch

The power switch turns your machine on and off.


3. Ventilation hole

Prevents overheating. Do not obstruct the ventilation hole by placing an object near it. If the machine overheats, a fault might occur.

4. G3 Line Connector

5. External Telephone Connector

Control Panel

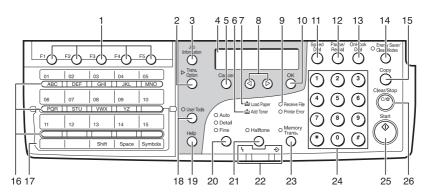

ZFWS030E

1. User Function keys

Each of these can be programmed for rapid access to frequently used functions.

Functions Programmed by Default

Key	Function
F1	Print Journal
F2	FAX Header Print
F3	TX Result Report
F4	Group Dial
F5	Dial Option

2. [Trans. Option] key

Press to change the transmission option settings. The indicator lights when option settings are changed.

3. [Job Information] key

Press to search for information on a specific job.

4. LCD display

This guides you through tasks and informs you of the machine status. A message appears here.

5. [Cancel] key

Press to cancel an operation or return to the previous display.

6. Add Toner indicator

Blinks when toner is about to runout and lights continuously when toner has run out.

7. Load Paper indicator

Lights when a paper tray is empty or the paper tray is not fully inserted.

8. **④ ⓑ** keys

Press to move the cursor or select functions.

9. Receive File indicator

Lights when a message has been received into memory.

10. [OK] key

Press to answer "Yes" to a question displayed on the display.

11. [Speed Dial] key

Press to select a Speed Dial.

12. [Pause/Redial] key

Pause: Inserts a pause when you are dialing or storing a fax number. A pause cannot be inserted as the first digit.

Redial: Press to redial one of the last ten numbers.

13. [On Hook Dial] key

Use to dial a number from the numeric keypad without having to lift the handset.

14. [Energy Saver/Clear Modes] key

Energy Saver: Hold down 2 seconds to select or deselect energy saver mode. When the machine is not used for a fixed period, the machine goes into energy saver mode automatically.

Clear Modes: Press to clear any selected settings and return the machine to its previous condition.

15. [Copy] key

Press to copy the original currently loaded in the feeder.

16. Quick Dial keys

Use to dial numbers with a single touch or to enter letters and symbols. Also use for the Group Dial function.

17. Quick Dial Key Flip Plate

Flip down to access Quick Dials [01] to [15], and flip up to access Quick Dials [16] to [30].

Ø Note

☐ Make sure the plate is flat against the control panel.

18. [User Tools] key

Press to enter User Tools mode. These tools allow you to customize the default settings.

19. [Help] key

Press the Help key when you want to print a help list.

20. [Resolution] key

Press to switch between **Standard**, **Auto**, **Detail** and **Fine**. When the indicator is not lit, **Standard** is selected.

21. [Halftone] key

Select halftone when faxing or copying photographs or illustrations with fine gradations. Also can be used for color originals.

22. Status Indicators

These indicators keep you informed about the current status of the unit.

• 4 Alarm

When the alarm indicator flashes, check the display and read the message to identify the problem (such as a paper jam or open cover).

 Communicating Lights during fax transmission or reception.

23. [Memory Trans.] key

Press this key to switch between Memory Transmission and Immediate Transmission modes.

When the indicator is not lit, Immediate Transmission is selected, and when the indicator is lit, Memory Transmission is selected.

24. Number keys

Use to dial fax numbers or enter the number of copies.

25. [Start] key

Press to start all tasks.

26. [Clear/Stop] key

Clear: Deletes one character or digit.

Stop: Interrupts the current operation (transmission, scanning, copying or printing).

Starting the Machine


To start the machine, turn on the power switch.

Note

☐ This machine automatically enters Energy Saver mode if you do not use the machine for a while.

Turning On the Power

- Confirm that the power cord is plugged into the outlet firmly.
- **2** Turn on the power switch.




Turning Off the Power

∰Important

☐ Make sure that 100% is shown on the Fax standby display before you turn off the power switch or you unplug the power cord. Fax files programed in memory will be deleted 12 hours or more after you turn off the power switch or you unplug the power cord. The storage time might be shorter if the surrounding temperature is low or the machine has been on for less than a week.

1 Turn off the power switch.



Reading the Display

The machine status and instructions are shown on the display.


#Important

- □ Do not apply a strong shock or force of about 30N *1 (about 6.8 lbf *2) or more to the panel display. Otherwise, the display might be damaged.
- *1 N = Newton
- *2 lbf = weight pound

Note

☐ This machine automatically returns to the standby display if you do not use the machine for a certain period of time. You can select the period in Fax Reset Timer. See p.63 "Setting the Fax Reset Timer", *Advanced Features*.

Reading the Display and Using Keys



- ① Display for the machine status or currently selected function.
- ② Display for the messages. Items which can be selected or specified.
- 3 Display for items which can be selected.

Note

- ☐ Press ④ or ⑤ to display another function on the LCD display or move the brackets to select another values.
- ☐ Press the **[OK]** key to set a selected function or entered value, and return to the previous display.
- ☐ Press the **[Cancel]** key to cancel the selected function or entered value, and return to the previous display.

Standby Display

While the machine is in standby display (immediately after it is turned on or after the [Cancel] key is pressed), the following display is shown.

○Ready 100% 10:15 Set Orig. / Enter No.



- ☐ To return the machine to standby display, do one of the following:
 - If you have set the original and have not pressed the [Start] key, remove the original.
 - If you have not set an original, press the [Cancel] key.
 - If you are in User Tools mode, press the [User Tools] key or the [Cancel] key.

Communication Display

While the machine is communicating, the status is displayed.

Display during Memory Transmission or Reception:

The destination's name or fax number appears on the top of the LCD display.

ABC COMPANY Set Orig. / Enter No.

Note

Even when the machine is sending or receiving a fax message from/into memory, you can still scan the next original into memory.

Immediate Transmission:

ABC COMPANY Transmitting...

Display Prompts

Depending on the situation, the machine will show various prompts on the display.

Instructions and Requests

Send	Later:	Press	OK
Time	[09:58]		

Questions

Store as Wildcard? [Yes] No

Selections

Label Insertion: ♠/OK [On] Off

Status

ABC COMPANY Dialing...

2. Faxing

Transmission Modes


There are two types of transmission.

Memory Transmission

When a fax document is stored in memory, then transmission starts automatically.

This makes it convenient when you would like to take documents back in a hurry.


You can send the same message to more than one destination in a single operation. This technique is referred to as Broadcasting.



❖ Immediate Transmission

The machine dials immediately, and transmits the fax while scanning.

It is convenient when you would like to send a document immediately, and would like to check whether you have successfully connected with the other party's fax machine. A fax document is not stored in memory.




Important

☐ If there is a power failure, the power switch is turned off, or the plug is pulled out for a certain period of time, all documents stored in memory are deleted. As soon as power is restored, the Power Failure Report is printed to help you identify deleted documents. See p.103 "Power Failure Report", Advanced Features.

Switching between Memory Transmission and Immediate Transmission

Press the [Memory Trans.] key to switch between Memory Transmission and Immediate Transmission. When the indicator of the [Memory Trans.] key is not lit, Immediate Transmission is selected. When the indicator of the [Memory Trans.] key is lit, Memory Transmission is selected.




Note

- ☐ You can set whether the machine is in Memory Transmission mode or Immediate Transmission mode right after the power is turned on with the User Parameters (Switch 00 Bit 6). See p.84 "User Parameters", Advanced Features.
- ☐ You can set whether the Transmission mode returns to the default mode after each transmission with the User Parameters (Switch 01 Bit 7). See p.84 "User Parameters", Advanced Features.


Setting Originals

You can set your originals in the Document Feeder.

How to set A4, B5 JIS (Japanese Industrial Standard), A5, 5¹/₂"×8¹/₂", 8¹/₂"×11, 8¹/₂"x14" and 8"x13" size originals



❖ How to set A5 and 8¹/₂"× 5¹/₂"size originals



Note

- □ When sending a fax, the image output at the other end depends on the size and direction of paper used in the receiver's terminal. If the receiver does not use paper of the same size and direction as that of the original, the fax image size may be reduced on output, trimmed at the both edges, or divided into two or more sheets. When sending an important original, we recommend that you ask the receiver about the size and direction of the paper used in their terminal.
- ☐ Make sure that all ink, correcting fluid, etc., has completely dried before setting your original. If it is still wet, the scanner will be marked and those marks will appear on the received image.
- ☐ You can set the original any time up until you press the [Start] key.

Loading Originals in the Document Feeder

Use the Document Feeder to scan in a stack of originals in one operation. The Document Feeder can handle single-sided originals.


Note

- ☐ The maximum document length is 600mm (23.7") with manual assistance.
- ☐ Place all the originals to be sent in a single stack.
- Do not open the Document Feeder while it is scanning the originals or your document could be jammed.

- ☐ If an original jams, press the **[Clear/Stop]** key, and then remove the original carefully.
- ☐ If your original is bent or folded, flatten it before you set it.

For information about the sizes and number of originals that can be placed in the Document Feeder, see p.127 "Originals", Advanced Features.

Adjust the document guide to match the size of your originals. Align the edges of your originals and stack them in the Document Feeder face up. Adjust the document guide to match the size of the originals again.



Note

 \square Set the originals gently.

For details about unsuitable originals, see p.127 "Originals unsuitable for the Document Feeder (ADF)", Advanced Features".

Original Sizes Difficult to Detect

The machine finds it difficult to detect the size of the following kinds of originals.

- Originals with index tabs, tags, or projecting parts
- Transparent originals, such as OHP transparencies or translucent paper
- Dark originals with many characters or drawings
- Originals which partially contain solid printing
- Originals which have solid printing at their edges

Memory Transmission

Memory Transmission is convenient because:

- Fax documents can be scanned much more quickly. Your scanned document is stored in the memory, and then sent automatically, meaning you do not have to wait for your document to send.
- While your fax document is being sent, another user can operate the machine (people do not have to wait long to use the fax machine).
- You can send the same document to more than one place with the same operation. (Broadcasting)
- There are two kinds of Memory Transmission: Parallel and Normal. See p.29 "Parallel Memory Transmission", Advanced Features.

#Important

☐ If there is a power failure (power switch is off) or the plug is pulled out for a certain period of time, all the files stored in memory are deleted. As soon as the power switch is turned on, the Power Failure Report is printed to help you identify deleted files. See p.103 "Power Failure Report", Advanced Features.

Limitation


☐ If memory is full (0% appears on the display), Memory Transmission is disabled. Use Immediate Transmission instead.

Ø Note

- ☐ Maximum number of Memory Transmission files: 140
- ☐ Maximum number of destinations per Memory Transmission: 140
- ☐ Combined total number of destinations that can be stored: 300

- ☐ The theoretical maximum number of destinations you can enter with the number keys is 69, but this will depend on the amount of memory currently available.
- ☐ The number of pages that you can store in memory depends on the original images and the scan settings. You can store up to 640 standard pages (ITU-T #1 chart, Resolution: Standard, Original Type: Text).
- ☐ You can set whether the machine returns to the default transmission mode after every transmission with the User Parameters. See p.84 "User Parameters", Advanced Features(Switch 01, Bit 7).

Make sure that the Memory Transmission indicator is lit.



If it is not lit, press the [Memory Trans.] key.

2 Set the original.

Note

☐ Do not open the Document Feeder while it is scanning in originals.

p.25 "Setting Originals"

- Select any scan settings you require. See p.34 "Scan Settings".
- Dial. If you wish to send the same message to more than one destination, press the [OK] key, and then dial another destination. Repeat this step for all destinations.

Dest.1 OK to Add ☎1234567890


If you make a mistake, press the **[Clear/Stop]** key, and then enter the correct number again.

Note

□ When specifying a destination using a Quick Dial, the destination is added even if you did not press the [OK] key.

PReference p.36 "Dialing"

Press the [Start] key.



1234567890 File No.054 P.001 99%

The machine starts scanning the original.

The machine calls the destination. The name or fax number which is programmed as the Own Name or Own Fax Number at the other end is shown on the top of the display.

p.43 "Own Name/Fax Header/Own Fax Number"


()Ready 100% 10:15 Set Orig. / Enter No.

After transmission, the machine will return to standby display.

Canceling a Memory Transmission

Before the Start Key is Pressed

Press the [Energy Saver / Clear Modes] key.




Note

☐ When you have already set the original, you can also cancel the transmission by removing the original from the machine.

While the Original is Being Scanned

1 Press the [Clear/Stop] key.




The machine will stop storing the original and the data will not be sent.

During Transmission

Use this procedure to cancel a transmission after the original has been scanned.

- ☐ If transmission finishes while you are carrying out this procedure, it will not be canceled.
- ☐ If you cancel a message while it is being sent, transmission is halted as soon as you finish this procedure. However, some pages of your message may have already been sent and will be received at the other end.
- Press the [Job Information] key, and confirm that "1. Cancel TX / RX" is displayed.



Job Information: 1.Cancel TX / RX **♦**


The Information menu is shown.

Press the [OK] key.

Display the file you want to delete.

Enter the file number with the number keys, or search using ③ or ⑤.

- Press the [OK] key.
- Press @ or D to select "Yes"



6 Press the [OK] key.

()Ready 100% 10:15 Set Orig. / Enter No.


The file is erased, and the machine will return to standby display

While the Original is Awaiting Transmission



☐ Pages already being sent to the destination cannot be canceled, even if you cancel the transmission. The transmission may be sent before you can cancel it, even if you start canceling the transmission before it is fully sent.

Press the [Job Information] key, and confirm that "1. Cancel TX / RX" is displayed.



Job Information: 1.Cancel TX / RX **♦**

- Press the [OK] key.
- Display the file you want to delete.

Enter the file number with the number keys, or search using ③ or ⑤.

If you are unable to find the file, it has already been sent.

- Press the [OK] key.
- Press @ or D to select "Yes ".

6 Press the [OK] key.

⊘Ready 100% 10:15 Set Orig. / Enter No.

The file is erased, and the machine will return to standby display


Immediate Transmission

Immediate Transmission is convenient when:

- You wish to send a document immediately as it is scanning.
- You wish to quickly check whether you have successfully connected with the other party's fax machine.
- Your machine's memory is getting full.

The machine dials immediately after you press the **[Start]** key. The message is scanned and transmitted page by page without being stored in memory.

- ☐ You can only specify one destination for Immediate Transmission.
- ☐ You can set whether the machine is in Memory Transmission mode or Immediate Transmission mode right after the power is turned on with the User Parameters.
- ☐ The machine does not redial with immediate transmission.
- 1 Check that the Memory Transmission indicator is not lit.




If it is lit, press the [Memory Trans.] key.

2 Set your original.

p.25 "Setting Originals"

- Select any scan settings you require. See p.34 "Scan Settings".
- Dial.




If you make a mistake, press the [Clear/Stop] key, and then enter the correct number again.

p.36 "Dialing"

See p.19 "Chain Dial", Advanced Features.


Press the [Start] key.



The machine calls the destination. While it is dialing, the number or name which is programmed as the Own Name or Own Fax Number in the machine of the other party is shown on the display. When connected, the machine starts scanning the original.

1234567890 Dialing...

p.43 "Own Name/Fax Header/Own Fax Number"




After transmission the machine will return to standby display.

2

Canceling an Immediate Transmission

Before the Start key is Pressed

Press the [Energy Saver / Clear Modes] key.



Note

☐ When you have already set the original, you can also cancel the transmission by removing the original from the machine.

After the Start key is Pressed

Press the [Clear/Stop] key, and then remove the original.



Note

☐ If the transmission finishes while you are carrying out this procedure, it will not be canceled.

Scan Settings

You may wish to send many different types of fax messages. Some of these may be difficult to reproduce at the other end. However, your machine has three settings that you can adjust to help you transmit your document with the best possible image quality.

- Resolution: Standard, Detail, Fine, Auto
- Original Type: Halftone

Resolution

Images and text are scanned into the machine by converting them to a sequence of dots. The frequency of dots determines the quality of the image and how long it takes to transmit. Therefore, images scanned at high resolution (Fine) have high quality but transmission takes longer. Conversely, low resolution (Standard) scanning results in less quality but your original is sent more quickly. Choose the setting that matches your needs based upon this trade off between speed and image clarity.

- Standard (8×3.85 lines/mm, 200×100dpi) Select for originals containing normal sized characters.
- Detail (8×7.7 lines/mm, 200×200dpi) Select for originals containing small characters or when you require greater clarity. This resolution is twice as fine as Standard.

- Fine (8×15.4 lines/mm, 200×400dpi) Select for originals with very fine details or when you require the best possible image clarity. This resolution is four times as fine as Standard.
- Auto (8×3.85 lines/mm, 200×100dpi) and (8×7.7 lines/mm, 200×200dpi) Select for originals containing normal size characters and small size characters. The machine will choose either Standard or Detail for originals automatically.


Limitation

- ☐ If the other party's machine does not support the resolution at which you are sending, this machine automatically switches to a resolution which is supported.
- ☐ Sending with **Fine** resolution requires that the other party's machine has the capability to receive fax messages at **Fine** resolution.

Note

- ☐ The resolution returns to the default setting after every transmission. You can change this with the User Parameters (Switch01, Bit7). See p.84 "User Parameters", Advanced Features.
- □ Auto resolution can be selected when the machine is in memory transmission mode and it can not be selected when the machine is in immediate transmission mode.
- Standard Memory Transmission is used instead of Parallel Memory Transmission when **Auto** resolution is selected.
- ☐ **Auto** resolution can not be selected when copying.

- ☐ Usually, transmission takes shorter when Auto resolution is selected than Detail resolution is selected. However, transmission for some originals containing normal size characters and small size characters takes longer because resolution modes are changed.
- Press the [Resolution] key to switch between resolutions. The indicators above the key show the current selection. When none of the indicators are lit, Standard is selected.



Original Type

If your original contains photographs or colored illustrations, select Halftone to optimize image clarity.


Halftone

Select **Halftone** to send an original containing a halftone image such as a photograph or a color original.

Note

- ☐ If you select **Halftone**, resolution is automatically set to **Detail**. Even if you do not select Halftone again, the resolution will not return to **Standard**.
- ☐ If you select **Halftone**, the transmission will take longer than when it is not selected.

- ☐ You can set whether the machine returns to the Original Type default setting after every transmission with the User Parameters (Switch 01 Bit 7). See p.84 "User Parameters", Advanced Features.
- 1 Press the [Halftone] key.



Dialing

There are four main ways to dial a number:

- Entering Numbers Directly See p.36 "Entering Numbers Directly"
- ❖ Using Quick Dials: See p.37 "Using Quick Dials"
- ❖ Using Speed Dials: See p.38 "Using Speed Dials"
- ❖ Using Groups See p.39 "Using Groups"

Entering Numbers Directly

Enter numbers directly using the number keys on the right side of the operation panel.

Ø Note

- ☐ Maximum length of a fax number: 254 digits.
- ☐ You can insert pauses and tones in a fax number. See p.37 "Pause", p.37 "Tone"
- ☐ A pause is shown as a "-" on the display.
- Make sure that the machine is in standby display.
- 2 Set your original and select any scan settings you require.

⊘Ready 100% 10:15 Enter Fax Number

Enter the fax number with the number keys.

The digits appear on the display as you enter them.

Dest.1 Press Start **☎**1234567890**000000000**

- If you make a mistake, press the [Clear/Stop] key and enter again.
- ☐ If you wish to send this message to more than one destination, press the [OK] key, and then enter the next destination.
- Press the [Start] key.

Limitations when dialing with the number keys

Fax numbers entered with the number keys are stored in internal memory (separate from memory for storing original data). Therefore, using the number keys, you cannot program 69 or more numbers for the following:

- Destinations specified in a Memory Transmission (including Polling Reception)
- Destinations specified in a Group


For example, when 60 destinations are registered in a Group with the number keys, only 9 destinations can be dialed for Memory Transmission from the number keys.

Note

- ☐ If a memory file is awaiting transmission and the "Exceeded the Max.Cannot Add" message is displayed when dialing with the number keys, you cannot dial any more numbers. That is because the fax numbers have been dialed with the number keys for some of the files awaiting transmission. When these files have been sent and their fax numbers are deleted from memory, additional fax numbers can be dialed.
- ☐ The display shows the percentage of free memory space for storing originals. Since fax numbers are stored in separate memory, dialing fax numbers with the number keys does not change the percentage on the display.

Pause

Press the **[Pause/Redial]** key when dialing or storing a number to insert about a two-second pause.



Note

- ☐ You cannot insert a pause before the first digit of a fax number.
- ☐ A pause is shown as a "-" on the display.
- You can insert a pause in numbers stored in Quick Dials and Speed Dials.

Tone

This function allows a machine connected to a pulse dialing line to send tone signals (for example if you want to use a special service on a tone dialing line). When you press the [*\frac{\frac{1}}{2} \frac{1}{2} \frac{1}

Note

- ☐ You cannot place a tone before the first digit of a fax number.
- ☐ Some services may not be available when using the [★] key.
- ☐ A tone is shown as a "•" on the display.

Using Quick Dials

You can specify destinations simply by pressing the Quick Dial.

You must program the destination's fax number in a Quick Dial beforehand.

Additionally, you can store a name for the destination in Quick Dials.

Note

- ☐ To register, edit, or delete a Quick Dial, see p.47 "Quick Dial"
- ☐ To check the contents of all Quick dials, print the quick Dial list. See p.54 "Printing Reports/Lists", Advanced Features.
- You can have the label stored with a Quick Dial printed on the first page received at the other end.

${\mathcal P}$ Reference


p.36 "Dialing"

1 Make sure that the machine is in standby display.

2 Set your original and select any scan settings you require.

⊘Ready 100% 10:15 Enter Fax Number

Press the Quick Dial key in which the destination's number is programmed.



If the destination's name has been stored, the name is shown on the display. If it is not, the fax number is shown.

Dest.1 OK to Add ☎001 ABC COMPANY

- ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
- ☐ If you wish to dial another destination, press the [OK] key and dial another fax number.
- Press the [Start] key.

Using Speed Dials


You can specify destinations simply by pressing the **[Speed Dial]** key and a Speed Dial code (00 to 99).

You must store the destination's fax number in a Speed Dial beforehand. Additionally, you can store a name for the destination in Speed Dials.

- Note
- ☐ To register, edit, or delete Speed Dial entries, see p.53 "Speed Dial"
- ☐ To check the contents of all Speed Dials, print the Speed Dial list. See p.54 "Printing Reports/Lists", Advanced Features.
- ☐ You can use codes 00-99 for Speed Dials.
- ☐ If a search letter is registered with a Speed Dial, you can find this number quickly using the Telephone Directory function. See p.20 "Telephone Directory", Advanced Features.
- You can have the label stored with a Speed Dial printed on the first page received at the other end.
- Make sure that the machine is in standby display.
- 2 Set your original and select any scan settings you require.

⊘Ready 100% 10:15 Enter Fax Number

Press the [Speed Dial] key.



ZFWS13

Speed Dial: Enter No. [∰∎∎]

Enter the two digit code (00 to 99) for the destination with the number keys.

Dest.1 OK to Add ☎월00 DEF COMPANY

- ☐ When a name is stored for the destination, the name is displayed, and when no name is stored, the fax number is displayed.
- ☐ If you wish to dial another destination, press the [OK] key and dial another fax number.
- ☐ If you make a mistake, press the **[Clear/Stop]** key, and try again.
- Press the [Start] key.

Using Groups

You can store multiple destinations as a single Group and simply specify a particular Group.

You must store the destinations' fax number in a Group beforehand.

Additionally, you can store destination names and a Group name in Groups.

The method for specifying Groups differs according to the way they were programmed.

- When programmed in a Quick Dial: Press the Quick Dial key.
- When not programmed in a Quick Dial: Use the User Function Key. Group Dial is assigned to [F4] as a default setting. If this setting is changed, program the Group function in a User Function key ([F1] to [F5]). When you want to specify a destination, press the User Function key in which the Group Function is programmed, and then press the Group number with the number keys. See p.51 "User Function Keys", Advanced Features.

Limitation

You cannot use Immediate Transmission to send Groups. You can only use Memory Transmission.

Note

- Quick Dials programmed for Groups cannot be used for any other function.
- ☐ To register, edit, or delete Groups, see p.58 "Groups"
- ☐ To check the contents of all Groups, print the Group Dial list. See p.54 "Printing Reports/Lists", *Advanced Features*.

When Specifying a Group with a Quick Dial

Make sure that the Memory Transmission indicator is lit, if not, press the [Memory Trans.] key to light it.

Note

- ☐ You must register Groups to Quick Dials beforehand. See p.58 "Groups"
- Make sure that the machine is in standby display.
- 2 Set your original and select any scan settings you require.

○Ready 100% 10:15 Enter Fax Number

Press the Quick Dial key in which the Group is programmed.

Dest.1 Press Start ☎∭02:Gp.D1 EUROPE1

Note

- ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
- If you wish to dial another destination, press the [OK] key, and then dial another fax number.
- Press the [Start] key.

When Specifying a Group with the Group key

Make sure that the Memory Transmission indicator is lit, if not, press the [Memory Trans.] key to light it.

Note

- ☐ Group Dial is assigned to **[F4]** as a default setting. If this setting is changed, you must program the Group function in a User Function key beforehand. See p.51 "User Function Keys", *Advanced Features*.
- Make sure that the machine is in standby display.
- 2 Set your original and select any scan settings you require.

○Ready 100% 10:15 Enter Fax Number

Press the User Function key programmed with the Group function.

Group Dial: Enter No. [Gp.D∎]

Enter the Group number (1 to 5) with the number keys.

Dest.1 Press Start ☎Gp.D1 EUROPE1

- ☐ If you want to specify another Group, press the [OK] key, and then repeat step above.
- ☐ If you make a mistake, press the [Clear/Stop] key, and the display will return to that in step ②.
- Press the [Start] key.

Reception Modes

The machine can treat incoming fax messages and telephone calls in three ways.

Manual Receive

Use this mode if your line is shared by a fax machine and a telephone but you wish to answer all calls yourself and decide whether they are fax documents or telephone calls. You must manually press the [Start] key to receive a fax.

The machine will ring continuously until you answer the call, so you have to be near the machine at all times.

Auto Receive

Use this mode if you have a dedicated fax line. The machine assumes all calls are fax documents. It will ring once to alert you of an incoming call, and then starts receiving.

❖ Auto Select

In this mode, the machine rings a number of times. You can answer the call while the machine is ringing. If you do not answer the call, the machine automatically changes to receive fax messages.

Note


- ☐ You can change the number of rings. See p.60 "Setting the Auto Ring Time", *Advanced Features*.
- When the other party send a fax message, the machine changes to receive the fax message automatically.
- You can connect a telephone answering machine with Auto Select.


- Set a smaller number of rings for the telephone answering machine than for the fax machine.
- ☐ It could not be work correctly depends on a telephone answering machine.

Selecting the Reception Mode

Select the Reception Mode using the following procedure.

Press the [User Tools] key.






Press (a) or (b) until " 2. Fax Features " is displayed.


User Tools: 2.Fax Features **♦**

Press the [OK] key.


Fax Features: 1.Program / Delete ◆▶ Press @ or © until " 3. Setup " is displayed.




Press the [OK] key.




Press (a) or (b) until " 5. Reception Mode " is displayed.



7 Press the [OK] key.



Press @ or > to select the reception mode.



- Press the [OK] key.
- Press the [User Tools] key to return to the standby display.

⊘Ready 100% 10:15 Set Orig. / Enter No.

3. Registering

Own Name/Fax Header/Own Fax Number

Make sure that all necessary settings are made before connecting your machine to the telephone line.

Own Name

This should be your name or company name, in 20 characters or less. During communication, if the other party's fax machine supports Own Name, this replaces the Own Fax Number that follows. This name will appear on the display of the other party's fax machine, and the name registered on that machine will appear on yours.

Limitation

☐ The registered name will not be used unless the other party has the same machine of the same make that supports the Own Name function.

Fax Header

This is ordinarily your name or company name. Your fax header can be up to 32 characters long, and is printed on the header of every page you send.

Own Fax Number (Required by international law)

This is your fax machine's phone number that must include country and area codes using 20 characters or less. During any communication, your Own Fax Number appears on their display. (Conversely their Own Fax Number appears on your display.)

☐ In some areas, the Own Fax Number is preprogrammed by your service representative, and cannot be re-programmed by the user.

#Important

When sending a fax, your Own Fax Number is required by international law. You cannot legally connect a fax machine to the telephone system if the Own Fax Number is not programmed.


Note

☐ You can confirm the Own Name, Fax Header, and Own Fax Number settings in the User Parameters List. See p.89 "Printing the User Parameter List", Advanced Features.

Registering

The following procedure describes how to make initial settings.

Press the [User Tools] key.



User Tools:	
1.Counter	•

3

Press ⊚ or ⊚ until "2. Fax Features" is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Press @ or © until " 3. Setup " is displayed.

Fax Features: 3.Setup �

Press the [OK] key.

Setup: 1.Monitor Volume **♦**

Press @ or D until "7. Fax Information" is displayed.

Setup: 7.Fax Information ◆

Press the [OK] key.

Confirm that " 1. Own Name " is displayed.

Press the [OK] key.



Enter your Own Name.

Own Name:[ABC] /OK [MAIN OFFICE**#######**]

Note

☐ If you want to erase a character in the name, press the [Clear/Stop] key.

See p.68 "Entering Characters" for how to enter characters.

Press the [OK] key.

Your Own Name is programmed.

Press (a) or (b) until "2. Fax Header "is displayed.

Press the [OK] key.

The programmed Own Name is displayed.

Header:[ABC] /OK MAIN OFFICE

Enter your Fax Header.

If your Fax Header is the same as your Own Name, go to step **2**.

Header:[ABC] /OK MAIN OFFICE

Press the [OK] key.

Your Fax Header is programmed.


Press ③ or ⑤ until " 3. Own Fax Number " is displayed.

Fax Information: 3.Own Fax Number **♦**▶

Press the [OK] key.



1 Enter your Own Fax Number.



Note

☐ The format of the number is normally as follows: International Dial Prefix, Your Country Code, Your Area Code (do not insert a pause after your Area Code), followed by your telephone number. Check the International Dialing Prefix and the Country Code with your local telecommunications operator.

Characters you can enter include numerals 0-9, plus symbols (+), and spaces.

Press the [OK] key.

Your Own Fax Number is programmed.


Fax Information: 3.Own Fax Number **♦**


Press the [User Tools] key to return to standby display.

Editing

The following procedure describes how to edit initial settings.

Press the [User Tools] key.





Press ③ or ⑤ until " 2. Fax Features " is displayed.


User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Press @ or © until " 3. Setup " is displayed.

Press the [OK] key.




3

Press ③ or ⑤ until "7. Fax Information" is displayed.

Setup: 7.Fax Information ◆

Press the [OK] key.




- Press @ or > to select the item that you want to edit.
- Press the [OK] key.
- Press the [Clear/Stop] key, and then reenter the Number or Name.
- Press the [OK] key.
- Press the [User Tools] key to return to standby display.

Deleting

The following procedure describes how to delete initial settings.

Press the [User Tools] key.




Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**


Press the [OK] key.

Fax Features: 1.Program / Delete ◆▶

Press ⊚ or ⊚ until " 3. Setup " is displayed.



Press the [OK] key.



6 Press **③** or **⑤** until "7. Fax Information" is displayed.

Setup: 7.Fax Information ◆

Press the [OK] key.

Fax Information: 1.Own Name ◆

- Press ③ or ⑤ to select the item that you want to delete.
- Press the [OK] key.
- Press the [Clear/Stop] key.
- Press the [OK] key.
- Press the [User Tools] key to return to standby display.

Quick Dial

To save time, you can program a fax number that you use often into a Quick Dial key. Then, whenever you are sending a message to that location, just press that Quick Dial key to dial.

Registering

The following procedure describes how to register fax numbers in Quick Dial keys. There are 30 Quick Dials available.

You can register the following items in each key:

- Destination fax number (up to 254 digits)
- Destination name (up to 20 characters)
- Label Insertion (whether to print the destination name on faxes sent to this number)

∰Important

☐ We recommend that you print the Quick Dial list and keep it when you program or change fax numbers. See p.54 "Printing Reports/Lists", Advanced Features.


Limitation

☐ When a registered Quick Dial key is being used for a standby Memory Transmission, the message "
This Dial is in Use. Cannot Change. " is shown and you cannot change the destination for this key.

Note

☐ You can confirm fax numbers stored in Quick Dials on the Quick Dial List. See p.54 "Printing Reports/Lists", *Advanced Features*.

Press the [User Tools] key.





Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆▶


Confirm that "1. Program / Delete " is displayed.

Press the [OK] key.

Program / Delete: 1.Prog. Quick Dial ◆


Confirm that "1. Prog. Quick Dial " is displayed.

Press the [OK] key.




Display the number of the Quick Dial key you want to register.

Press a Quick Dial key, or search using @ or D.



Note

- ☐ If a Quick Dial has already been registered, the contents are displayed. Press ④ or ⑤ to select a Quick Dial that is not programmed, and then press the [OK] key.
- 2 Enter a fax number with the number keys.



Note

- ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
- ☐ If you press the [Pause/Redial] key, the last 10 fax numbers dialed are displayed. Press ④ or ⑤ to select the fax number you want to specify, and then press the [OK] key.
- □ Make sure a Dial Option is stored in one of the User Function keys, and then enter the other party's fax number, and then press the User Function key that contains the Dial Option. You can specify SUB or SEP, SID and PWD. See p.23 "SEP Code", Advanced Features or p.24 "SUB Code", Advanced Features.

Press the [OK] key.

The fax number is programmed.



9 Enter the destination name.




Note

□ Under rare circumstances, garbled characters may appear during name registration if you use the **[Pause/Redial]** key to display the fax number of parties located in other countries. If this happens, simply delete the garbled characters using ③ or ⑤ and the **[Clear/Stop]** keys, then go on to enter the name.

Press the [OK] key.


The name is programmed.



Press ③ or ⑤ to select "On" or "Off".

𝒯 Note

☐ Label insertion allows the receiver's name that is programmed in Quick Dial or Speed Dial to be printed on the fax when it is received at the other end. See p.7 "Label Insertion", Advanced Features.



Press the [OK] key.

Program / Delete: 1.Prog. Quick Dial ◆


If you want to store another Quick Dial, go to step **5**.

Press the [User Tools] key to return to standby display.

Editing

The following procedure describes how to edit fax numbers registered in Quick Dial keys.

Press the [User Tools] key.



Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Confirm that " 1. Program / Delete " is displayed.

Press the [OK] key.

Program / Delete: 1.Prog. Quick Dial ◆▶

Confirm that "1. Prog. Quick Dial" is displayed.

Press the [OK] key.

Press Key to Program (Browse**∢**▶)

Display the number of the Quick Dial key you want to edit.

Press a Quick Dial key, or search using ③ or ⑤.

- Press the [OK] key.
- Press the [Clear/Stop] key, and then reenter the fax number with the number keys.
 - Note
 - ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
 - □ If you press the [Pause/Redial] key, the last 10 fax numbers dialed are displayed. Press ③ or ⑤ to select the fax number you want to specify, and then press the [OK] key.
 - ☐ Make sure a Dial Option is stored in one of the User Function keys, and then enter the other party's fax number and press the User Function key that contains the Dial Option. You can specify SUB or SEP, SID and PWD. See p.23 "SEP Code", Advanced Featuresor p.24 "SUB Code", Advanced Features.
- Press the [OK] key.

Press the [Clear/Stop] key, and then reenter the destination name.

Note

- □ Under rare circumstances, garbled characters may appear during name registration if you use the [Pause/Redial] key to display the fax number of parties located in other countries. If this happens, simply delete the garbled characters using ④ or ⑤ and the [Clear/Stop] keys, and then go on to enter the name.
- Press the [OK] key.

The name is programmed.

Label Insertion: ♠/OK On [Off]

Press or to select "On" or "Off".

Note

☐ Label insertion allows the receiver's name that is programmed in Quick Dial or Speed Dial to be printed on the fax when it is received at the other end. See p.7 "Label Insertion", Advanced Features.

Label Insertion: ♠/OK [On] Off

Press the [OK] key.

Program / Delete: 1.Prog. Quick Dial ◆

If you want to store another Quick Dial, go to step **5**.


Press the [User Tools] key to return to standby display.

Deleting

The following procedure describes how to delete fax numbers registered in Quick Dial keys.

Limitation

- ☐ When a Quick Dial key is being used for a standby Memory Transmission, the message "This Dial is in Use. Cannot Delete." is shown and you cannot delete the destination for this key.
- Press the [User Tools] key.



Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆▶

Confirm that "1. Program / Delete " is displayed.

Press the [OK] key.

Press ③ or ⑤ until " 2. Del. Quick Dial " is displayed.

Program / Delete: 2.Del. Quick Dial ◆▶

6 Press the [OK] key.

Press Key to Delete (Browse**∢**)

Display the Quick Dial key that you want to delete.

Press a Quick Dial key or search by pressing ③ or ⑤.



The number of the Quick Dial key and the fax number or name are displayed.

Press the [OK] key.

The stored data (fax number and name) is deleted.

Program / Delete: 2.Del. Quick Dial ◆

If you want to delete another Quick Dial key, go to step **G**.

Press the [User Tools] key to return to standby display.

Quick Dial Key Label (Dial label)

You can print a template that can be used to make labels for Quick Dial keys. The template will have destination or Group names programmed in Quick Dial keys.

Limitation

☐ Set the label paper to landscape in the Bypass Tray. Portrait position will print the wrong size.

𝒯 Note

☐ To print the label template, see p.54 "Printing Reports/Lists", Advanced Features.

Label paper

	AL LABEL				. <u>!</u>				
	PA EUROPE		· ¦			I DEF COMP	* 		
	¦								
				'	i				
:ABC (00 102 : EURO	PE 103 :	104 :	105 :	1 106 :	107 : DEF C	O I 08 :		10 :
ANY	00 02 : EURO	 13 :	14 :	15 :	I 16 :	07 : DEF C MPANY 17 :	i 18 :	i 19 :	20 :
	122 :	23 :	24 :	25 :	1 126 :	27 :	1 28 :	1 29 :	30 :
	'	'		'			'		'
					1				
						I	1	1	
		!	!	!	.!			!	!
		1	- 1	1	1	!	1	!	- 1
				'			'		
ER FUN	ICTION LABE	I TX RESI I REPORT	JLT GROUP	I DIAL I OPTION	<u>.</u>]				<u>`</u>
	I FAX I HEADER	I TX RESI I REPORT		IDIAL IOPTION LINES AND SE	<u>.</u>]	L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	il(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	(L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	(L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	(L(S) TO THE		N PANEL.	
	I FAX I HEADER	I TX RESI I REPORT			<u>.</u>]	(L(S) TO THE		N PANEL.	

Speed Dial

Registering

If you register numbers in Speed Dials, you can specify the fax number simply by pressing the [Speed Dial] key, and entering a two-digit Speed Dial number.

The following procedure describes how to register fax numbers in Speed Dials.

You can register the following items in a Speed Dial:

- Destination fax number (up to 100 numbers, up to 254 digits for each number)
- Destination name (up to 20 characters)
- A Telephone Directory search letter (A to Z)
- Label Insertion (whether to print the destination name on faxes sent to this number)

∰Important

We recommend that you print the Speed Dial list and keep it when you register or change a destination.


Limitation


☐ When a registered Speed Dial is being used for a standby Memory Transmission, the message " This Dial is in Use. Cannot Change." is shown and you cannot change the destination for this Ouick Dial.

Note

- \square You can specify codes 00 to 99.
- ☐ You can confirm the contents of Speed Dial numbers in the Speed Dial List. See p.54 "Printing Reports/Lists", Advanced Features.

Press the [User Tools] key.





Press ⊚ or ⊚ until " 2. Fax Features" is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.


Fax Features: 1.Program / Delete ◆▶

Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press ③ or ⑤ until " 3. Prog. Speed Dial " is displayed.

Program / Delete: 3.Prog. Speed Dial ◆▶

Press the [OK] key.




Display the number of the Speed Dial you want to register (00 to 99).

Enter the Speed Dial number with the number keys, or search using ③ or ⑤.



Note

- ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
- ☐ If a Speed Dial number has already been stored, the contents are displayed. Press ④ or ⑤ to select an unprogrammed number, then press the [OK] key.
- Enter a fax number with the number keys.




Ø Note

- ☐ If you make a mistake, press the **[Clear/Stop]** key and try again.
- □ If you press the **[Pause/Redial]** key, the last 10 fax numbers dialed are displayed. Press ③ or ⑤ to select the fax number you want to specify, and then press the **[OK]** key.
- Press the [OK] key.

The fax number is programmed.




Enter the Destination name.




Note

- ☐ If a destination name is already registered in the Speed Dial, the name is shown on the display. If you wish to change the destination name, press the [Clear/Stop] key, and then enter another name.
- Press the [OK] key.

The search letter is registered.



Press or to select "On" or "Off".



Note

- ☐ Label insertion allows the destination name that is programmed in Quick Dial or Speed Dial to be printed on the fax when it is received at the other end. See p.7 "Label Insertion", Advanced Features.
- Press the [OK] key.




If you want to store another Speed Dial number, go to step **G**.

Press the [User Tools] key to return to standby display.

Editing

The following procedure describes how to edit registered Speed Dial numbers.

Press the [User Tools] key.





Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆▶

Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press ③ or ⑤ until " 3. Prog. Speed Dial " is displayed.


Program / Delete: 3.Prog. Speed Dial ◆▶ 6 Press the [OK] key.

Enter No.to Program [∰∎∎] (Browse∢▶)

Display the number of the Speed Dial you want to edit (00 to 99).

Enter the Speed Dial number with the number keys, or search using ③ or ⑤.

- Press the [OK] key.
- Press the [Clear/Stop] key, and then reenter a fax number with the number keys.



- Note
- ☐ If you make a mistake, press the [Clear/Stop] key and try again.
- ☐ If you press the [Pause/Redial] key, the last 10 fax numbers dialed are displayed. Press ③ or ⑤ to select the fax number you want to specify, and then press the [OK] key.
- Press the [OK] key.


The fax number is programmed.

Press the [Clear/Stop] key, and then reenter the Destination name.




Press the [OK] key.

The search letter is registered.



3

Press @ or D to select "On" or "Off".



Note

- ☐ Label insertion allows the destination name that is programmed in Quick Dial or Speed Dial to be printed on the fax when it is received at the other end. See p.7 "Label Insertion", Advanced Features.
- Press the [OK] key.

Program / Delete: 3.Prog.Speed Dial ♦▶

If you want to edit another Speed Dial number, go to step **G**.

Press the [User Tools] key to return to standby display.


Deleting


The following procedure describes how to delete fax numbers in Speed Dials.

Limitation

☐ If a registered Speed Dial is being used for a standby Memory Transmission, the message "This Dial is in Use. Cannot Delete." is shown and you cannot delete the destination for this Speed Dial.

Press the [User Tools] key.






Press ③ or ⑤ until "2. Fax Features" is displayed.



Press the [OK] key.




Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press ③ or ⑤ until " 4. Del. Speed Dial " is displayed.

Program / Delete: 4.Del. Speed Dial ◆

Press the [OK] key.



Display the Speed Dial number you want to delete (00 to 99).


Enter the Speed Dial number with the number keys or search using ③ or ⑤.



The Speed Dial number and the fax number or name are displayed.

Press the [OK] key.

The programmed data (fax number and name) is deleted.



If you want to delete another name, go to step **6**.

Press the [User Tools] key to return to standby display.

Groups

If you regularly broadcast documents to the same set of destinations, you can combine these numbers into a group. Then just select the group and each number will be dialed in sequence automatically.

There are two ways of programming Groups:

Registering groups in Quick Dial keys

If you register a group in a Quick Dial key, you can specify that group by pressing a Quick Dial key. However, if you use Quick Dial keys to register groups, you will be able to register fewer Quick Dial keys.

Note

☐ You cannot register another function (Quick Dials) in a Quick Dial key already used for a group. Also, you cannot register groups in a Quick Dial key already used for another function.

Assigning the Group Functions to the Group key

To assign the Group Function to the Group key, you must first assign the Group function to a User Function key. To send a fax, press the Group key, and then enter the group number (1 to 5). To select a Group using a Group key, one more step is required than when using a Quick Dial key. However, multiple Groups (a maximum of five) can be stored in a Group key, thus leaving the Quick Dial keys to be used more effectively.

Registering

You can register the following items in a Group:

- Destination fax numbers
- Group name (up to 20 characters)


You can enter destination numbers using Quick Dial keys, Speed Dials, or the number keys.


- ☐ You can register up to 5 Groups.
- ☐ The maximum number of destinations you can register in a Group is 140.
- ☐ The combined maximum number of destinations you can register in all Groups is 149. This 149 can be composed of up to 30 Quick Dial numbers, 50 Speed Dial numbers and 69 numbers entered directly with the number keys.
- ☐ The number of destinations that can be registered with the number keys depends on how the machine is used. In theory you can register up to a combined maximum of 69 destinations with the number keys for all groups.
- ☐ If you register 69 destinations with the number keys, Memory Transmission using the number keys becomes unavailable, and only Immediate Transmission is available.
- ☐ If you register a Group with the number keys when a file is waiting to be transmitted, a message is shown. You sometimes cannot register any more destinations even when the number of specified destination is 68 or less.

- ☐ It is recommended that you print the Group Dial list and keep it when you register or change destinations. See p.54 "Printing Reports/Lists", Advanced Features.
- If you register the same destination in different Groups, it is only counted as one item.
- ☐ The table below shows how to count numbers.


Group1	Group2	Total Number of items
Quick Dial [01]	Quick Dial [01]	9
Quick Dial [03]		
Quick Dial [05]	Quick Dial [05]	
Speed Dial [02]	Speed Dial [02]	
Speed Dial [04]	Speed Dial [04]	
Speed Dial [06]		
	Speed Dial [09]	
Number keys 12345678	Number keys 12345678	
Number keys 87654321		

Press the [User Tools] key.






Press (a) or (b) until " 2. Fax Features " is displayed.



Press the [OK] key.




Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press ③ or ⑤ until " 5. Prog. Group Dial " is displayed.

Program / Delete: 5.Prog. Group Dial ◆

Press the [OK] key.



Display the number of the Group you want to register (1 to 5).

Enter the group number with the number keys, or search using ③ or ⑤.




Note

- ☐ If you make a mistake, press the **[Cancel]** key and try again.
- ☐ If a group has already been stored, the contents are displayed. Press ③ or ⑤ to select a group number that is not programmed, and then press the [OK] key.
- If a group is programmed, but no name is specified, the group number only is displayed on the lower line of the display.

Specify the destination using one of the following three methods:

Enter the fax number with the number keys.



Press a Quick Dial key.

Gp.D1:#1	Press	OK
aa @o1 ABC	COMPANY	

Press the **[Speed Dial]** key, and then enter a Speed Dial number.

Gp.D1:#1 Press OK **គេ**®OO London office

Press the [OK] key.

The destination is programmed.

Press the ③ or ⑤ to select " Add " or " Exit ".



Press the [OK] key.

If you selected "Exit", go to step **E**.

- Repeat step **1** to **1** for all the destinations you want to register in the Group.
- **E** Enter the Group name.



Note

- ☐ If the Group name is already registered, it is shown on the display. If you wish to change the Group name, press the [Clear/Stop] key, and then enter another name.
- Press the [OK] key to register the Group.

Press ③ or ⑤ to select "Yes" or "No" to be programmed in the Quick Dial key. Then press the [OK] key.

If you selected "No ", go to step **E**.

Press the Quick Dial key you want to register in the Group.

Press Quick Dial Key [@O3] Press the [OK] key.

Program / Delete: 5.Prog.Group Dial ◆▶

Press the [User Tools] key to return to standby display.


Editing

You can edit the group name or add destinations for programmed groups. To edit a destination:

- For destinations programmed in Quick Dial or Speed Dial, edit the contents of the programmed Quick Dial or Speed Dial.
- For destinations programmed with the number keys, delete the destination you want to edit from the group, and then program the new destination.

Editing a Group Name

Press the [User Tools] key.



Press (d) or (b) until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆▶

Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press ③ or ⑤ until " 5. Prog. Group Dial " is displayed.

Program / Delete: 5.Prog. Group Dial ◆

Press the [OK] key.

Enter No. / Press Key [Gp.D∎] (Browse∢▶)

Display the number of the group you want to edit (1 to 5).

Enter the group number with the number keys, or search using ③ or ⑤.

Press the [OK] key.


Change Dest.?: ♠/OK [Yes] No

Press @ or © to select "No".

Press the [OK] key.

3

Press the [Clear/Stop] key, and then enter the new name.



Note

- ☐ If you want to delete a character of the name, press the [Clear/Stop] key.
- ☐ If you press the [Cancel] key, the display will return to that shown for step **⑤**.
- Press the [OK] key.

The name is changed.

Press ③ or ⑤ to select "Yes" if the group was programmed in a Quick Dial, or select "No" if it was not.

Assign to Key? **♦**/OK [Yes] No

Press the [OK] key.

If you selected "No", go to step **1**.

Press Quick Dial Key [@05]

Note

- ☐ If you want to edit a programmed Quick Dial key, press the Quick Dial key, and then the [OK] key.
- Press the [OK] key.


Program / Delete: 5.Prog.Group Dial ◆

If you want to program another group name, go to step **6**.

Press the [User Tools] key to return to standby display.

Adding a Fax Number to a Group

Press the [User Tools] key.



Press (a) or (b) until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Confirm that "1. Program / Delete " is displayed.

- Press the [OK] key.
- Press @ or Description until 5. Prog. Group Dial is displayed.

Program / Delete: 5.Prog.Group Dial ◆

6 Press the [OK] key.

Enter No. / Press Key [Gp.D∎] (Browse∢▶) Display the number of the group to which you want to add a number (1 to 5).

Enter the group number with the number keys, or search using ③ or ⑤.

Press the [OK] key.

Change Dest.?: **♦**/OK [Yes] No

Press @ or > to select "Yes".

Change Dest.?: ♠/OK [Yes] No

Press the [OK] key

Note

- ☐ If you have finished adding destinations, select "Exit" and go to step **①**.
- Press @ or > to select "Add".

Press the [OK] key.



Specify the destination using one of the following three methods:

Enter the fax number with the number keys.



Press a Quick Dial key.

Gp.D1:#4 Press OK **ක**∭O1 ABC COMPANY

Press the **[Speed Dial]** key and enter a Speed Dial number.

Gp.D1:#4 Press OK **ភ**ែ®OO London office

- Note
- ☐ If you specify a Quick Dial or Speed Dial that is not programmed, "This key is Not Programmed" is displayed. Respecify the destination.
- Press the [OK] key.

The destination is added.

- To add another destination, repeat steps 10 to 10.
- If you have finished adding destinations, select "Exit".

Press the [OK] key.

Gp.D1[ABC] /OK [Europe1##########]

- ☐ If you want to change the group name, press the [Clear/Stop] key and enter the new name.

3

Press the [OK] key.

Assign to Key? **♦**/OK [Yes] No

Press ③ or ⑤ to select "Yes" if the group was programmed in a Quick Dial, or select "No" if it was not.

Assign to Key? **♦**/OK [Yes] No

Press the [OK] key.

If you selected "No", go to step 2.

Press Quick Dial Key [MO5]

- ☐ If you want to edit a programmed Quick Dial, press the Quick Dial key, and then the [OK] key.
- Press the [OK] key.

Program / Delete: 5.Prog.Group Dial ◆

If you want to add another destination to the group, go to step **6**.

Press the [User Tools] key to return to standby display.


Deleting

The following procedure describes how to delete a destination from a group.

 When you delete a destination from a group programmed in a Quick Dial or a Speed Dial, the contents of the Quick Dial or Speed Dial are not deleted.

To delete a destination from a group

1 Press the [User Tools] key.



Press (a) or (b) until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Confirm that "1. Program / Delete " is displayed.

Press the [OK] key.

Press ③ or ⑤ until " 5. Prog. Group Dial " is displayed.

Program / Delete: 5.Prog.Group Dial ◆


6 Press the [OK] key.

Enter No. / Press Key [Gp.D∎] (Browse∢) Display the group number for the destination you want to delete (1 to 5).


Enter the group number with the number keys, or search using ③ or ⑤.



Press the [OK] key.



Press @ or > to select "Yes".



Press the [OK] key.




Press @ or © to select "Delete".



Press the [OK] key.

Select Destination with **∢**

Press @ or > to display the destination you want to delete.



Press the [OK] key.



To delete another destination, repeat steps \mathbf{Q} to \mathbf{Q} .


If you are finished deleting destinations, press ⊚ or ♭ to select "Exit".




Press the [OK] key.



Press the [OK] key.




Press ③ or ⑤ to select "Yes" if the group was programmed in a Quick Dial, or select "No" if it was not.



Press the [OK] key.

If you selected "No", go to step **2**.





☐ If you want to edit a programmed Quick Dial key, press the Quick Dial key and then the **[OK]** key.

Press the [OK] key.


Program / Delete: 5.Prog.Group Dial ◆▶

If you want to delete another destination from the group, go to step **G**.

Press the [User Tools] key to return to standby display.

To delete an entire group

1 Press the [User Tools] key.



Press ③ or ⑤ until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features ◆

Press the [OK] key.

Fax Features: 1.Program / Delete ◆

Confirm that "1. Program / Delete " is displayed.

Press the [OK] key.

Press @ or © until " 6. Del. Group Dial " is displayed.

Program / Delete: 6.Del. Group Dial ◆

Press the [OK] key.

Enter No. / Press Key [Gp.D∎] (Browse**∢**▶)

Display the number of the group you want to delete (1 to 5).

Enter the group number with the number keys, or search using ③ or ⑤.

Press the [OK] key.

The entire Group is deleted.

Program / Delete: 6.Del. Group Dial **♦**

Press the [User Tools] key to return to standby display.

To change and delete Quick Dials programmed as groups:

To store an entire group under a different Quick Dial key, or to delete the group from the Quick Dial key altogether, perform the following procedure:

- ① Press the [User Tools] key.
- ② Press ③ or ⑤ until " 2. Fax Features " is displayed.
- ③ Press the [OK] key.
- ④ Press the [OK] key, and then press ⑤ or ⑤ to display "5. Prog. Group Dial".

- ⑤ Press the [OK] key.
- **⑥** Enter the group number (1 to 5).
- ⑦ Press the [OK] key.
- Press the [OK] key.
- If you want to change the Quick Dial key, press "Yes", and if you want to delete the Quick Dial key, press "No".
- ① Press the [OK] key. If you selected "No" in step ⑩, the Quick Dial key is deleted. Go to step ⑭.
- ② If you want to change the Quick Dial key, press the new Quick Dial key.
- ® Press the [OK] key. The Quick Dial key is changed.
- Press the [User Tools] key to return to standby display.


Entering Characters

This section describes how to enter characters.

Available Characters

- Letters: ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz
- Symbols: -_(space).,()/@&\$!'#★%+:;<=>?^[]`{|}~
- Numbers: 0123456789

Keys

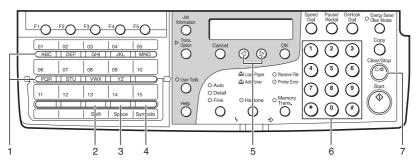

ZEWS040E

1. Quick Dial 01 to 09 or Quick Dial 16 to 24 (A to Z)

Press these keys to enter upper and lower case letters.

Every time you press the same Quick Dial key, one of the three letters printed on a Quick Dial key is displayed. For example, when you press Quick Dial 01, the letter displayed changes in the order $A \rightarrow B \rightarrow C \rightarrow A$ as you press the key. Press b to move the cursor and enter the next character.

2. [Shift] key (Quick Dial 13 or 28)

Use to switch between upper and lower case.

3. [Space] key (Quick Dial 14 or 29)

Press to enter a space.

4. [Symbols] key (Quick Dial 15 or 30)

Press to enter symbols.

5. ④ or **▷**

Use to move the cursor left or right and to select a symbol.

6. Number keys

Use to enter numbers.

7. [Clear/Stop] key

Deletes the character at the cursor position. If the cursor is placed to the right of the last character at the right end of a line, that character will be deleted.

How to Enter Characters

The following procedure describes how to enter characters.

𝒯 Note

- When you enter a character, it is shown at the position of the cursor. If there is a character at the cursor position, the entered character is shown before the character.
- **1** Enter letters, symbols or numbers. Characters are entered and the cur-

Characters are entered and the cursor moves.

- For letters, press the Quick Dial keys (01 to 09 or 16 to 24). When the desired letter is displayed, press ⊚.
- For symbols, press the [Symbols] key and ③ or ⑤ to select the symbol, and then press the [OK] key.
- For numbers, press the number key.

Note

- ☐ When you make a mistake, press the [Clear/Stop] key.
- ☐ When you want to insert a character, move the cursor to the character right of the position you want to enter the character. Now the inserted character is shown left of the cursor position.
- Press the [OK] key.

Wild Cards

When you register other parties' Own Name or Own Fax Numbers for multiple destinations, you can register a sequence of characters common to these identifications as a wild card instead of registering every identification.

If a destination has an Own Name or Own Fax Number containing a wild card, the machine determines that the destination matches the registered destination.

Not using a wild card

Destination to be registered (Own Name)	Number of registered identifications
NEW YORK BRANCH	3
HONG KONG BRANCH SYDNEY BRANCH	

❖ Using a wild card

	Number of registered identifications
BRANCH	1

Note

- \square You can register up to 30 wild cards.
- Compare identifications by neglecting spaces.
- ☐ You can use wild cards for the following functions:
 - Memory Lock See p.72 "Memory Lock", Advanced Features.
 - Forwarding See p.76 "Forwarding", Advanced Features.

4. Troubleshooting

Loading Paper in the Main Paper Tray

If there is no paper in the main paper tray, the **i** indicator on the control panel lights.


Use the following procedure to load the paper.

#Important

- ☐ When loading paper, be careful not to pinch your fingers inside the machine.
- ☐ Before loading paper, make sure that the machine is not outputting a copy or received document.


Note

- ☐ Regarding paper types and sizes that can be used, see p.128 "Paper", Advanced Features.
- ☐ If you want to change the paper size, see p.61 "Changing the Paper Size Setting", *Advanced Features*.
- Make sure that the main paper tray is not being used.
- Pull out the main paper tray until it stops.
- Push the metal plate down, and then square the paper and load it in the tray.



Important

Do not stack paper over the limit mark.



- ☐ If paper is left in the main paper tray and you add paper, a misfeed might occur.
- **𝒯** Note
- ☐ Shuffle the paper before setting it in the tray.
- Push the main paper tray in until it stops.

4

Adjusting Volume

You can change the volume of the following sounds the machine makes.

On Hook

Sounds when you press the **[On Hook Dial]** key.

Transmission

Sounds when the machine send a message.

Reception

Sounds when the machine receives a message.

Dialing

After pressing the **[Start]** key, this sound is made until the line connects to the destination.


❖ Key Tone

Sounds when keys on the Control panel are pressed.

Alarm

The sound to signal something going amiss.

Press the [User Tools] key.



Press (d) or (b) until " 2. Fax Features " is displayed.

User Tools: 2.Fax Features **♦**

Press the [OK] key.



Confirm that "1. Program / Delete " is displayed.

Press @ or © until " 3. Setup " is displayed.


Press the [OK] key.

Confirm that " 1. Monitor Volume " is displayed.

Setup: 1.Monitor Volume ◆

Press the [OK] key.

Press ③ or ⑤ to select the item you want to adjust, and then press the [OK] key.




Press @ or D to adjust the volume.



Press the [OK] key.

The volume is adjusted.



If you want to adjust another item, repeat steps \mathbf{I} to \mathbf{I} .

Press the [User Tools] key to return to standby display.

Clearing Original Jams


If an original is jammed, the **\(\)** indicator on the Control Panel blinks and "Clear Misfed Original (S) " is displayed.

Perform the following procedure to clear the jammed original.

1 Open the ADF cover.



While pushing the release button, lift the ADF unit.



3 Remove the original.



Close the ADF unit and ADF cover making sure it clicks firmly into place.

Δ

Clearing a Copy, Fax, or Print Jam

↑ CAUTION:

- The fusing section of this machine might be very hot. Caution should be taken when removing misfed paper.
- The inside of the machine could be very hot. Do not touch the parts with a label indicating "hot surface". Otherwise an injury might occur.

If a copy, fax, or printed paper is jammed, the **\(\)** indicator on the Control Panel blinks and "Clear Misfed Paper" is displayed.

Perform the following procedure to clear the jammed paper.

∰Important


☐ The fusing unit and surrounding area inside the machine becomes hot during printing. To avoid injury when removing paper jams, do not touch any parts other than those specified in this manual.

Note


☐ If paper jams occur in the optional paper tray unit, see p.102 "Clearing a Copy, Fax or Print Jam", Advanced Features.

Inside the Machine


1 Open the right cover.



2 Open the blue cover.




Pull out the jammed paper.



When paper is caught in the lower unit

• Pull out the jammed paper.



2 Close the right cover making sure it clicks firmly into place.

Error Messages

The following messages may appear while you are operating or programming the machine.

Message	Problem/Solution
No Files Exist	No polling reception operations have been programmed. There are no documents in memory waiting for transmission.
	Incorrect file number. Check the file number and try again.
Cannot Combine : (currently selected function)	Appears when you attempt to select a function that cannot be used in combination with another currently selected function.
This Key is in Use as a Group Dial	This Quick Dial Key has a Group stored in it.
This Key is in Use as a Program	This Quick Dial Key has a Keystroke Program stored in it.
This Key is in Use as a Quick Dial	This Quick Dial Key has a Quick Dial stored in it.
This Key is Not Programmed	Either: This Quick Dial Key does not contain a number. This Quick Dial Key does not contain a Keystroke Program.
This Speed Dial No. is Not Programmed	This Speed Dial number does not contain a number.
This Dest. is Already Selected	Either:This number is already included in this Group.The same destination was specified more than once.
Insert Pause "-" After Area Code	You must add a pause after your area code when you input your fax terminal's own telephone number.
Replace Toner	The toner cassette is empty. Install a new cassette.
Clear Misfed Original(S)	A document is jammed in the feeder.
Clear Misfed Paper	Paper is jammed in the printer.
Close Front/Right Cover	A cover is not closed properly. Check that all covers are closed.
Machine is in Use. Please Wait	Machine cannot print a list/file, because the plotter is not ready.
Call Service	Machine is out of order. Contact your service representative.
Check Paper Size. Press OK to Correct.	The size of the installed paper does not match the currently selected paper size. Press the [OK] key, and then set the paper size or install the appropriate paper.
This Dial is in Use. Cannot Delete. This Dial is in Use. Cannot Change.	This Quick Dial is being used (such as for a Send Later Transmission).

Message	Problem/Solution
Some Page(S) are Blank	An almost entirely blank document was scanned. Check your document.
Reset Toner Correctly	The toner cassette is not set correctly.
Toner is Almost Empty	The toner cassette is nearly empty.
Copy Mode Locked	Copy mode is disabled. Enable it with the User Parameters.
Change ADF Maintenance Kit	Replace the ADF Maintenance Kit.
Scanner Needs Cleaning	Wipe the exposure glass and the white strip.

When the Receive File Indicator is Lit

If the **Receive File** indicator is **lit**, a message has been received but could not be printed for some reason. The message was stored in memory (Substitute Reception). When you solve the problem, the message will be automatically printed out. The table below lists some problems that could have caused Substitute Reception to take place and their solutions.

Why Substitute Reception Occurred	Indication/Status	Solution
Paper has run out	≟ is lit red.	Load paper.
		See p.71 "Loading Paper in the Main Paper Tray".
Toner is empty	᠘ is lit red.	Replace the toner cassette.
		See Cp.117 "Replacing the Toner Cassette", <i>Advanced Features</i> .
		NoteEven if there is no toner left, you can still send fax messages.
Paper is jammed	ነ is lit red.	Remove the jammed paper.
		p.75 "Clearing a Copy, Fax, or Print Jam"
Cover is open	\ is lit red.	Close the cover.

Solving Problems

This table lists some common problems and their solutions.

Problem	Required Action
Printed or sent image contains spots.	The Document Feeder (ADF) or scanner is dirty. Clean them. Make sure that ink or correction fluid is dry before setting the original.
	Reference See p.112 "Cleaning the Scanner", Advanced Features.
Received image is too light.	Request the sender to increase the image density.
	When using moist, rough or processed paper, the printed image may be hard to see. Only use recommended paper.
	₽ Reference
	See p.127 "Originals", Advanced Features.
	When 🕹 appears on the display, toner is beginning to run out. Replace the toner cassette soon.
	Reference See p.117 "Replacing the Toner Cassette", Advanced Features.
Message appears blank at the other	The original was set upside down. Set it properly.
end.	₽ Reference
	See p.25 "Setting Originals".
You want to cancel a Memory Transmission.	If the original is being stored, press the [Clear/Stop] key.
	₽ Reference
	See p.29 "Canceling a Memory Transmission".
	If the original is being sent, use "Cancel TX/RX" in the Job Information menu.
	Reference See p.11 "Canceling Transmission or Reception", Advanced Features.
You want to cancel an Immediate	Press the [Clear/Stop] key.
Transmission.	Reference See p.33 "Canceling an Immediate Transmission".

Problem	Required Action
You cannot add any destinations to a Group, even though the maximum number of destinations has not been reached.	69 destinations have been programmed with the number keys. Program more numbers with Quick Dials or Speed Dials. Reference See p.58 "Groups"

INDEX

A	E
Add Toner indicator, 17 ADF Cover, 15 Adjusting Volume Alarm, 72 Dialing, 72 Key Tone, 72 On Hook, 72 Reception, 72 Transmission, 72 Advanced Features (on CD-ROM), 12 Auto Receive, 41 Auto Select, 41	Editing Fax Header, 45 Groups, 61 Own Fax Number, 45 Own Name, 45 Quick Dial, 49 Speed Dial, 55 Energy Saver/Clear Modes key, 18 Entering Characters, 68 Error Messages, 76 External Telephone Connector, 16
В	F
Basic Features (this manual), 12 Bypass Tray (Option), 15	Fax Header, 43 Editing, 45 Registering, 43 Faxing, 23
Cancel key, 17 Characters Available Characters, 68 Entering, 68	Fine, 34 Front Cover, 15 Front View, 15 G
Keys, 68 Clear Modes key, 18 Clear/Stop key, 18 Components, 15 Control Panel, 15, 17 Copy key, 18 CSI→Own Fax Number, 43	G3 Line Connector, 16 Getting Started, 15 Group Name, 61 Groups, 39,58 Deleting, 64 Dialing, 39 Editing, 61 Registering, 58
Deleting Groups, 64 Quick Dial, 50 Speed Dial, 56	Halftone, 35 Halftone key, 18
Detail, 34 Dialing, 36 Entering Numbers Directly, 36 Using Groups, 39 Using Quick Dials, 37 Using Speed Dials, 38	Help key, 18 How to Read this Manual, 11 Immediate Transmission, 23, 31
Dial label, 51 Display, 20 Document Feeder (ADF), 15, 25	Canceling, 33 Job Information key, 17
	job intormation key, 17

L	R
LCD display, 17 Loading Paper, 71 Load Paper Indicator, 17 Lower Right Cover, 15 Low-power Mode, 8	Receive File Indicator, 17,78 Reception Mode Selecting, 41 Reception Modes Auto Receive, 41
М	Auto Select,41 Manual Receive,41
Main Paper Tray, 71 Manual Receive, 41 Manuals for This Machine, 12 Memory Trans. key, 18 Memory Transmission, 23, 27 Canceling, 29	Registering Fax Header, 43 Groups, 58 Own Fax Number, 43 Own Name, 43 Quick Dial, 47 Speed Dial, 53 Release Button, 15
	Resolution, 34 Resolution key, 18
NOTICE, 1 Number keys, 18 <i>Dialing</i> , 36	Right Cover, 15 RTI→Own Name, 43
O	<u>s</u>
OK key, 17 On Hook Dial key, 18 Original guide, 16 Original Output Tray, 15 Original Tray, 16 Original Type, 34, 35 Output Tray, 15 Output tray guide, 16 Own Fax Number, 43 Editing, 45 Registering, 43 Own Name, 43 Editing, 45 Registering, 43 P Paper Tray Unit, 15 Pause, 37 Pause/Redial key, 17	Scan Settings, 34 Setting Originals, 25 Side View, 16 Solving Problems, 79 Speed Dial, 53, 55, 56 Deleting, 56 Dialing, 38 Editing, 55 Registering, 53 Speed Dial key, 17 Standard, 34 Starting the Machine, 19 Start key, 18 Status Indicators Alarm, 18 Communicating, 18 Substitute Reception, 78
Power Switch, 16	Tone, 37 Transmission Modes, 23 Trans. Option key, 17
Quick Dial, 47 Deleting, 50 Dialing, 37 Dial label, 51 Editing, 49	Troubleshooting, 71 Error Messages, 76 TTI→Fax Header, 43 U User Function keys, 17
Registering, 47 Quick Dial keys, 18	User Tools key, 18

V

Ventilation hole, 16 Volume, 72

W

Wild Cards, 69

MEMO





Declaration of Conformity

Notice to Users in EEA Countries

This product complies with the essential requirements and provisions of Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity.

Notice to Users Accessing Analog PSTN in EEA Countries

This product is designed to be able to access analog PSTN in all EEA countries. Local PSTN compatibility is dependent on software switch settings. Please contact your service representative if relocating this product to another country. In the event of problems, please contact your service representative in the first instance.

The CE Declaration of Conformity is available by accessing the URL:

http://www.ricoh.co.jp/fax/ce doc/ and selecting the product applicable.

In accordance with IEC 60417, this machine uses the following symbols for the main power switch:

- I means POWER ON.
- O means POWER OFF.



