




# PostScript 3 Supplement

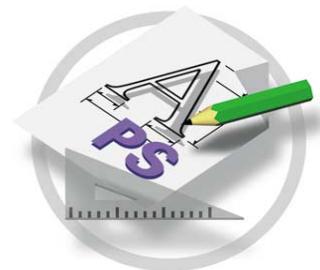

- 
- 1** Windows Configuration
  - 2** Mac OS Configuration
  - 3** Using PostScript 3
  - 4** Printer Utility for Mac

Read this manual carefully before you use this product and keep it handy for future reference. For safe and correct use, please be sure to read the Safety Information in the "General Settings Guide" before using the machine.

## **Introduction**

This manual describes detailed instructions on the operation and notes about the use of this machine. To get maximum versatility from this machine, all operators are requested to read this manual carefully and follow the instructions. Please keep this manual in a handy place near the machine.

## **Important**

Contents of this manual are subject to change without prior notice. In no event will the company be liable for direct, indirect, special, incidental, or consequential damages as a result of handling or operating the machine.

## **Trademarks**

Microsoft®, Windows® and Windows NT® are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Adobe® and PostScript® are registered trademarks of Adobe Systems Incorporated.

Macintosh, Mac OS, Apple, AppleTalk, EtherTalk, LaserWriter are registered trademarks of Apple Computer, Inc.

Other product names used herein are for identification purposes only and might be trademarks of their respective companies. We disclaim any and all rights in those marks.

The proper names of the Windows operating systems are as follows:

- The product name of Windows® 95 is Microsoft® Windows 95.
- The product name of Windows® 98 is Microsoft® Windows 98.
- The product name of Windows® Me is Microsoft® Windows Millennium Edition (Windows Me).
- The product names of Windows® 2000 are as follows:  
Microsoft® Windows® 2000 Advanced Server  
Microsoft® Windows® 2000 Server  
Microsoft® Windows® 2000 Professional
- The product names of Windows® XP are as follows:  
Microsoft® Windows® XP Professional  
Microsoft® Windows® XP Home Edition
- The product names of Windows Server™ 2003 are as follows:  
Microsoft® Windows Server™ 2003 Standard Edition  
Microsoft® Windows Server™ 2003 Enterprise Edition
- The product names of Windows NT® 4.0 are as follows:  
Microsoft® Windows NT® Server 4.0
- Microsoft® Windows NT® Workstation 4.0

## **Notes:**

Some illustrations in this manual might be slightly different from the machine.

Certain options might not be available in some countries. For details, please contact your local dealer.

# TABLE OF CONTENTS

## 1. Windows Configuration

---

<b>Using the SmartDeviceMonitor for Client Port.....</b>	<b>1</b>
Installing SmartDeviceMonitor for Client .....	1
Installing the PostScript 3 Printer Driver (Windows 95/98/Me - TCP/IP) .....	2
Installing the PostScript 3 Printer Driver (Windows 95/98/Me - NetBEUI) .....	3
Installing the PostScript 3 Printer Driver (Windows 95/98/Me - IPP) .....	5
Installing the PostScript 3 Printer Driver (Windows 2000 - TCP/IP) .....	7
Installing the PostScript 3 Printer Driver (Windows 2000 - NetBEUI) .....	8
Installing the PostScript 3 Printer Driver (Windows 2000 - IPP) .....	9
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003 - TCP/IP) ..	11
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003 - IPP)...	12
Installing the PostScript 3 Printer Driver (Windows NT 4.0 - TCP/IP) .....	14
Installing the PostScript 3 Printer Driver (Windows NT 4.0 - NetBEUI) .....	15
Installing the PostScript 3 Printer Driver (Windows NT 4.0 - IPP).....	16
Changing the Port Settings for SmartDeviceMonitor for Client .....	18
<b>Using the Standard TCP/IP Port .....</b>	<b>20</b>
Installing the PostScript 3 Printer Driver (Windows 2000) .....	20
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003) .....	21
<b>Using the LPR Port .....</b>	<b>23</b>
Installing the PostScript 3 Printer Driver (Windows 2000) .....	23
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003) .....	24
Installing the PostScript 3 Printer Driver (Windows NT 4.0).....	25
<b>Using as the Windows Network Printer .....</b>	<b>26</b>
Installing the PostScript 3 Printer Driver (Windows 95/98/Me) .....	26
Installing the PostScript 3 Printer Driver (Windows 2000) .....	27
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003) .....	28
Installing the PostScript 3 Printer Driver (Windows NT 4.0).....	29
<b>Using as the NetWare Print Server/Remote Printer.....</b>	<b>30</b>
When using the PostScript 3 Printer Driver.....	30
<b>Installing the Printer Driver Using USB .....</b>	<b>31</b>
Windows 98 SE/Me - USB .....	31
Windows 2000 - USB .....	33
Windows XP, Windows Server 2003 - USB .....	34
Troubleshooting USB .....	35
<b>Printing with Parallel Connection.....</b>	<b>36</b>
Installing the PostScript 3 Printer Driver (Windows 95/98/Me) .....	36
Installing the PostScript 3 Printer Driver (Windows 2000) .....	37
Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003) .....	38
Installing the PostScript 3 Printer Driver (Windows NT 4.0).....	39
<b>Installing the Printer Driver Using IEEE 1394 (SCSI print).....</b>	<b>40</b>
Windows 2000.....	40
Windows XP, Windows Server 2003.....	42
<b>Printing with Bluetooth™ Connection .....</b>	<b>44</b>
Supported Profiles.....	44
Printing with Bluetooth™ Connection.....	44
<b>If a Message Appears during Installation .....</b>	<b>47</b>
<b>Making Option Settings for the Printer .....</b>	<b>48</b>

<b>Setting Up the Printer Driver.....</b>	<b>49</b>
Windows 95/98/Me - Accessing the Printer Properties .....	49
Windows 2000 - Accessing the Printer Properties .....	50
Windows XP, Windows Server 2003 - Accessing the Printer Properties .....	52
Windows NT 4.0 - Accessing the Printer Properties .....	54

## **2. Mac OS Configuration**

---

<b>Mac OS.....</b>	<b>57</b>
Installing the PostScript 3 Printer Driver and PPD File .....	57
Setting Up PPD Files .....	58
Creating a Desktop Printer Icon .....	59
Setting Up Options .....	59
Installing the ColorSync Profiles .....	60
Installing Adobe Type Manager .....	60
Installing Screen fonts .....	61
Using USB Interface.....	62
Changing to EtherTalk .....	63
<b>Mac OS X .....</b>	<b>64</b>
Installing the PPD Files .....	64
Setting Up the PPD File .....	64
Setting Up Options .....	65
Using USB Interface.....	65
Using Rendezvous .....	66
Changing to EtherTalk .....	66
<b>Configuring the Printer.....</b>	<b>67</b>

### **3. Using PostScript 3**

---

<b>Setting Up Options .....</b>	<b>69</b>
<b>Printing a Document.....</b>	<b>70</b>
Job Type .....	70
User Code .....	87
Paper Selection.....	88
Paper Size.....	88
Fit to Paper.....	89
Input Slot.....	89
Resolution .....	90
Print Mode (Toner Saving ) .....	90
Duplex Printing.....	91
Gradation .....	92
Collate .....	93
Paper Type.....	94
Destination Tray .....	94
Staple .....	95
Punch .....	95
Z-fold .....	96
Watermark.....	96
Watermark Text.....	96
Watermark Font .....	97
Watermark Size.....	97
Watermark Angle .....	98
Watermark Style.....	98
Color Mode.....	99
Color Setting .....	100
Color Profile .....	101
Black Over Print .....	102
Gray Reproduction .....	102
Dithering.....	103
CMYK Simulation Profile .....	104
Image Smoothing .....	104
Color Control .....	105
Separate into CMYK .....	106

## **4. Printer Utility for Mac**

---

<b>Installing Printer Utility for Mac .....</b>	<b>107</b>
<b>Starting Printer Utility for Mac .....</b>	<b>108</b>
<b>Printer Utility for Mac Functions .....</b>	<b>109</b>
Downloading PS Fonts.....	110
Displaying Printer's Fonts.....	111
Deleting Fonts .....	111
Initializing the Printer Disk.....	112
Page Setup .....	112
Printing Font Catalog .....	112
Printing Font Sample.....	113
Renaming the Printer .....	113
Restarting the Printer .....	114
Downloading PostScript Files .....	114
Selecting the Zone .....	115
Displaying the Printer Status.....	115
Launching the Dialogue Console .....	116
<b>INDEX.....</b>	<b>117</b>

# 1. Windows Configuration

## Using the SmartDeviceMonitor for Client Port

### Installing SmartDeviceMonitor for Client

#### Important

- To install SmartDeviceMonitor for Client under Windows 2000/XP Professional, Windows Server 2003, and Windows NT 4.0, you must have an account that has Manage Printers permission. Log on as an Administrator.
- Install SmartDeviceMonitor for Client before installing the printer driver when using the SmartDeviceMonitor for Client port.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

**4** Click [SmartDeviceMonitor for Client/Admin].

**5** The software license agreement appears in the [License Agreement] dialog box. After reading through its contents, click [I accept the agreement], and then click [Next >]

**6** The SmartDeviceMonitor for Client installer starts.

**7** Click the [SmartDeviceMonitor for Client] checkbox, and then click [Next >].

The SmartDeviceMonitor for Client installer starts.

**8** Follow the instructions on the display to install SmartDeviceMonitor for Client.

**9** Click [Finish].

If you are required to restart the computer after installing SmartDeviceMonitor for Client, restart the computer.

#### Note

- To stop installation of the selected software, click [Cancel] before installation is complete. Restart the computer and reinstall other programs or printer drivers.

## Installing the PostScript 3 Printer Driver (Windows 95/98/Me - TCP/IP)

1

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 **Note**

The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Local Printer], and then click [Next].

A dialog box for selecting the printer manufacturer and model name appears.

**7** Select the name of the machine whose driver you want to install, and then click [Next].

**8** In the [Available ports:] box, click [Printer Port], and then click [Next].

**9** Change the printer name if you want, and then click [Next].

Select the [Yes] check box to configure the printer as default.

**10** Specify whether or not to print a test page, and then click [Finish].

**11** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**12** Click the icon of the printer you want to use. On the [File] menu, click [Properties].

**13** On the [Details] tab, click [Add Port...].

**14** Click [SmartDeviceMonitor] in the [Other] list, and then click [OK].

**15** Click [TCP/IP], and then click [Search].

A list of printers using TCP/IP appears.

**16 Select the printer you want to use, and then click [OK].**

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [**Specify Address**], and then enter the IP address or host name of the machine.

You cannot add an IP address partially similar to the one already used. For example, if "192.168.0.2" is in use, "192.168.0.2xx" cannot be used. Similarly, if "192.168.0.20" is in use, "192.168.0.2" cannot be used.

**17 Click [OK].****18 Check that the selected port is highlighted in [**Print to the following port**], and then click [OK].****19 Restart the computer to complete installation.** **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

**Installing the PostScript 3 Printer Driver (Windows 95/98/Me - NetBEUI)****1 Quit all applications currently running.****2 Insert the CD-ROM into the CD-ROM drive.**

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3 Select an interface language, and then click [OK].**

The default interface language is English.

 **Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4 Click [**PostScript 3 Printer Driver**].**

Add Printer Wizard starts.

**5 Click [**Next**].****6 Click [**Local Printer**], and then click [**Next**].**

A dialog box for selecting the printer manufacturer and model name appears.

**7 Select the name of the machine whose driver you want to install, and then click [**Next**].****8 In the [**Available ports:**] box, click [**Printer Port**], and then click [**Next**].**

9 Change the printer name if you want, and then click [Next].

Select the [Yes] check box to configure the printer as default.

10 Specify whether or not to print a test page, and then click [Finish].

11 On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

12 Click the icon of the printer you want to use. On the [File] menu, click [Properties].

13 On the [Details] tab, click [Add Port...].

14 Click [Other] in the [SmartDeviceMonitor] list, and then click [OK].

15 Click [NetBEUI], and then click [Search].

A list of printers using [NetBEUI] appears.

16 Click the machine you want to use, and then click [OK].

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [Specify Address], and then enter the NetBEUI address. The NetBEUI address can be checked with the configuration page. For information about printing a configuration page, see p.1 " ". The NetBEUI address appears in the format of "\\\RNxxxx\xxx" on the configuration page. Enter the machine's network path in the format of "%Computer name\Share name". Use "\\" instead of "%" at the beginning.

You cannot print using printers beyond routers.

17 Click [OK].

18 Check that the selected port is highlighted in [Print to the following port], and then click [OK].

19 Restart the computer to complete installation.

 Note

- A User Code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows 95/98/Me - IPP)

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 **Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Local Printer], and then click [Next].

A dialog box for selecting the printer manufacturer and model name appears.

**7** Select the name of the machine whose driver you want to install, and then click [Next].

**8** In the [Available ports:] box, click [Printer Port], and then click [Next].

**9** Change the printer name if you want, and then click [Next].

Select the [Yes] check box to configure the printer as default.

**10** Specify whether or not to print a test page, and then click [Finish].

**11** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**12** Click the icon of the printer you want to use. On the [File] menu, click [Properties].

**13** On the [Details] tab, click [Add Port...].

**14** Click [SmartDeviceMonitor] in the [Other] list, and then click [OK].

**15** Click [IPP].

- 16** In the [Printer URL] box, enter "http://(printer's address)/printer" as the printer's address.

If the server authentication is issued, to enable SSL (a protocol for encrypted communication), enter "https://(printer's address)/printer" (Internet Explorer 5.01, or a higher version must be installed).

(example IP address: 192.168.15.16)

**http://192.168.15.16/printer**

**https://192.168.15.16/printer**

You can enter "http://printer's address/ipp" as the printer's address.

- 17** Enter a name for identifying the printer in [IPP Port Name]. Use a name different from the one of any existing port.

If a name is not specified here, the address entered in the [Printer URL] box becomes the IPP port name.

- 18** Click [Detailed Settings] to configure proxy server, IPP user name, and other settings. Make these settings, and then click [OK].

You can enter "http://printer's address/ipp" as the printer's address.

- 19** Click [OK].

- 20** Check that the selected port is highlighted in [Print to the following port], and then click [OK].

- 21** Restart the computer to complete installation.

 **Note**

A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows 2000 - TCP/IP)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next >].

**7** Click [Create a new port: ].

**8** Click [SmartDeviceMonitor], and then click [Next >].

**9** Click [TCP/IP], and then click [Search].

A list of printers using TCP/IP appears.

**10** Select the printer you want to use, and then click [OK].

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [Specify Address], and then enter the IP address or host name of the machine.

**11** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**12** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**13** Click [Next >].

**14** Specify whether or not to print a test page, and then click [Next >].

**15** Click [Finish].

The printer driver installation starts.

 Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows 2000 - NetBEUI)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next >].

**7** Click [Create a new port: ].

**8** Click [SmartDeviceMonitor], and then click [Next >].

**9** Click [NetBEUI], and then click [Search].

A list of printers using NetBEUI appears.

**10** Select the printer you want to use, and then click [OK].

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [Specify Address], and then enter the NetBEUI address. The NetBEUI address can be checked with the configuration page. For information about printing a configuration page, see p.1 " ". The NetBEUI address appears in the format of "\RNPxxxx\xxx" on the configuration page. Enter the machine's network path in the format of "%Computer name\Share name". Use "%" instead of "\\" at the beginning.

You cannot print using printers beyond routers.

**11** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**12** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**13** Click [Next >].

**14** Specify whether or not to print a test page, and then click [Next>].

**15** Click [Finish].

The printer driver installation starts.

 **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

1

---

## Installing the PostScript 3 Printer Driver (Windows 2000 - IPP)

---

 **Important**

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 **Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next>].

**7** Click [Create a new port: ].

**8** Click [SmartDeviceMonitor], and then click [Next >].

**9** Click [IPP].

- 10 In the [Printer URL] box, enter "http://(printer's address)/printer" as the printer's address.

If the server authentication is issued, to enable SSL (a protocol for encrypted communication), enter "https://(printer's address)/printer" (Internet Explorer 5.01, or a higher version must be installed).

(example IP address: 192.168.15.16)

**http://192.168.15.16/printer**

**https://192.168.15.16/printer**

You can enter "http://printer's address/ipp" as the printer's address.

- 11 Enter a name for identifying the printer in [IPP Port Name]. Use a name different from the name of any existing port.

If a name is not specified here, the address entered in the [Printer URL] box becomes the IPP port name.

- 12 Click [Detailed Settings] to configure proxy server, the IPP user name and other settings. Specify the necessary settings, and then click [OK].

For information about the settings, see SmartDeviceMonitor for Client Help.

- 13 Click [OK].

- 14 Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

- 15 Change the printer name if you want, and then click [Next >].

- 16 Click [Next >].

- 17 Specify whether or not to print a test page, and then click [Next >].

- 18 Click [Finish].

The printer driver installation starts.

 **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003 - TCP/IP)

1

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [**PostScript 3 Printer Driver**].

Add Printer Wizard starts.

**5** Click [**Next >**].

**6** Click [**Local printer**], and then click [**Next >**].

**7** Click [**Create a new port:**].

**8** Click [**SmartDeviceMonitor**], and then click [**Next >**].

**9** Click [**TCP/IP**], and then click [**Search**].

A list of printers using [**TCP/IP**] appears.

**10** Select the printer you want to use, and then click [**OK**].

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [**Specify Address**], and then enter the IP address or host name of the machine.

**11** Check that the name of the machine whose driver you want to install is selected, and then click [**Next >**].

**12** Change the printer name if you want, and then click [**Next >**].

Select the [**Yes**] check box to configure the printer as default.

**13** Click [**Next >**].

**14** Specify whether or not to print a test page, and then click [Next>].

**15** Click [Finish].

The printer driver installation starts.



**Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

---

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003 - IPP)

---



- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.



**Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next>].

**7** Click [Create a new port: ].

**8** Click [SmartDeviceMonitor], and then click [Next >].

**9** Click [IPP].

- 10** In the [Printer URL] box, enter “http://(printer's address)/printer” as the printer's address.

If the server authentication is issued, to enable SSL (a protocol for encrypted communication), enter “https://(printer's address)/printer” (Internet Explorer 5.01, or a higher version must be installed).

(example IP address: 192.168.15.16)

**http://192.168.15.16/printer**

**https://192.168.15.16/printer**

You can enter "http://printer's address/ipp" as the printer's address.

- 11** Enter a name for identifying the printer in [IPP Port Name]. Use a name different from the one of any existing port.

If a name is not specified here, the address entered in the [Printer URL] box becomes the IPP port name.

- 12** Click [Detailed Settings] to make necessary settings.

For information about the settings, see SmartDeviceMonitor for Client Help.

- 13** Click [OK].

- 14** Check that the name of the printer driver you want to install is selected, and then click [Next >].

- 15** Change the name of the printer if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

- 16** Click [Next >].

- 17** Specify whether or not to print a test page, and then click [Next >].

- 18** Click [Finish].

The printer driver installation starts.

 **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows NT 4.0 - TCP/IP)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

#### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Add Port:].

**7** Click [SmartDeviceMonitor], and then click [New Port...].

**8** Click [TCP/IP], and then click [Search].

A list of printers using [TCP/IP] appears.

**9** Select the printer you want to use, and then click [OK].

Only printers that respond to a broadcast from the computer appear. To use a machine not listed here, click [Specify Address], and then enter the IP address or host name of the machine.

**10** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**11** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**12** Specify whether or not to print a test page, and then click [Finish].

The printer driver installation starts.

**13** Restart the computer to complete installation.

#### Note

- A user code can be set after the printer driver installation . For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows NT 4.0 - NetBEUI)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Add Port:].

**7** Click [SmartDeviceMonitor], and then click [New Port...].

**8** Click [NetBEUI], and then click [Search].

A list of printers using NetBEUI appears.

**9** Select the printer you want to use, and then click [OK].

Only printers that respond to a broadcast from the computer are displayed. To use a machine not listed here, click [Specify Address], and then enter the NetBEUI address. The NetBEUI address can be checked with the configuration page. For information about printing a configuration page, see p.1 " ". The NetBEUI address appears in the format of "\RNPxxxx\xxx" on the configuration page. Enter the machine's network path in the format of "%Computer name\Share name". Use "%%" instead of "\\\" at the beginning.

You cannot print using printers beyond routers.

**10** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**11** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**12** Specify whether or not to print a test page, and then click [Finish].

The printer driver installation starts.

**13** Restart the computer to complete installation.

 **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

---

## Installing the PostScript 3 Printer Driver (Windows NT 4.0 - IPP)

---

 **Important**

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 **Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Add Port:].

**7** Click [SmartDeviceMonitor], and then click [New Port...].

**8** Click [IPP].

- 9** In the [Printer URL] box, enter “`http://(printer's address)/printer`” as the printer's address.

If the server authentication is issued, to enable SSL (a protocol for encrypted communication), enter “`https://(printer's address)/printer`” (Internet Explorer 5.01, or a higher version must be installed).

(example IP address: 192.168.15.16)

`http://192.168.15.16/printer`

`https://192.168.15.16/printer`

You can enter “`http://printer's address/ipp`” as the printer's address.

- 10** Enter a name for identifying the printer in [**IPP Port Name**]. Use a name different from the one of any existing port.

If a name is not specified here, the address entered in the [Printer URL] box becomes the IPP port name.

- 11** Click [**Detailed Settings**] to make necessary settings.

For information about the settings, see SmartDeviceMonitor for Client Help.

- 12** Click [**OK**].

- 13** Check that the name of the machine whose driver you want to install is selected, and then click [**Next >**].

- 14** Change the printer name if you want, and then click [**Next >**].

Select the [**Yes**] check box to configure the printer as default.

- 15** Specify whether or not to print a test page, and then click [**Finish**].

The printer driver installation starts.

- 16** Restart the computer to complete installation.

 **Note**

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Changing the Port Settings for SmartDeviceMonitor for Client

---

Follow the procedure below to change the SmartDeviceMonitor for Client settings, such as TCP/IP timeout, recovery/parallel printing, and printer groups.

 **Note**

- There are no settings for NetBEUI protocol.
- 

### Windows 95/98:

---

- 1** Open [Printers] window from [Start] menu. .
  - 2** In the [Printers] window, click the icon of the printer you want to use. On the [File] menu, click [Properties]
  - 3** Click the [Details] tab, and then click [Configure Port].  
The [Port Settings] dialog box appears.
- 

### Windows 2000 / Windows NT 4.0:

---

- 1** Open [Printers] window from [Start] menu. .
- 2** In the [Printers] window, click the icon of the printer you want to use. On the [File] menu, click [Properties]
- 3** On the [Ports] tab, click [Configure Port]  
The [Port Settings] dialog box appears.

---

**Windows XP, Windows Server 2003:**

---

**1** Open the [Printers and Faxes] window from the [Start] menu.

The [Printers and Faxes] window appears.

**2** Click the icon of the machine you want to use. On the [File] menu, click [Properties]. The printer properties appear.

**3** Click the [Details] tab, and then click [Configure Port].

The [Port Settings] dialog box appears.

- For TCP/IP, timeout setting can be configured.

 **Note**

□ If no settings on the [Recovery/Parallel Printing] tab are available, follow the procedure below.

- ① Click [**Cancel**] to close the [**Port Configuration:**] dialog box.
- ② Start SmartDeviceMonitor for Client, and then right-click the SmartDeviceMonitor for Client icon on the taskbar.
- ③ Click [**Extended Features Settings**], and then select the [**Set Recovery/Parallel Printing for each port**] check box.
- ④ Click [**OK**] to close the [**Extended Features Settings**] dialog box

- User, proxy, and timeout settings can be configured for IPP.

 **Reference**

For information about these settings, see SmartDeviceMonitor for Client Help.

# Using the Standard TCP/IP Port

1

## Installing the PostScript 3 Printer Driver (Windows 2000)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next>].

**7** Click [Create a new port: ].

**8** Click [Standard TCP/IP], and then click [New Port...].

**9** Click [Next] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.

**10** Enter the printer name or IP address in the [Printer Name or IP Address] box, and then click [Next>].

When screen for Device selection appears, select "RICOH NetworkPrinter Driver C Model".

**11** Click [Finish] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.

**12** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**13** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**14** Click [Next >].

**15** Specify whether or not to print a test page, and then click [Next>].

**16** Click [Finish].

The printer driver installation starts.

 **Note**

- A user code can be set after the printer driver installation . For information about user code, see the printer driver Help.

---

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003)

---

 **Important**

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

 **Note**

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next>].

**7** Click [Create a new port: ].

**8** Click [Standard TCP/IP] in [Create a new Port], and then click [Next].

**9** Click [Standard TCP/IP], and then click [OK].

**10** Click [Next] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.

1

- 11** Enter the printer name or IP address in the [Printer Name or IP Address] box, and then click [**Next >**].

When screen for Device selection appears, select "RICOH NetworkPrinter Driver C Model".

- 12** Click [**Finish**] in the [Add Standard TCP/IP Printer Port Wizard] dialog box.

- 13** Check that the name of the machine whose driver you want to install is selected, and then click [**Next >**].

- 14** Change the printer name if you want, and then click [**Next >**].

Select the [**Yes**] check box to configure the printer as default.

- 15** Click [**Next >**].

- 16** Specify whether or not to print a test page, and then click [**Next >**].

- 17** Click [**Finish**].

The printer driver installation starts.

 **Note**

A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

# Using the LPR Port

## Installing the PostScript 3 Printer Driver (Windows 2000)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local printer], and then click [Next>].

**7** Click [Create a new port: ].

**8** Click [LPR Port], and then click [Next >].

**9** Enter the printer's IP address in the [Name or address of server providing lpd] box.

**10** Enter "lp" in the [Name of printer or print queue on that server] box, and then click [OK].

**11** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**12** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**13** Click [Next >].

**14** Specify whether or not to print a test page, and then click [Next>].

**15** Click [Finish].

The printer driver installation starts.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. "If this happens, launch "Setup.exe" on the CD-ROM root directory."

**3** Select an interface language, and then click [OK].

The default interface language is English.

#### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next >].

**6** Click [Local Printer], and then click [Next>].

**7** Click [Create a new port:].

**8** Click [LPR Port] in [Create a new Port], and then click [Next>].

**9** Enter the printer's IP address in the [Name or address of server providing lpd] box.

**10** Enter "lp" in the [Name of printer or print queue on that server box], and then click [OK].

**11** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**12** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**13** Click [Next >].

**14** Specify whether or not to print a test page, and then click [Next>].

**15** Click [Finish].

The printer driver installation starts.

#### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows NT 4.0)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Add Port:].

**7** Select [LPR Port], and then click [OK].

**8** Enter the printer's IP address in the [Name or address of server providing lpd box] box.

**9** Enter "lp" in the [Name of printer or print queue on that server] box, and then click [OK].

**10** Check that the name of the machine whose driver you want to install is selected, and then click [Next >].

**11** Change the printer name if you want, and then click [Next >].

Select the [Yes] check box to configure the printer as default.

**12** Specify whether or not to print a test page, and then click [Finish].

The printer driver installation starts.

**13** Restart the computer to complete installation.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

# Using as the Windows Network Printer

1

## Installing the PostScript 3 Printer Driver (Windows 95/98/Me)

### Important

- If you print from a print server connected to the printer using the SmartDevice-Monitor port, the client cannot use Recovery Printing and Parallel Printing.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Network Printer], and then click [Next].

**7** Click [Browse].

**8** Double-click the computer name you want to use as a print server in the [Browse for Printer] window.

**9** Select the printer you want to use, and then click [OK].

**10** Check the location of the selected printer is shown, and then click [Next].

**11** Change the printer name if you want, and then click [Next].

Select the [Yes] check box to configure the printer as default.

**12** Specify whether or not to print a test page, and then click [Finish].

**13** Restart the computer.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows 2000)

### Important

- Installing a printer driver requires Administrators permission. Log on using an account that has Administrators permission.
- If you print from a print server connected to the printer using the SmartDevice-Monitor port, the client cannot use Recovery Printing and Parallel Printing.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Network printer], and then click [Next].

**7** Click [Next].

**8** Double-click the computer name you want to use as a print server in the [Shared printers] window.

**9** Select the printer you want to use, and then click [Next].

**10** The printer driver installation starts.

**11** Click [Next>].

Select the [Yes] check box to configure the printer as default.

**12** Click [Finish].

Restart the computer to complete installation.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003)

1

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.
- If you print from a print server connected to the printer using the SmartDeviceMonitor port, the client cannot use Recovery Printing and Parallel Printing.
- If you print with a Windows XP or Windows Server 2003 print server, SmartDeviceMonitor notification functions may not be possible for the client.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

#### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Network printer] and then click [Next].

**7** Click [Next].

**8** Double-click the computer name you want to use as a print server in the [Shared printers] window.

**9** Select the printer you want to use, and then click [Next].

**10** The printer driver installation starts.

**11** Click [Next>].

Select the [Yes] check box to configure the printer as default.

**12** Click [Finish].

Restart the computer to complete installation.

#### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows NT 4.0)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.
- If you print from a print server connected to the printer using the SmartDevice-Monitor port, the client cannot use Recovery Printing and Parallel Printing.
- To print from a Windows NT 4.0 print server, install the printer driver before you connect the print server to the printer.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Network printer], and then click [Next].

**7** Click [Next].

**8** Double-click the computer name you want to use as a print server in the [Shared printers] window.

**9** Select the printer you want to use, and then click [Next].

**10** Check the location of the selected printer is shown, and then click [Next].

**11** Change the printer name if you want, and then click [Next].

**12** Specify whether or not to print a test page, and then click [Finish].

Restart the computer to complete installation.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

# Using as the NetWare Print Server/Remote Printer

1

---

## When using the PostScript 3 Printer Driver

---

Follow the procedure below to set up the PostScript 3 printer driver.

**1** In the [Printers] or [Printers and Faxes] window, open the printer properties.

**2** Click the [PostScript] tab.

 **Note**

When using Windows 2000/XP or Windows NT 4.0, click the [Device Settings] tab, and then proceed to step to clear the check box.

**3** Click [Advanced].

**4** Clear the [Send CTRL+D before job] and [Send CTRL+D after job] check boxes, and then click [OK].

**5** Click [OK] to close the printer properties dialog box.

# Installing the Printer Driver Using USB

This section explains how to install printer drivers using USB.

## Important

- Make sure that machine is connected to the computer's USB ports using the USB interface cable.

Before installing, check that only the operating system is running on the computer and no print jobs are in progress.

The printer drivers can be installed from the CD-ROM provided with this machine.

## Windows 98 SE/Me - USB

### Important

- Installation via USB is not possible under Windows 95/98. Upgrade to Windows 98 SE/Me.

When USB is first used, the plug and play function starts and the [**New Hardware Found**], [**Device Driver Wizard**], or [**Add New Hardware Wizard**] dialog box appears, depending on the operating system.

If the printer driver has already been installed, plug and play is enabled, and the icon of the printer connected to the "USB" port is added to the [**Printers**] window.

- 1 Turn off the power of the machine.**
- 2 Connect the machine with the computer via USB cable.**  
Connect the USB cable firmly.
- 3 Turn on the power of the machine.**
- 4 Click [Next>].**
- 5 Click [Search for the best driver for your device. {Recommended}.], and then click [Next>].**
- 6 Select the [Specify a location:] check box, and then click [Browse...].**  
The [**Browse for Folder**] dialog box appears.
- 7 Insert the CD-ROM into the CD-ROM drive.**

### Note

- When Auto Run starts, click [**Exit**].
- To disable Auto Run, press the [**Shift**] key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.

**8** Specify the location where USB Printing Support is located, and then click [Next>].

If the CD-ROM drive is D, the source files of USB Printing Support are stored in the following location:

D:\DRIVERS\RPCS\WIN9X\_ME

**9** Check the location, and then click [Next].

USB Printing Support is installed.

**10** Click [Finish].

If the printer driver has already been installed, plug and play is enabled, and the icon of the printer connected to the "USB001" port is added to the [Printers] window.

**11** Click [Next].**12** Click [Search for the best driver for your device. {Recommended}.], and then click [Next>].**13** Select the [Specify a location:], check box, and then click [Browse...].

The [Browse for Folder] dialog box appears.

**14** Insert the CD-ROM into the CD-ROM drive.**Note**

- When Auto Run starts, click [Exit].
- To disable Auto Run, press the [**Shift**] key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.

**15** Specify the location where the source files of the printer driver is stored, and then click [Next].

If the CD-ROM drive is D, the source files of the printer driver are stored in the following location:

- PostScript 3

D:\DRIVERS\PS3\WIN9X\_ME\Language\DISK1

**16** Check the location, and then click [Next].

Add Printer Wizard starts.

**17** Click [Finish].

Installation is complete. If installation is successful, the icon of the printer connected to the "USB001" port is added to the [Printers] window.

**Note**

- The number after "USB" varies depending on the number of printers connected.
- It is not necessary to reinstall USB Printing Support when connecting a different machine via USB interface when USB Printing Support is installed.
- After installing USB Printing Support, if the printer driver is not installed, follow the plug-and-play instructions of the printer.

## Windows 2000 - USB

### Important

- Installing a printer driver requires Administrators permission. Log on using an account that has Administrators permission.

When USB is first used, Found New Hardware Wizard starts, and USB Printing Support is installed automatically.

If the printer driver has already been installed, plug and play is enabled, and the icon of the printer connected to the "USB" port is added to the [Printers] window.

If the printer driver is not installed, follow the plug-and-play instructions of the printer to install it from the CD-ROM provided.

**1 Turn off the power of the machine.**

**2 Connect the machine with the computer via USB cable.**

Connect the USB cable firmly.

**3 Turn on the power of the machine.**

**4 Click [Next] in the [Found New Hardware Wizard] dialog box.**

**5 Select the [Search for a suitable driver for my device (recommended)] check box, and then click [Next].**

**6 Select the [Specify location] check box, and then click [Next].**

**7 Insert the CD-ROM into the CD-ROM drive.**

### Note

- When Auto Run starts, click [Exit].

- To disable Auto Run, press the left **[Shift]** key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.

**8 Specify the location where the source files of the printer driver is stored.**

If the CD-ROM drive is D, the source files of the printer driver are stored in the following location:

- PostScript 3  
D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1

**9 Check the printer driver location, and then click [OK].**

**10 Click [Next].**

**11 Click [Finish].**

If the printer driver has already been installed, plug and play is enabled, and the icon of the printer connected to the "USB001" port is added to the [Printers] window.

### Note

- The number after "USB" varies depending on the number of printers connected.

## Windows XP, Windows Server 2003 - USB

### Important

- Installing a printer driver requires Administrators permission. Log on using an account that has Administrators permission.

When USB is first used, Found New Hardware Wizard starts, and USB Printing Support is installed automatically.

If the printer driver has already been installed, plug and play is enabled, and the icon of the printer connected to the "USB" port is added to the [**Printers**] window.

The printer drivers can be installed from the CD-ROM provided with this machine.

If the printer driver is not installed, follow the plug-and-play instructions of the printer to install it from the CD-ROM provided.

**1 Turn off the power of the printer.**

**2 Connect the machine with the computer via USB cable.**

Connect the USB cable firmly.

**3 Turn on the power of the machine.**

**4** In the Found New Hardware Wizard display, click [**Search for a suitable driver for my device [recommended]**], and then click [**Next>**].

**5** To disable Auto Run, press the left [**SHIFT**] key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.

#### Note

- If Auto Run starts, click [**Cancel**], and then [**Exit**].

**6** Select the [**Include this location in the search**] check box under [**Search for the best driver in these location**], and then click [**Browse**] to select the printer driver location.

If the CD-ROM drive is D, the source files of the printer driver are stored in the following location:

- PostScript 3  
D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1

**7 Check the printer driver location, and then click [**Next**].**

**8 Click [**Continue**].**

**9 Click [**Finish**].**

If installation is successful, the icon of the printer connected to the "USB001" port is added to the [**Printers**] window.

#### Note

- The number after "USB" varies depending on the number of printers connected.

## Troubleshooting USB

Problems	Solutions
The machine is not automatically recognized.	Turn off the power of the machine, reconnect the USB cable, and then turn it on again.
Windows has already configured the USB settings.	<p>Open Windows' Device Manager, and then, under [<b>Universal Serial Bus controllers</b>], remove any conflicting devices. Conflicting devices have a yellow [!] or [?] icon by them. Take care not to accidentally remove required devices. For details, see Windows Help.</p> <p> <b>Note</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> When using Windows 2000/XP or Windows Server 2003, an erroneous device is displayed under [<b>USB Controller</b>] in the [<b>Device Manager</b>] dialog box.</li> </ul>

# Printing with Parallel Connection

To use a machine connected using a parallel interface, click [**LPT1**] when installing the printer driver.

## Installing the PostScript 3 Printer Driver (Windows 95/98/Me)

- 1** Quit all applications currently running.
- 2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

- 3** Select an interface language, and then click [**OK**].

The default interface language is English.

 **Note**

The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages:  
Cestina, Magyar, Polski, Portugues, Suomi

- 4** Click [**PostScript 3 Printer Driver**].

Add Printer Wizard starts.

- 5** Click [**Next**].

- 6** Click [**Local Printer**], and then click [**Next**].

A dialog box for selecting the printer manufacturer and model name appears.

- 7** Select the name of the machine whose driver you want to install, and then click [**Next**].

- 8** In the [**Available ports:**] box, click [**Printer Port**], and then click [**Next**].

- 9** Change the printer name if you want, and then click [**Next**].

Select the [**Yes**] check box to configure the printer as default.

- 10** Specify whether or not to print a test page, and then click [**Finish**].

- 11** Restart the computer to complete installation.

 **Note**

A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows 2000)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

#### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Click [Local Printer], and then click [Next].

A dialog box for selecting the printer manufacturer and model name appears.

**7** Select the name of the machine whose driver you want to install, and then click [Next].

**8** Specify whether or not to print a test page, and then click [Finish].

**9** Select whether or not you want to print a test page, and then click [Finish].

The printer driver installation starts.

**10** Restart the computer to complete installation.

#### Note

- A user code user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows XP, Windows Server 2003)

---

1

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

#### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [**PostScript 3 Printer Driver**].

Add Printer Wizard starts.

**5** Click [**Next**].

**6** Click [**Local Printer**], and then click [**Next**].

**7** Select the port you want to use, and then click [**Next**].

A dialog box for selecting the printer manufacturer and model name appears.

**8** Select the name of the machine whose driver you want to install, and then click [**Next**].

**9** Change the printer name if you want, and then click [**Next**].

**10** Specify whether or not to print a test page, and then click [**Finish**].

The printer driver installation starts.

**11** Restart the computer to complete installation.

#### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

## Installing the PostScript 3 Printer Driver (Windows NT 4.0)

### Important

- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

**1** Quit all applications currently running.

**2** Insert the CD-ROM into the CD-ROM drive.

The installer starts.

Auto Run may not work with certain operating system settings. If this happens, launch "Setup.exe" on the CD-ROM root directory.

**3** Select an interface language, and then click [OK].

The default interface language is English.

### Note

- The printer driver with the selected language will be installed. The printer driver will be installed in English if you select the following languages: Cestina, Magyar, Polski, Portugues, Suomi

**4** Click [PostScript 3 Printer Driver].

Add Printer Wizard starts.

**5** Click [Next].

**6** Select the port you want to use, and then click [Next].

A dialog box for selecting the printer manufacturer and model name appears.

**7** Select the name of the machine whose driver you want to install, and then click [Next].

**8** Change the printer name if you want, and then click [Next].

**9** Click [Next].

**10** Specify whether or not to print a test page, and then click [Finish].

Set up the options with the printer driver.

**11** Restart the computer to complete installation.

### Note

- A user code can be set after the printer driver installation. For information about user code, see the printer driver Help.

# Installing the Printer Driver Using IEEE 1394 (SCSI print)

1

The printer drivers can be installed from the CD-ROM provided with this machine.

## Important

- Quit all applications currently running, and do not print during installation.
- Do not connect IEEE 1394 or USB devices to the computer or turn on another printers during installation.
- Before uninstalling the printer driver, check that the IEEE 1394 interface cable is disconnected from the computer.
- SCSI print must be set to "active" from the control panel. For details, see *Network Guide*.
- This machine can receive print data from one computer at a time only. An message may appear if jobs from different computers collide.
- If jobs collide, the first received is printed first.
- When the printer driver is properly installed, connecting or disconnecting the optional IEEE 1394 cable causes the printer icon to change.

---

## Windows 2000

---

### Note

- If [Found New Hardware Wizard] appears every time the computer is started or the cable is connected, disable the device. To install another printer driver after setting the "1394\_00n" port, click [1394\_00] as a port during the printer driver installation.
- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.
- The optional 1394 interface unit can be used only with Service Pack 1 (SP1) or higher.

- 1** Connect the machine and computer using the IEEE 1394 interface cable.
- 2** Click [Next] in the [Found New Hardware Wizard] dialog box.
- 3** When the message "This wizard will complete the installation for this Device: Unknown" appears, click [Specify a location], and then click [Next>].
- 4** When the message "Locate Driver Files" appears, select the [Optional search locations.] check box, and then click [Specify a location], and then click [Next>].

- 5** To disable Auto Run, press the left **[SHIFT]** key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.

If Auto Run starts, click **[Cancel]**, and then **[Exit]**.

- 6** Click **[Browse]**.

- 7** Select the printer driver you want to use.

If the CD-ROM drive is D, the source files of the printer driver are stored in the following location:

- PostScript 3  
D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1\

- 8** Click **[Open]**.

- 9** Click **[OK]**.

- 10** Follow the instructions.

When installation is complete, the printer connected to "1394\_00n" appears in the **[Printers]** window. ("n" shows the number of printers connected.)

 **Note**

- If the printer driver has already been installed, the printer icon is added to the **[Printers]** window. In this case, printer driver installation is not necessary.
- If printing does not work properly after the installation, delete the port and reinstall the printer driver. For details, see "Printer Does Not Print", *Maintenance Guide*.
- If you do not want to install the printer when Found New Hardware Wizard starts under an operating system that supports SCSI print, disable the device by following the procedure below.
  - ① When the **[Found New Hardware Wizard]** dialog box appears, click **[Next>]**.
  - ② When the message "This wizard will complete the installation for this Device: Unknown" appears, select the **[Search for a suitable driver for my device recommended]** check box, and then click **[Next>]**.
  - ③ When the message "Please choose your search and installation option." appears, clear all check boxes from **[Search for the best driver in these locations.]**, and then click **[Next>]**.
  - ④ When the message "Driver Files Search Results" appears, select the **[Disable the device. The Add/Remove Hardware Wizard in the control Panel can be able to complete the driver installations.]** check box, and then click **[Finish]**.

## Windows XP, Windows Server 2003

### Important

- SCSI print must be set to "active" from the control panel. For details, see *Network Guide*.
- Installing this printer driver requires Administrators permission. Log on using an account that has Administrators permission.

### Note

- This machine can receive print data from one computer at a time only. If a job from a computer collides with other data, a message may appear on the computer.
- To install another printer driver after setting the "1394\_00n" port, click [1394\_00] as a port during the printer driver installation.
- When the printer driver is properly installed, connecting or disconnecting the optional IEEE 1394 cable causes the printer icon to change.

### **1 Connect the machine and computer using the IEEE 1394 interface cable.**

When the [**Found New Hardware Wizard**] dialog box appears, check that [**This wizard helps you install software for: (Unknown)**] is displayed.

### **2 Select the [**Install from a list on specific location (Advanced)**] check box, and then click [**Next>**].**

### **3 When the message "Please choose your search and installation option." appears, select the [**Search for the best driver in these locations.**] check box, select the [**Include this location in the search:**] check box, and then select the [**Include this location in the search:**] check box.**

### **4 To disable Auto Run, press the left [**SHIFT**] key when inserting the CD-ROM into the drive and keep it pressed until the computer finishes reading from the CD-ROM.**

### Note

- If Auto Run starts, click [**Cancel**], and then [**Exit**].

### **5 Specify the location where the source files of the printer driver is stored, and then click [**Next**].**

If the CD-ROM drive is D, the source files of the printer driver are stored in the following location:

- PostScript 3  
D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1\

When installation is complete, the printer connected to "1394\_00n" appears in the [**Printers and Faxes**] window. ("n" shows the number of printers connected.)

## 6 Follow the instructions.

### Note

- If the printer driver has already been installed, the printer icon is added to the [Printers and Faxes] window. In this case, printer driver installation is not necessary.
- Even if the printer driver is already installed, the message "Found New Hardware Wizard" may appear when the machine and the computer are connected using the IEEE 1394 interface cable for the first time. If it does, install the printer driver.
- If printing does not work properly after the installation, delete the port and reinstall the printer driver. For details, see "Printer Does Not Print", *Maintenance Guide*.
- If you do not want to install the printer when Found New Hardware Wizard starts under an operating system that supports SCSI print, disable the device by following the procedure below
  - ① When the [Found New Hardware Wizard] dialog box appears, check that [This wizard helps you install software for: Unknown] displayed, select [Install from a list on specific location (Advanced)] check box, and then click [Next>].
  - ② When the message "Please choose your search and installation option." appears, clear all check boxes from [Search for the best driver in these locations.], and then click [Next>].
  - ③ When the message "The wizard could not find the software on your computer for.." appears, click [OK].
  - ④ When the message "Cannot Install this Hardware" appears, select the [Don't prompt again to install the software] check box, and then click [Finish].

# Printing with Bluetooth™ Connection

1

## Supported Profiles

### ◆ SPP, HCRP

- A maximum of two Bluetooth adaptor or Bluetooth-equipped computers can be connected at the same time using the Bluetooth interface: one by SPP, one by HCRP.
- When connecting more than one Bluetooth adaptor or Bluetooth-equipped computer at the same time, the first device that establishes connection is selected. When selecting the connection between the other devices, cancel the first established connection.
- Conditions for bidirectional communications
  - SPP connection does not support bidirectional communications.
  - HCRP connection supports bidirectional communications.

### ◆ BIP

- For BIP connection, a module including PostScript 3 must be installed in the machine.
- Only one Bluetooth adaptor or Bluetooth-equipped computer can be connected via BIP.
- Only JPEG images that can be printed using BIP.
- User codes are disabled for BIP.  
You cannot print if print functions are restricted.
- Some printers do not support BIP.

## Printing with Bluetooth™ Connection

To install the printer driver, follow the procedure used to install parallel interface.

### Important

- To install the printer driver under Windows 2000/XP Professional, Windows Server 2003, and Windows NT 4.0, you must have an account that has Manage Printers permission. Log on as an Administrators or Power Users group member.

### Note

- System requirements vary depending on the Bluetooth standard and specifications. For details, see the manuals provided with each product.
- For information about setting up Bluetooth under other operating systems or using it with different utilities, see the manuals provided with those operating systems or utilities.

- 1** Start 3Com Bluetooth Connection Manager.
- 2** Check that the printer you want to use appears in 3Com Bluetooth Connection Manager.
- 3** On the [Tool] menu, click [COM port].
- 4** Check that the message "Bluetooth Serial Client (COMX)" appears under Client Ports. (X indicates the COM port number used by Bluetooth™.)
- 5** Click [Close].
- 6** On the [Start] menu, point to [Settings], and then click [Printers].  
The [Printers] window appears.
- 7** Click the icon of the printer you want to use.
- 8** On the [File] menu, click [Properties].
- 9** Click the [Ports] tab.
- 10** Under [Port], select the [COMX:] check box. X indicates the COM port number used by Bluetooth™.

- 11** Click [OK].

Close the [Printers] window.

- ❖ If a dialog box appears while transmitting a print job, reestablish network connection as follows:
  - ① Select the printer you want to use in the [Printers and Fax] box.
  - ② Click [Connect].

#### Note

- To always use the same printer, select the [Always use for this connection] check box.

#### Reference

For details, see the manuals provided with the Bluetooth adaptor or computer equipped with Bluetooth.

---

## Configuring Security Mode Settings

---

**1** Start 3Com Bluetooth Connection Manager.

**2** On the [Tools] menu, click [Security Mode].

The [Security Mode] dialog box appears.

**3** Select the security mode in the [Security Mode:] list.

If you click [High], or [Custom], and specify [Link] in the [Custom Settings] dialog box, enter the Bluetooth password. For information about entering the password, see p.46 “Printing in the Security Mode”

For all other security modes and custom settings, no password is required.

 **Note**

For information about each mode, see the manuals provided with the utility.

**4** Click [OK].

Close the [Security Mode] dialog box.

 **Reference**

For details about the security mode, see 3Com Bluetooth Connection Manager Help. For details about the password entry which is required to transmit print jobs, see p.46 “Printing in the Security Mode”.

---

## Printing in the Security Mode

---

**1** Send the print job to the printer in use.

Depending on the computer configuration, the [Connect] dialog box may appear. If it does, use it to establish the network connection.

**2** The [Authentication] dialog box appears.

**3** Enter the Bluetooth password, and then click [OK].

As the Bluetooth password, enter the last four digits of the machine's serial number. You can find the serial number on the label on the back of the machine. For example, if the serial number is 00A0-001234, the Bluetooth password is 1234.

**4** The print job is sent.

 **Note**

The Bluetooth password differs for each machine and cannot be changed.

# If a Message Appears during Installation

Message number 58 or 34 indicates the printer driver cannot be installed using Auto Run. Install the printer driver using [**Add Printer**] or [>**Install Printer**].

---

For Windows 95/98/Me, Windows 2000 and Windows NT 4.0:

- 1** On the [Start] menu, point to [Settings], and then click [Printers].
- 2** Double-click the Add Printer icon.
- 3** Follow the instructions in Add Printer Wizard.

 **Note**

- If the printer driver is on a CD-ROM, the location of the PostScript 3 printer driver is either D:\DRIVERS\PS3\WIN9X\_ME\Language\DISK1, D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1, or D:\DRIVERS\PS3\NT4\Language\DISK1. If the installer starts, click [**Cancel**] to quit.

---

For Windows XP Professional and Windows Server 2003:

- 1** On the [Start] menu, click [Printers and Faxes].
- 2** Click [Add a printer].
- 3** Follow the instructions in Add Printer Wizard.

 **Note**

- If the printer driver is on a CD-ROM, the location of the RPCS printer driver is D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1. If the installer starts, click [**Cancel**] to quit.

---

For Windows XP Home Editions:

- 1** On the [Start] menu, click [Control Panel].
- 2** Click [Printers and Other Hardware].
- 3** Click [Printers and Faxes].
- 4** Click [**Install Printer**].
- 5** Follow the instructions in Add Printer Wizard.

 **Note**

- If the printer driver is on a CD-ROM, the location of the RPCS printer driver is D:\DRIVERS\PS3\WIN2K\_XP\Language\DISK1. If the installer starts, click [**Cancel**] to quit.

# Making Option Settings for the Printer

Make option settings for the machine using the printer driver when bidirectional communication is disabled.

## 🔍 Reference

For details about making option settings for the printer, see p.69 “Setting Up Options”.

Set up option settings when bidirectional communications are disabled.

## ⚠ Limitation

- Under Windows 2000/XP and Windows Server 2003, Manage Printers permission is required to change the printer properties in the [**Printers**] folder. Log on as an Administrators or Power Users group member.
- Under Windows NT 4.0, Full Control permission is required to change the printer properties in the [**Printers**] folder. Log on as an Administrators or Power Users group member.

**1** On the [**Start**] menu, point to [**Settings**], and then click [**Printers**].

The [**Printers**] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [**File**] menu, click [**Properties**].

**4** Click the [**Accessories**] tab.

## ✎ Note

- Under Windows 2000/XP, Windows Server 2003 and Windows NT 4.0, click the [**Device Settings**] tab.

**5** Select options installed from the [**Option**] area, and then make the necessary settings.

**6** Select the total amount of the memory in [**Total memory:**], when the optional SDRAM module is added.

**7** Under [**Paper source tray settings**], click and highlight the tray to be used, and then select the appropriate size, position, and type for the tray. Select the [**Tray locking**] check box to exclude the tray from the targets of automatic tray selection.

**8** Click [**OK**] to close the printer properties dialog box. Click the [**Defaults**] tab, and then click [**Change Accessories**] to display the option selection.

# Setting Up the Printer Driver

## Windows 95/98/Me - Accessing the Printer Properties

There are two methods to open the printer properties dialog box.

### Making printer default settings

To make the printer default settings, open the printer properties dialog box from the [Printers] window.

#### Important

- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

#### Note

- With some applications, the printer driver settings are not used, and the application's own default settings are applied.

**1** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Properties].

The printer properties dialog box appears.

**4** Make the necessary settings, and then click [OK].

**5** Click [OK].

#### Reference

For details, see Printer Driver Help.

### Making printer settings from an application

You can make printer settings for a specific application.

To make printer settings for a specific application, open the printer properties dialog box from that application. The following explains how to make settings for the WordPad application provided with Windows 95/98/Me.

#### Note

- The procedure to open the printer properties dialog box may vary depending on the application. For details, see the manuals provided with the application you use.
- With some applications, the printer driver settings are not used, and the application's own default settings are applied.
- Any settings you make in the following procedure are valid for the current application only.
- General users can change the properties displayed in the [Print] dialog box of an application. Settings made here are used as defaults when printing from this application.

1

**1** On the [File] menu, click [Print].

The [Print] dialog box appears.

**2** Select the printer you want to use in the [Name] list, and then click [Properties].

The printer properties dialog box appears.

**3** Make the necessary settings, and then click [OK].

**4** Click [OK] to start printing.

 **Reference**

For details, see Printer Driver Help.

---

## Windows 2000 - Accessing the Printer Properties

---

### Making printer default settings - the printer properties

---

 **Important**

- To change the printer default settings including option configuration settings, log on using an account that has Manage Printers permission. Members of the Administrators and Power Users groups have Manage Printers permission by default.
- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Properties].

The printer properties dialog box appears.

**4** Make the necessary settings, and then click [OK].

 **Note**

- Settings you make here are used as the default settings for all applications.
- Do not make a setting for [Form to Tray Assignment].

 **Reference**

For details, see Printer Driver Help.

---

## Making printer default settings - Printing Preferences

---

 **Important**

- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Printing Preferences...].

The [Printing Preferences] dialog box appears.

**4** Make the necessary settings, and then click [OK].

 **Note**

- Settings you make here are used as the default settings for all applications.

 **Reference**

For details, see Printer Driver Help.

---

## Making printer settings from an application

---

You can make printer settings for a specific application.

To make printer settings for a specific application, open the [Printing Preferences] dialog box from that application. The following explains how to make settings for the WordPad application provided with Windows 2000.

 **Note**

- The procedure to open the [Printing Preferences] dialog box may vary depending on the application. For details, see the manuals provided with the application you use.
- Any settings you make in the following procedure are valid for the current application only.
- General users can change the properties displayed in the [Print] dialog box of an application. Settings made here are used as defaults when printing from this application.

**1** On the [File] menu, click [Print...].

The [Print] dialog box appears.

**2** Select the printer you want to use in the [Select Printer] list.

**3** Make the necessary settings, and then click [Print] to start printing.

 **Reference**

For details, see Printer Driver Help.

## Windows XP, Windows Server 2003 - Accessing the Printer Properties

---

1

### Making printer default settings - the printer properties

---

#### Important

- To change the printer default settings including option configuration settings, log on using an account that has Manage Printers permission. Members of the Administrators and Power Users groups have Manage Printers permission by default.
- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, click [Printers and Faxes].

The [Printers and Faxes] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Properties].

The printer properties dialog box appears.

**4** Make the necessary settings, and then click [OK].

#### Note

- Settings you make here are used as the default settings for all applications.
- Do not make a setting for [Form to Tray Assignment].

#### Reference

For details, see Printer Driver Help.

---

### Making printer default settings - Printing Preferences

---

#### Important

- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, click [Printers and Faxes].

The [Printers and Faxes] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Printing Preferences...].

The [Printing Preferences] dialog box appears.

**4** Make the necessary settings, and then click [OK].

#### Note

- Settings you make here are used as the default settings for all applications.

#### Reference

For details, see Printer Driver Help.

---

## Making printer settings from an application

---

You can make printer settings for a specific application.

To make printer settings for a specific application, open the [**Printing Preferences**] dialog box from that application. The following explains how to make settings for the WordPad application provided with Windows XP.

 **Note**

- The procedure to open the [**Printing Preferences**] dialog box may vary depending on the application. For details, see the manuals provided with the application you use.
- Any settings you make in the following procedure are valid for the current application only.
- General users can change the properties displayed in the [**Print**] dialog box of an application. Settings made here are used as defaults when printing from this application.

**1** On the [**File**] menu, click [**Print...**].

The [**Print**] dialog box appears.

**2** Select the printer you want to use in the [**Select Printer**] list.

**3** Make the necessary settings, and then click [**Print**] to start printing.

 **Reference**

For details, see Printer Driver Help.

## Windows NT 4.0 - Accessing the Printer Properties

---

1

### Making printer default settings - the printer properties

---

#### Important

- To change the printer default settings including option configuration settings, log on using an account that has Full Control permission. Members of the Administrators, Server Operators, Print Operators, and Power Users groups have Full Control permission by default.
- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears .

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Properties].

The printer properties dialog box appears.

**4** Make the necessary settings, and then click [OK].

#### Note

- Settings you make here are used as the default settings for all applications.
- Do not make a setting for [Form to Tray Assignment].

#### Reference

For details, see Printer Driver Help.

---

### Making printer default settings - Default

---

#### Important

- To change the printer default settings including option configuration settings, log on using an account that has Full Control permission. Members of the Administrators, Server Operators, Print Operators, and Power Users groups have Full Control permission by default.
- You cannot change the printer default settings for each user. Settings made in the printer properties dialog box are applied to all users.

**1** On the [Start] menu, point to [Settings], and then click [Printers].

The [Printers] window appears.

**2** Click the icon of the printer you want to use.

**3** On the [File] menu, click [Document Defaults].

The [Default] dialog box appears.

**4** Make the necessary settings, and then click [OK]. **Note**

- Settings you make here are used as the default settings for all applications.

 **Reference**

For details, see Printer Driver Help.

---

**Making printer settings from an application**

---

You can make printer settings for a specific application.

To make printer settings for a specific application, open the printer properties dialog box from that application. The following explains how to make settings for the WordPad application provided with Windows NT 4.0.

 **Note**

- The procedure to open the printer properties dialog box may vary depending on the application. For details, see the manuals provided with the application you use.
- With some applications, the printer driver settings are not used, and the application's own default settings are applied.
- Any settings you make in the following procedure are valid for the current application only.
- General users can change the properties displayed in the [Print] dialog box of an application. Settings made here are used as defaults when printing from this application.

**1** On the [File] menu, click [Print].

The [Print] dialog box appears.

**2** Select the printer you want to use in the [Name] list, and then click [Properties].

The printer properties dialog box appears.

**3** Make the necessary settings, and then click [OK].**4** Click [OK] to start printing. **Reference**

For details, see Printer Driver Help.



# 2. Mac OS Configuration

## Mac OS

This section explains how to configure a Mac OS to use EtherTalk and USB.

The following explains how to configure Mac OS 9.1. If you are not using Mac OS 9.1, see the manual of the Mac OS you are using for details

### Important

- For Mac OS 8.6 and higher. (Mac OS X Classic environment is supported.)

### Note

- The PostScript 3 printer driver is stored in the following folder on the CD-ROM.

Mac OS 8 and 9:PS Driver:(language):Disk1

---

## Installing the PostScript 3 Printer Driver and PPD File

---

It is necessary to install a printer driver and PPD files to print from a Mac OS.

Follow the procedure below to install a printer driver and a PPD file into a Mac OS using Mac OS 8.6 and higher.

---

### PostScript 3 Printer Driver

---

- 1** Insert the CD-ROM into the CD-ROM drive.
- 2** Double-click the CD-ROM drive icon.
- 3** Double-click the [Mac OS 8 and 9] folder.
- 4** Double-click the [PS Driver] folder.
- 5** Double-click the folder of the language you use.
- 6** Open [DISK1], and then double-click the installer icon.
- 7** Follow the instructions on the screen.

## PPD Files

---

2

- 1** Double-click the CD-ROM drive icon.
  - 2** Double-click the [Mac OS 8 and 9] folder.
  - 3** Double-click the [Printer Descriptions] folder.
  - 4** Double-click the folder of the language you use.
  - 5** Open the [DISK1] folder.
  - 6** Drag the PPD file and the plugin file into [Printer Descriptions] in [Extensions] under [System Folder].
  - 7** Restart the Mac OS.
- 

## Setting Up PPD Files

---

### Important

- Make sure that the printers are connected to an AppleTalk network before performing the following procedure.

- 1** On the [Apple] menu, click [**Chooser**].
- 2** Click the Adobe PS icon.
- 3** In the [Select a PostScript Printer:] list, click the name of the printer you want to use.
- 4** Click [**Create**].
- 5** Click the printer you want to use, and then click [**Select**].

A PPD file is set up and the Adobe PS icon appears at the left of the printer name in the list. Follow the procedure on p.59 "Setting Up Options" to make option settings; otherwise close the [**Chooser**] dialog box.

## Creating a Desktop Printer Icon

### Important

- Make sure that printers are connected to the USB before performing the following procedure.

To use a printer connected by USB, create a desktop printer icon.

- 1** Double-click [Desktop Printer Utility] in the [AdobePS Components] folder.
- 2** Click [AdobePS] in [With:], click [Printer (USB)] in [Create Desktop], and then click [OK].
- 3** Click [Change] in [USB Printer Selection].
- 4** Select the model you are using in [Select a USB Printer:], and then click [OK].
- 5** Click [Auto Setup] in [PostScript™ Printer Description (PPD) File].
- 6** Click [Create].
- 7** Enter the printer name, and then click [Save].  
The printer icon appears on the desktop.
- 8** Quit Desktop Printer Utility.

## Setting Up Options

- 1** On the [Apple] menu, click [Chooser].
- 2** Click the Adobe PS icon.
- 3** In the [Select the PostScript Printer:] list, click the name of the printer you want to use, and then click [Setup].
- 4** Click [Configure].  
A list of options appears.
- 5** Select the option you want to set up, and then select an appropriate setting for it.
- 6** Click [OK].  
The list of options closes.
- 7** Click [OK].  
The [Chooser] dialog box appears.
- 8** Close the [Chooser] dialog box.

### Note

- If the option you want to select is not displayed, PPD files may not be set up correctly. To complete the setup, check the name of the PPD file displayed in the dialog box.

## Installing the ColorSync Profiles

---

ColorSync profiles enable a printer to print colors consistent with those on the computer display. You must install the ColorSync profile to use this function. Follow the procedure below to install the ColorSync profiles.

2

- 1** Start a Mac OS.
- 2** Double-click the hard disk icon, and then open the appropriate folder for installing the ColorSync profiles.

The location of the appropriate folder may vary depending on the version of the Mac OS. The following are examples:

- System: Preferences: ColorSync profiles
- System: ColorSync profiles

- 3** Insert the CD-ROM into the CD-ROM drive.

The CD-ROM drive icon appears.

- 4** Double-click the CD-ROM drive icon.

The contents of the CD-ROM appear.

- 5** Double-click the [Mac OS 8 and 9] folder.

- 6** Double-click the [ColorSync™ Profiles] folder.

- 7** Drag the file to the [ColorSync™ Profiles] folder on the hard disk.

The ColorSync profiles are installed.

 **Note**

- The ColorSync profiles are consistent with color characteristics defined by the International Color Consortium (ICC).
- For some computer displays, particular settings need to be created by ColorSync. For details, see the appropriate manuals for your computer display.

---

## Installing Adobe Type Manager

---

 **Important**

- Quit all applications currently running before installation. Install ATM after you restart the computer.

- 1** Start a Mac OS.
- 2** Insert the CD-ROM into the CD-ROM drive.
- 3** Double-click the CD-ROM drive con.
- 4** Double-click the [Mac OS 8 and 9] folder.

- 
- 5** Double-click the [ATM] folder.
  - 6** Double-click the ATM 4.6.3 installer icon.
  - 7** Follow the instructions on the screen.
  - 8** When the procedure is complete, restart the computer. ATM will be completely installed only after restarting.
  - 9** On the [Apple] menu, open [Control Panel], and then click [~ATM].
  - 10** The ATM control panel opens.

 **Note**

- For details about installation, see the operating instructions in the ATM folder.

2

---

## Installing Screen fonts

---

Follow the procedure below to install screen fonts.

The screen fonts described below can be found in the [Fonts] folder on the CD-ROM.

- 1** Start a Mac OS.
- 2** Insert the CD-ROM into the CD-ROM drive.  
The CD-ROM drive icon appears.
- 3** Double-click the CD-ROM drive icon.  
The contents of the CD-ROM appear.
- 4** Double-click the [Mac OS 8 and 9] folder.
- 5** Double-click the [Fonts] folder.
- 6** Double-click the [Screen font] folder.
- 7** Double-click the [TrueType] or [Type1] folder.  
Select the font type you want to use.
- 8** Copy the fonts you want to install in [Fonts] under [System Folder].  
A confirmation message appears.
- 9** Click [OK].  
The fonts are installed.
- 10** Restart the Mac OS.

## Using USB Interface

Follow the procedure below to setup USB connection.

2

- 1** Open the [AdobePS Component] folder on the hard disk.
- 2** Double-click [Desktop Printer Utility].
- 3** Click [AdobePS] in [With:], click [Printer (USB)] in [Create Desktop], and then click [OK].
- 4** Click [Change] in [PostScript<sup>TM</sup> Printer Description (PPD) File].
- 5** Select the PPD files of the connected printer, and then click [Select].
- 6** Click [Change] in [USB Printer Selection].
- 7** Select the model you are using in [Select a USB Printer:], and then click [OK].
- 8** Click [Create].

The following message appears.

- 9** Specify the file location and the name, and then click [Save].
- 10** Specify the file location and the name, and then click [Save].

The printer icon appears on the desktop.

- 11** Quit Desktop Printer Utility.

### Note

- The procedures used to configure Mac OS may vary depending on the Mac OS version. The following describes how to configure Mac OS 9.1. If you are using a different version of Mac OS, use the following procedures as a reference and see the manuals for your Mac OS version.
- Mac OS supports only the standard USB ports for this printer.
- When printing with a USB connection to a Macintosh computer, printer language does not change automatically. Use the control panel on this printer to change printer language to [Auto Detect] or [PS] before printing.

## Changing to EtherTalk

Follow the procedure below to configure to a Mac OS to use EtherTalk.

- 1** Open [Control Panel], and then double-click the AppleTalk icon.
- 2** On the [Connect via:] pop-up menu, click [Ethernet].
- 3** If you change zones, select a name on the [Current zone:] pop-up menu.
- 4** Close the AppleTalk control panel.
- 5** Restart the computer.

### Note

- The procedures used to configure Mac OS may vary depending on the Mac OS version. The following describes how to configure Mac OS 9.1. If you are using a different version of Mac OS, use the following procedures as a reference and see the manuals for your Mac OS version.
- Confirm the Connection to the Printer with TCP/IP

### Reference

For information about installing applications required for EtherTalk, see the Mac OS manuals.

# Mac OS X

This section explains how to configure a Mac OS X to use EtherTalk, USB and TCP/IP.

Follow the procedure below to configure Mac OS X 10.1. If you are not using Mac OS X 10.1, see the manual of the Mac OS X you are using for details.

2

## Important

- For Mac OS X 10.1 or higher.

## Note

- The PPD files are stored in the following folder on the CD-ROM.

**Mac OS X:PPD Installer**

---

## Installing the PPD Files

---

Follow the procedure below to install a PPD file to print from Mac OS X.

## Important

- You need an administrator name and a password (phrase). For details, consult your network administrator.

- 1** Insert the CD-ROM into the CD-ROM drive.
- 2** Double-click the CD-ROM drive icon.
- 3** Double-click the [Mac OS X] folder.
- 4** Double-click the installer icon.
- 5** Follow the instructions on the screen.

---

## Setting Up the PPD File

---

- 1** Start Print Center.

- 2** Click [Add Printer].

Click [AppleTalk] on the first pop-up menu.

If the zone is set, select the zone from the second pop-up menu.

- 3** Select the PPD file for the model you are using from the [Printer Model:] pop-up menu, and then click [Add].

---

## Setting Up Options

---

**Important**

- No printer option settings can be made under Mac OS X. No new settings for options not installed can be made.

---

## Using USB Interface

---

2

Follow the procedure below to setup USB connection.

- 1** Start Print Center.
- 2** Click [Add].
- 3** Click [USB] on the pop-up menu.  
The connected printer appears.
- 4** Select the printer, and then select its manufacturer from the [Printer Model:] pop-up menu.  
A list of printer types appears.
- 5** Select the name of the connected printer from the list of printer models, and then click [Add].
- 6** Close the [Printer List] dialog box, and then quit Print Center.

**Note**

- When printing with a USB connection to a Macintosh computer, printer language does not change automatically. Use the control panel on this printer to change printer language to [**Auto Detect**] or [**PS**] before printing.
- USB2.0 can be used only with Mac OS X 10.3.3 or higher.

## Using Rendezvous

---

Follow the procedure below to print using Rendezvous under Mac OS X 10.2.3 or higher. Ethernet, wireless LAN and IEEE 1394 (IP over 1394) connections can also be used.

2

- 1** Start Print Center.
- 2** Click [Add].
- 3** Click [Rendezvous] on the pop-up menu.  
The connected printer appears.
- 4** Select the printer, and then select its manufacturer from the [Printer Model:] pop-up menu.  
A list of printer types appears.
- 5** Select the name of the connected printer from the list of printer models, and then click [Add].
- 6** Close the [Printer List] dialog box, and then quit Print Center.

 **Note**

- When printing with a Rendezvous connection to a Macintosh computer, printer language does not change automatically. Use the control panel on this printer to change printer language to [**Auto Detect**] or [**PS**] before printing.

---

## Changing to EtherTalk

---

 **Important**

- You need an administrator name and a password (phrase). For details, consult your network administrator

Follow the procedure below to configure a Mac OS X to use EtherTalk.

 **Reference**

For information about installing applications required for EtherTalk, see the Mac OS manuals.

- 1** Open [**System Preference**], and then click the Network icon.
- 2** Click the [**AppleTalk**] tab.
- 3** Select the [**Make AppleTalk Active**] check box.
- 4** To change AppleTalk zones, select a name from the [**AppleTalk Zone:**] pop-up menu.
- 5** When the settings are made, click [**Apple Now**].

# Configuring the Printer

Use the control panel to enable AppleTalk. (The default is active.)



# 3. Using PostScript 3

## Setting Up Options

To use installed options correctly, first set up the printer driver. If the options are not recognized, you cannot use them, even though they are physically installed. The procedure to set up a printer driver varies depending on the operating system.

### Reference

See p.48 "Making Option Settings for the Printer", p.59 "Setting Up Options" or p.65 "Setting Up Options" for the installation method appropriate to your printing environment.

### ❖ Windows

You can set up any of the options using the following tabs:

Windows 95/98/Me	[Options] on the [Accessories] tab.
Windows 2000/XP, Windows Server 2003	[Installable Options] on the [Device Setting] tab.
Windows NT 4.0	[Installable Options] on the [Device Setting] tab in the Properties dialog box.
Mac OS	For ethernet, [Chooser] on the Apple Menu. For USB, [Change Setup] from the [Printing] menu to open the Desktop printer.
Mac OS X	This function is not available.

### Note

- To set up options, access the printer driver from Windows. You cannot set up options if you access the printer driver from an application.

### Limitation

- If your system is Windows 2000, Windows XP Professional, or Windows Server 2003, changing printer driver settings requires Manage Printers permission. Members of Administrators and Power Users groups have Manage Printers permission by default. When you change printer driver settings, log on with an account that has Manage Printers permission.
- If your system is Windows NT 4.0, changing printer driver settings requires Full Control access permission. Members of Administrators, Server Operators, Print Operators, and Power Users groups have Full Control permission by default. When you change printer driver settings, log on with an account that has Full Control permission.
- If you are using Adobe Page Maker 6.0, 6.5, or 7.0 with Windows 95/98/Me/2000/XP, Windows Server 2003, or Windows NT 4.0, you have to set up options in the Adobe PageMaker's print dialog box.

### ❖ Mac OS

You can set up all options using the [Chooser] dialog box.

### Limitation

- If you use Mac OS X, this functions cannot be used.

# Printing a Document

This documentation describes the specific printer functions and menus that are added by installing the PPD file. For more information about the functions and menus of the Windows 95/98/Me PostScript printer driver, see the printer driver's Help.

## Preparation

On a Macintosh, Mac OS 8.6 or later (Mac OS X Classic environment is supported.) or Mac OS X 10.1 or later is required.

3

## Limitation

If you use Mac OS X 10.1.x, the following functions cannot be used:

- Sample Print
- Locked Print
- Document Server
- User Code

## Note

If you use Mac OS X 10.2.x or later, Job Type function can use.

"Mac OS X" in the tables below refers to Mac OS X 10.2.3. Depending on the version, [Features x] is displayed as [Set x] (x is a number). Make adjustments according to the version you use.

## Job Type

Use this to select the type of print job.

The following table shows the tabs or menus where you can select this function.

Windows 95 / 98 / Me	[Job Type:] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Job Type:] on the [Job Log] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Job Type:] on the [Job Log] tab in the Document Defaults dialog box.
Mac OS	[Job Type:] on [Job Log] in the print dialog box.
Mac OS X	[Job Type:] on [Job Log] in the print dialog box.

You can select the following items:

### ❖ Normal

Select this for normal printing. The print job starts immediately after the print command is given.

## Note

Under Windows 95/98/Me, if you want to use an User ID, click the [Details...] button.

## ❖ Sample Print

Use this function to print only one set of a multiple print jobs. The other sets are saved in the machine. The saved job can be printed from the machine's control panel. You can also delete the saved job.

### ● Limitation

- To use this function, the optional Hard Disk Drive must be installed on the printer.
- Applications with their own drivers, such as PageMaker, do not support this function.

### >Note

- The "User ID" can consist of up to eight alphanumeric (a- z, A- Z, 0- 9) characters.
- Entering the "User ID" helps you to distinguish the print job from others.

### Reference

For more information about how to use Sample Print, see p.72 "How to Use Sample Print".

3

## ❖ Locked Print

Use this function to save documents in the machine memory with a password, and then edit and print them as you want.

### ● Limitation

- To use this function, the optional Hard Disk Drive must be installed on the printer.
- Applications with their own drivers, such as PageMaker, do not support this function.

### Note

- The "User ID" can consist of up to eight alphanumeric (a-z, A-Z, 0-9) characters. The "Password" must be 4-8 digits.

### Reference

For more information about how to use Locked Print, see p.79 "How to Use Locked Print".

## ❖ Document Server

Use this function to store hard disk documents that you want to print as well as documents you might want to later combine or process for printing. For more information about the Document Server function, see "Accessing the Document Server", *Printer Reference*.

### ● Limitation

- To use this function, the optional Hard Disk Drive must be installed on the printer.
- Applications with their own drivers, such as PageMaker, do not support this function.

## How to Use Sample Print

---

Follow the procedure below to print a document using the Sample Print function.

---

### Windows 95/98/Me

---

#### Note

- If the application has a collate option, make sure it is not selected before sending a print job. By default, sample print jobs are automatically collated by the printer driver. If the collate option is selected in the application's [Print] dialog box, more prints than intended may be printed.

3

**1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

**2** Select the printer, and then click [Properties].

**3** Click the [Setup] tab.

**4** In the [Job Type:] list, click [Sample Print].

**5** Click [Details...].

**6** In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters.

#### Note

- This is used to identify the user associated with a job.

**7** Click [OK].

**8** Click [OK] to close the printer properties dialog box.

**9** Set the number of copies to two or more, and then start the printing from the application's [Print] dialog box.

The sample print job is sent to the machine and one set is printed.


**10** Check the printed output to make sure the settings are correct.

If the settings are correct, proceed to step **11** to print the remaining sets.

If you want to delete a saved job, see p.85 "Deleting a Locked Print File".

**11** On the machine's control panel, press the [Printer] key to display the printer screen.

**12** Press [Locked & Sample Print Job List].

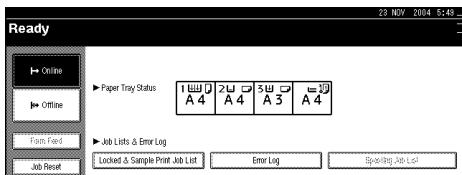

**13** Press [Sample Print Job List].

A list of the sample print files stored in the machine appears.



3

The following items also appear:

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.
- Qty. : The number of remaining sets.

**14** Select the file you want to print by pressing it.

A list of the print files stored in the machine appears.



**Note**

Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.

Only one file can be selected at a time.

**15** Press [Print] to change the number of sets to be printed.

**16** Enter the new number of sets using the number keys.



If you do not want to change the set quantity, proceed to step **13**.



**Note**

You can enter up to 999 sets.

Press [**Clear/Stop**] to correct any entry mistakes.

**17** Press [Yes].

The remaining sets are printed.

 **Note**

- Press [No] to cancel printing.
- When printing is completed, the stored file will be deleted.
- To cancel printing, press [Exit]. After that, press [Job Reset]. After it has started, the file will be deleted.
- If there is a print job outstanding, this will be printed before the sample print job.

3

---

Windows 2000/XP, Windows Server 2003, Windows NT 4.0

---

 **Note**

- If the application has a collate option, make sure it is not selected before sending a print job. By default, sample print jobs are automatically collated by the printer driver. If the collate option is selected in the application's [Print] dialog box, more prints than intended may be printed.

**1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

**2** Select the printer, and then click [Properties].

 **Note**

- Under Windows 2000, select the printer, and then proceed to step **3**.
- Under Windows XP and Windows Server 2003, select the printer, and then click [Preferences].

**3** Click the [Job Log] tab.

**4** In the [Job Type:] list, click [Sample Print].

**5** In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters.

 **Note**

- This is used to identify the user associated with a job.

**6** Click [OK] to close the printer properties dialog box.

 **Note**

- Under Windows 2000, proceed to step **7**.

**7** Set the number of copies to two or more, and then start the printing from the application's [Print] dialog box.

The sample print job is sent to the machine, and one set is printed.


## 8 Check the printed output to make sure the settings are correct.

If the settings are correct, proceed to step 9 to print the remaining sets.

If you want to delete a saved job, see p.85 "Deleting a Locked Print File".

## 9 On the machine's control panel, press the [Printer] key to display the printer screen.

## 10 Press [Locked & Sample Print Job List].

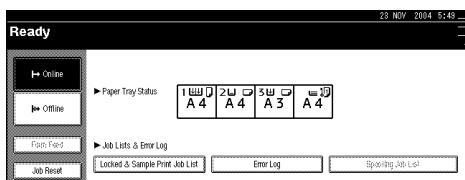

3

## 11 Press [Sample Print Job List].

A list of the sample print files stored in the machine appears.



The following items also appear:

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.
- Qty.: The number of remaining sets.

## 12 Select the file you want to print by pressing it.


A list of the print files stored in the machine appears.

### Note

- Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.
- Only one file can be selected at a time.

## 13 Press [Print] to change the number of sets to be printed.

## 14 Enter the new number of sets using the number keys.

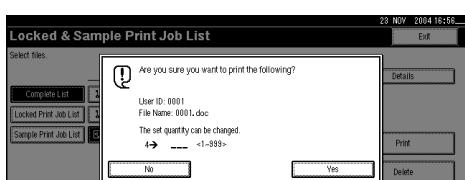

If you do not want to change the set quantity, proceed to step 15.

### Note

- You can enter up to 999 sets.
- Press [**Clear/Stop**] to correct any entry mistakes.

**15** Press [Yes].

The remaining sets are printed.

 **Note**

- Press [No] to cancel printing.
- When printing is completed, the stored file will be deleted.
- To cancel printing, press [Exit]. After that, press [Job Reset]. After it has started, the file will be deleted.
- If there is a print job outstanding, this will be printed before the sample print job.

3

---

## Mac OS/Mac OS X

---

 **Limitation**

- If you use Mac OS X 10.1.x, this function cannot be used.

 **Note**

- If you use Mac OS X 10.2.x or later, Job Type function can use.

**1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

**2** Set the number of copies to two or more.

The sample print job is sent to the machine, and one set is printed.

**3** In the pop-up menu, click [Job Log].

**4** On the [Job Type:] pop-up menu, select the appropriate setting.

**5** In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters.

 **Note**

- This is used to identify the user associated with a job.


**6** Check the printed output to make sure the settings are correct.

If the settings are correct, proceed to step **7** to print the remaining sets.

If you want to delete a saved job, see p.85 "Deleting a Locked Print File".

**7** On the machine's control panel, press the [Printer] key to display the printer screen.

**8** Press [Locked & Sample Print Job List].

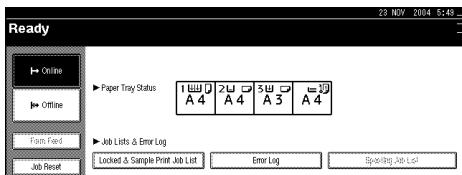

**9** Press [Sample Print Job List].

A list of the sample print files stored in the machine appears.



3

The following items also appear:

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.
- Qty. : The number of remaining sets.

**10** Select the file you want to print by pressing it.

A list of the print files stored in the machine appears.




**Note**

Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.

Only one file can be selected at a time.

**11** Press [Print] to change the number of sets to be printed.

**12** Enter the new number of sets using the number keys.

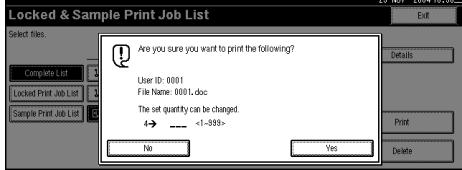

If you do not want to change the set quantity, proceed to step **13**.



**Note**

You can enter up to 999 sets.

Press [**Clear/Stop**] to correct any entry mistakes.

**13** Press [Yes].

The remaining sets are printed.

 **Note**

- Press [**No**] to cancel printing.
- When printing is completed, the stored file will be deleted.
- To cancel printing, press [**Exit**]. After that, press [**Job Reset**]. After it has started, the file will be deleted.
- If there is a print job outstanding, this will be printed before the sample print job.

3

---

## Deleting a Sample Print File

---

If the printed document is not as you expected, you can delete the sample print file.

**1** On the machine's control panel, press the [**Printer**] key to display the printer screen.

**2** Press [**Locked & Sample Print Job List**].

A list of the print files stored appears.

**3** Press [**Sample Print Job List**].

A list of sample print files stored appears.

**4** Select the file you want to delete by pressing it.

 **Note**

- Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.
- To cancel a selection, press the highlighted file again.
- Only one file can be selected at a time.

**5** Press [**Delete**].

A delete confirmation screen appears.

**6** Press [**Yes**] to delete the file.

After the file has been deleted the printer screen reappears.

 **Note**

- Press [**No**] to cancel the delete request.

## How to Use Locked Print

Follow the procedure below to print a document using the Locked Print function.

### Windows 95/98/Me

- 1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

- 2** Select the printer, and then click [Properties].

- 3** Click the [Setup] tab.

- 4** In the [Job Type:] list, click [Locked Print].

- 5** Click [Details...].

- 6** In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters, and then enter 4-8 digit password in the [Password:] box.

 **Note**

This is used to identify the user associated with a job.

- 7** Click [OK].

- 8** Click [OK] to close the printer properties dialog box.

- 9** After making the necessary settings, click [OK] to close the [Print] dialog box.


The document file is saved in the machine.

If you want to print the document, proceed to step **10**.

If you want to delete the document, see p.85 "Deleting a Locked Print File".

- 10** On the machine's control panel, press the [Printer] key to display the printer screen.

- 11** Press [Locked & Sample Print Job List].

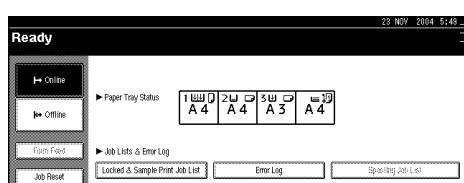

A list of the print files stored in the machine appears.

**12** Press [Locked Print Job List].

A list of stored locked print files appears.



The following items also appear:

**3**

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.

**13** Select the file you want to print by pressing it.

**Note**

- Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.
- Only one file can be selected at a time.

**14** Press [Print].

The password screen appears.



**15** Enter the password using the number keys, and then press [OK].

The print confirmation screen appears.

**Note**

- A confirmation screen will appear if the password is not entered correctly. Press [OK] to enter the password again.

**16** Press [Yes].

The locked file is printed.

**Note**

- Press [No] to cancel printing.
- To cancel printing, press [Exit]. After that, press [Job Reset]. After it has started, the file will be deleted.

---

Windows 2000/XP, Windows Server 2003, Windows NT 4.0

---

**1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

**2** Select the printer, and then click [Properties].

 **Note**

- Under Windows 2000, select the printer, and then proceed to step **3**.
- Under Windows XP and Windows Server 2003, select the printer, and then click [Preferences].

**3**

**3** Click the [Job Log] tab.

**4** In the [Job Type:] list, click [Locked Print].

**5** In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters, and then enter 4-8 digit password in the [Password:] box.

 **Note**

- This is used to identify the user associated with a job.

**6** Click [OK] to close the printer properties dialog box.

 **Note**

- Under Windows 2000, proceed to step **7**.

**7** Start the printing from the application's [Print] dialog box.


The document file is saved in the machine.

If you want to print the document, proceed to step **8**.

If you want to delete the document, see p.85 "Deleting a Locked Print File".

**8** On the machine's control panel, press the [Printer] key to display the printer screen.

**9** Press [Locked & Sample Print Job List].

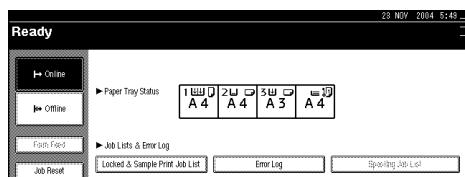

A list of the print files stored in the machine appears.

**10** Press [Locked Print Job List].

A list of stored locked print files appears.



The following items also appear:

**3**

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.


**11** Select the file you want to print by pressing it.

**Note**

- Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.
- Only one file can be selected at a time.

**12** Press [Print].

The password screen appears.

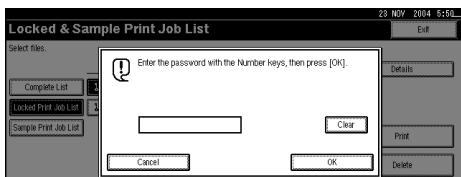

**13** Enter the password using the number keys, and then press [OK].

The print confirmation screen appears.

**Note**

- A confirmation screen will appear if the password is not entered correctly. Press [OK] to enter the password again.

**14** Press [Yes].

The locked file is printed.

**Note**

- Press [No] to cancel printing.
- To cancel printing, press [Exit]. After that, press [Job Reset]. After it has started, the file will be deleted.

## Mac OS/Mac OS X

### ! Limitation

If you use Mac OS X 10.1.x, this function cannot be used.

### >Note

If you use Mac OS X 10.2.x or later, Job Type function can use.

### 1 From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

### 2 In the pop-up menu, click [Job Log].

### 3 On the [Job Type:] pop-up menu, click [Locked Print].

### 4 In the [User ID:] box, enter the user ID using up to eight alphanumeric (a-z, A-Z, 0-9) characters, and then enter 4-8 digit password in the [Password:] box.

### Note

This is used to identify the user associated with a job.

### 5 After making the necessary settings, click [Print].


The document file is saved in the machine.

If you want to print the document, proceed to step 6.

If you want to delete the document, see p.85 "Deleting a Locked Print File".

### 6 On the machine's control panel, press the [Printer] key to display the printer screen.

### 7 Press [Locked & Sample Print Job List].

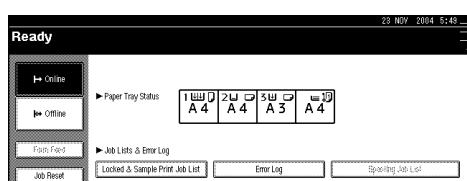

A list of the print files stored in the machine appears.

**8** Press [Locked Print Job List].

A list of stored locked print files appears.



The following items also appear:

3

- User ID: The user ID set up by the printer driver.
- Date / Time: The date and time when the job was sent from the computer.


**9** Select the file you want to print by pressing it.

**Note**

- Press [**▲ Prev.**] or [**▼ Next.**] to scroll through the list.
- Only one file can be selected at a time.

**10** Press [Print].

The password screen appears.

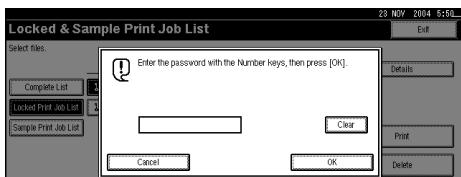

**11** Enter the password using the number keys, and then press [OK].

The print confirmation screen appears.

**Note**

- A confirmation screen will appear if the password is not entered correctly. Press [OK] to enter the password again.

**12** Press [Yes].

The locked file is printed.

**Note**

- Press [No] to cancel printing.
- To cancel printing, press [Exit]. After that, press [Job Reset]. After it has started, the file will be deleted.

---

## Deleting a Locked Print File

---

If the printed document is not as you expected, you can delete the locked print file.

- 1** On the machine's control panel, press the **[Printer]** key to display the printer screen.
- 2** Press **[Locked & Sample Print Job List]**.  
A list of the print files stored appears.
- 3** Press **[Locked Print Job List]**.  
A list of locked print files stored appears.
- 4** Select the file you want to delete by pressing it.

 **Note**

- Press **[▲ Prev.]** or **[▼ Next.]** to scroll through the list.
- To cancel a selection, press the highlighted file again.
- Only one file can be selected at a time.

- 5** Press **[Delete]**.

The password screen is appears.

- 6** Enter the password using the number keys, and then press **[OK]**.

A delete confirmation screen appears.

 **Note**

- The confirmation screen will reappear if the password was entered incorrectly. Press **[OK]** to enter the password again.

- 7** Press **[Yes]**.

After the file has been deleted, the printer screen reappears.

 **Note**

- Press **[No]** to cancel the delete request.

3

## How to Use Document Server

---

Follow the procedure below to print a document using the Document Server function.

### Note

- An optional hard disk drive is required to use the Document Server function.
- 

### Windows 95/98/Me

---

3

- 1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

- 2** Select the printer, and then click [Properties].

- 3** Click the [Setup] tab.

- 4** In the [Job Type:] list, click [Document Server].

- 5** Click [Details...].

- 6** Enter a user ID, file name, and password in the dialog box that appears. The file name and password are optional.

- 7** Click [OK].

- 8** Start the printing from the application's [Print] dialog box.
- 

### Windows 2000/XP, Windows Server 2003, Windows NT 4.0

---

- 1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

- 2** Select the printer, and then click [Properties].

### Note

- Under Windows 2000, select the printer, and then proceed to step **3**.
- Under Windows XP and Windows Server 2003, select the printer, and then click [Preferences].

- 3** Click the [Job Log] tab.

- 4** In the [Job Type:] list, click [Document Server].

- 5** Enter a user ID, file name, and password in the dialog box that appears. The file name and password are optional.

**6** Click [OK]. **Note**

Under Windows 2000, proceed to step **7**.

**7** Start the printing from the application's [Print] dialog box.**Mac OS/Mac OS X** **Limitation**

If you use Mac OS X 10.1.x, this function cannot be used.

3

 **Note**

If you use Mac OS X 10.2.x or later, Job Type function can use.

**1** From an application, click [Print] on the [File] menu.

The [Print] dialog box appears.

**2** In the pop-up menu, click [Job Log].**3** On the [Job Type:] pop-up menu, click [Document Server].

**4** Enter a user ID, file name, and password in the dialog box that appears. The file name and password are optional.

**5** Start the printing from the application's [Print] dialog box.**User Code**

Use this to set a user code for print logging.

Enter a user code using up to eight digits. A user code identifies a group of users and allows you to check the number of sheets printed under each code with SmartDeviceMonitor for Admin.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[User Code] on the [Statistics] tab.
Windows 2000/XP, Windows Server 2003	[User Code:] on the [Job Log] tab in the Printing Preferences dialog box.
Windows NT 4.0	[User Code:] on the [Job Log] tab in the Document Defaults dialog box.
Mac OS	[User Code:] on [Job Log] in the print dialog box.
Mac OS X	[User Code] on [Job Log] in the print dialog box.

 **Reference**

For more information about using SmartDeviceMonitor for Admin, see Help.

## Paper Selection

---

### All Pages and Destination Tabs

---

Use this to select the media type and input tray.

#### Limitation

This function is for Windows 95/98/Me only.

3

#### Reference

For more information about the **[All Pages]** and **[Destination]** tabs. See the printer driver's Help.

## Paper Size

---

Use this to select the size of paper you want to use.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	<b>[Size:]</b> on the <b>[Paper]</b> tab.
Windows 2000/XP, Windows Server 2003	<b>[Paper Size:]</b> on <b>[Paper/Output]</b> on <b>[Advanced...]</b> on the <b>[Paper/Quality]</b> tab in the Printing Preference dialog box.
Windows NT 4.0	<b>[Paper Size:]</b> on the <b>[Page Setup]</b> tab in the Document Defaults dialog box.
Mac OS	<b>[Paper:]</b> on the <b>[Page Attributes]</b> tab in the Page Setup dialog box.
Mac OS X	<b>[Paper Size:]</b> in the Page Setup dialog box.

#### Reference

For more information about the paper sizes supported by this machine, see *General Setting Guide*.

## Fit to Paper

When the size of the document and paper size differ, set whether or not to print according to paper size.

Windows 95/98/Me	[Fit to Print Size:] on the [Paper] tab.
Windows 2000/XP, Windows Server 2003	[Fit to Paper] on [Printer Features] on [Document Options] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Fit to Paper] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Fit to Paper:] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Fit to Paper:] on the [Features x] tab on [Printer Features] in the print dialog box.

### ❖ Prompt User

Print is performed with the size of document to be printed unchanged.

### ❖ Nearest Size and Scale

If the paper size is smaller than the selected paper size, the driver reduces the print size.

If the paper size is larger than the size of document to be printed, print is not to fit the paper size.

### ❖ Nearest Size and Crop

When the paper size is smaller than the size of document to be printed, print is adjusted to meet the paper size.

## Input Slot

Use this to select the paper sources.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Input Tray:] on [All Pages] on the [Paper] tab.
Windows 2000/XP, Windows Server 2003	[Paper Source] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	The [Page Setup] tab in the Document Defaults dialog box.
Mac OS	[Paper Source:] on [General] in the print dialog box.
Mac OS X	[Paper Feed] in the print dialog box.

## Reference

For more information about the paper sources, see *Printer Reference*.

## Resolution

Use this to set the resolution types.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Resolution] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Resolution] on [Graphic] on the [Paper/Quality] or [Layout] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Graphic] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Resolution] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Resolution] on the [Features x] tab on [Printer Features] in the print dialog box.

### Reference

For more information about the resolution types, see *Printer Reference*.

## Print Mode (Toner Saving)

Use this function to reduce the amount of toner used when printing.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Toner Saving] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Print Mode:] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Print Mode:] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Print Mode:] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Print Mode:] on the [Features x] tab on [Printer Features] in the print dialog box.

### Reference

For more information about this function, see *Printer Reference*.

## Duplex Printing

Use this function to select duplex printing.

### ◆ Limitation

- To use this function, the optional duplex unit must be installed on the machine.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Duplex:] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Print on Both Sides (Duplex)] on the [Layout] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Print on Both Sides (Duplex Printing)] on the [Page Setup] tab in the Document Defaults dialog box.
Mac OS	[Print on Both Sides] on [Layout] in the print dialog box.
Mac OS X	The [Print on both Sides] check box on [Duplex:] in the print dialog box.

You can select the following items: The following items may vary depending on the operating system you are using.

### Windows 95/98/Me

#### ◆ Off

Disables Duplex Printing.

#### ◆ Open to Left

Prints output so that you can open it to the left.

#### ◆ Open to Top

Prints output so that you can open it to the top.

### Windows 2000/XP, Windows Server 2003, Mac OS, Mac OS X

#### ◆ Note

- If you use a Mac OS, click to select the button that means "Flip on Long Edge" or "Flip on Short Edge".

#### ◆ None

Disables Duplex Printing.

#### ◆ Flip on Short Edge

Prints output so that you can open it to the short edge when bound along the short edge.

#### ◆ Flip on Long Edge

Prints output so that you can open it to the long edge when bound along the long edge.

## Windows NT 4.0

---

### ◆ None

Disables Duplex Printing.

### ◆ Short Side

Prints output so that you can open it to the short edge when bound along the short edge.

### ◆ Long Side

3

Prints output so that you can open it to the long edge when bound along the long edge.

---

## Gradation

---

Use this to select a type of gradation based on your purpose.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Gradation] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Gradation] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Gradation] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Gradation] on the [Features x] tab on [Printer Features] in the print dialog box.

## Reference

For more information about the gradation types, see *Printer Reference*.

## Collate

Use this function to enable collation. With this feature, the machine can efficiently print collated sets of multiple-page documents.

### • Limitation

- To use this function, a memory unit of at least 192 MB or hard disk drive must be installed on the machine.
- If you use Windows 2000, Windows XP, Mac OS or Mac OS X, make sure that the following check boxes have not been selected.
  - Windows 2000  
The **[Collate]** check box on **[Printer Features]** on **[Advanced...]** on the **[Paper/ Quality]** tab in the Printing Preferences dialog box.
  - Windows XP  
The **[Collate]** check box on **[Paper/Output]** on **[Advanced...]** on the **[Paper/ Quality]** tab in the Printing Preferences dialog box.
  - Mac OS  
The **[Collate]** check box in the print dialog box.
  - Mac OS X  
The **[Collate]** check box on **[Copies & Pages]** in the printer dialog box.

3

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	The <b>[Setup]</b> tab.
Windows 2000, Windows XP	<b>[Collate:]</b> on <b>[Printer Features]</b> on <b>[Advanced...]</b> on the <b>[Paper/Quality]</b> tab in the Printing Preferences dialog box.
Windows NT 4.0	<b>[Collate:]</b> on <b>[Printer Features]</b> on <b>[Document Options]</b> on the <b>[Advanced]</b> tab in the Document Defaults dialog box.
Mac OS	<b>[Collate:]</b> on <b>[Printer Specific Options]</b> in the print dialog box.
Mac OS X	<b>[Collate:]</b> on the <b>[Feature 1]</b> tab on <b>[Printer Feature]</b> in the printer dialog box.

## Paper Type

Use this to select the paper type.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Type:] on [All Pages] on the [Paper] tab.
Windows 2000/XP, Windows Server 2003	[Media:] on the [Paper/Quality] tab in the Printing Preference dialog box.
Windows NT 4.0	[Paper/Output] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Paper Type:] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Paper Type] on the [Features x] tab on [Printer Features] in the print dialog box.

### Reference

For more information about the media type supported by this machine, see *General Setting Guide*.

## Destination Tray

The following table shows where you can select this function.

Windows 95/98/Me	[Output Tray:] in [Destination] on the [Paper] tab.
Windows 2000/XP, Windows Server 2003	[Destination] in [Printer Features] on [Advanced...] on the [Paper/Quality] or [Layout] tab.
Windows NT 4.0	[Destination] in [Printer Features] on [Document Options] on the [Advanced] tab.
Mac OS	[Destination] in [Printer Specific Options] in the print dialog box.
Mac OS X	[Destination] on the [Features x] tab in [Printer Features] in the print dialog box.

### Reference

For more information about the destination tray supported by this machine, see *General Setting Guide*.

## Staple

Use this function to staple sheets of printed paper together.

### ● Limitation

- When stapling, use the finisher option. See *General Setting Guide* or *Printer Reference*.

### >Note

- The stapling location might differ depending on the orientation of the machine set in the printer and the orientation of the data to be printed. For details, see *Printer Reference*.

The following table shows where you can select this function.

Windows 95/98/Me	[Staple] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Staple] in [Printer Features] on [Advanced...] on the [Paper/Quality] or [Layout] tab.
Windows NT 4.0	[Staple] in [Printer Features] on [Document Options] on the [Advanced] tab.
Mac OS	[Staple] in [Printer Specific Options] in the print dialog box.
Mac OS X	[Staple] on the [Features x] tab in [Printer Features] in the print dialog box.

## Punch

Use this function to punch holes in the printed documents.

### ● Limitation

- When punching holes, use the finisher option. See *Printer Reference*.

### Note

- Punch positions and the number of punch holes that are available will change depending on the type of finisher, the original's orientation, and the printing paper size and orientation. For details, see *Printer Reference*.

The following table shows where you can select this function.

Windows 95/98/Me	[Punch] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Punch] in [Printer Features] on [Advanced...] on the [Paper/Quality] or [Layout] tab.
Windows NT 4.0	[Punch] in [Printer Features] on [Document Options] on the [Advanced] tab.
Mac OS	[Punch] in [Printer Specific Options] in the print dialog box.
Mac OS X	[Punch] on the [Features x] tab in [Printer Features] in the print dialog box.

## Z-fold

Use this function to select the Z-fold type in the printed documents.

### Limitation

- When Z-fold, use the finisher option. See *Printer Reference*.

The following table shows where you can select this function.

Windows 95/98/Me	[Z-fold] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Z-fold] in [Printer Features] on [Advanced...] on the [Paper/Quality] or [Layout] tab.
Windows NT 4.0	[Z-fold] in [Printer Features] on [Document Options] on the [Advanced] tab.
Mac OS	[Z-fold] in [Printer Specific Options] in the print dialog box.
Mac OS X	[Z-fold] on the [Features x] tab in [Printer Features] in the print dialog box.

## Watermark

Set the Watermark function.

### Note

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark:] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark:] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Watermark Text

Select the Watermark Text type.

### Note

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark Text] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark Text] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Watermark Font

Select the Watermark Font type.

 **Note**

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark Font] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark Font] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Watermark Size

Select the Watermark size.

 **Note**

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark Size] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark Size] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Watermark Angle

Select the Watermark angle.

 **Limitation**

- This item is only for portrait, not for landscape.

 **Note**

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark Angle] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark Angle] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Watermark Style

Select the Watermark style.

 **Note**

- When using this function under Windows 95/98/Me, Mac OS, or Mac OS X, see the printer driver Help. The following explains the procedure for Windows 2000/XP, Windows Server 2003, and Windows NT 4.0.

Windows 2000/XP, Windows Server 2003	[Watermark Style] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Watermark Style] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.

## Color Mode

Use this to select whether the document is printed in color or black and white. The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Color/ Black and White:] on the [Setup] tab.
Windows 2000/XP, Windows Server 2003	[Color Mode] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Color Mode] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Color Mode] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Color Mode] on the [Features x] tab on [Printer Features] in the print dialog box.

### Note

- If you use Windows 95/98/Me, this mode is called "Color/ Black and White:". You can select the following items:

#### ❖ Color

Prints color documents in full color.

### Note

- Color images will be printed using CMYK toner, Cyan, Magenta, Yellow and Black. CMYK are three primary subtractive colors.
- If you want to adjust the print color, adjust the settings in the Advanced dialog box accessed from the Advanced button on the [Paper/Quality] tab.

#### ❖ Black and White

Prints everything, including color documents, in black and white. Black and White printing is faster than Color printing. To stop black and white areas being printed with CMYK toner, select [Black and White] in the printer driver as well as in the application.

## Color Setting

Use this to select the correction method used for color conversion.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Color Setting:] on the [Advanced] window displayed when clicking [Advanced...] after selecting [Manual] on [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Color Setting] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Color Setting] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Color Setting] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Color Setting] on the [Features x] tab on [Printer Features] in the print dialog box.

### Important

- If you use Windows 95/98/Me, you can configure [Color Setting:] in [Advanced] by selecting [Manual] from the [Color] setting. [Automatic] sets the printer to "Super Fine".

### Note

- The color rendering dictionary that is selected in the "Color Profile" setting is used.

You can select the following items:

#### ◆ Off

No modification to the color setting.

#### ◆ Fine

Select this setting to perform color matching based on one of the printer's built-in color rendering dictionaries and perform CMYK conversion. This setting performs the printing which output target is Monitor  $\gamma = 1.8$ .

#### ◆ Super Fine

Select this setting to use a color rendering dictionary as in the "Fine" setting but produce output that is more vivid. Use this setting to emphasize light colors. This setting performs the printing which output target is Monitor  $\gamma = 2.2$ .

### Note

- Use this to select a color rendering dictionary (CRD). The CRD is referred to color matching, so you should select the appropriate CRD for the document you are printing. The selected CRD is also referred to when [Fine] or [Super Fine] is selected for "Color Setting". The following items are available: [Auto], [Photographic], [Presentation] and [Solid Color].

## Color Profile

Use this to select the color profile pattern.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Color Profile:] in the [Advanced] dialog box displayed when you click [Advanced...], after selecting [Manual] from [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Color Profile] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Color Profile] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Color Profile] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Color Profile] on the [Features x] tab on [Printer Features] in the print dialog box.

You can select the following items:

### Important

- If you use Windows 95/98/Me, you can configure [Color Profile:] in [Advanced] by selecting [Manual] from the [Color] setting. [Automatic] sets the printer to "Auto".

### ◆ Auto

Use this setting to configure the best color profile pattern automatically depending on the appearance of the document to be printed.

### ◆ Photographic

Use this setting to enhance the reproduction of photos and graphics that include midtones.

### ◆ Presentation

Use this setting to enhance the reproduction of documents that contain text and graphics. This CRD is best for printing colored charts, graphs, presentation materials and so on. If you use this CRD for printing photographs, the color or gradations might not be reproduced well.

### ◆ Solid Color

Use this setting to print specific colors, logos and so on.

### ◆ User Setting

Use this setting to print images with downloaded CRD from your application.

### ◆ CLP Simulation1

Use this setting to print blue color more brightly and vividly.

### ❖ CLP Simulation2

Use this setting to print blue color more brightly and vividly. Print results are lighter than those of CLP Simulation1.

#### Note

- Use this to select a color rendering dictionary (CRD). The CRD is referred to color matching, so you should select the appropriate CRD for the document you are printing. The selected CRD is also referred to when [Fine] or [Super Fine] is selected for "Color Setting". The following items are available: [Auto],[Photographic], [Presentation] and [Solid Color].

3

## Black Over Print

Select whether or not to apply a black color over any other colors when printing. The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Black Over Print] in [Advanced] by selecting [Manual] from the [Color] setting.
Windows 2000/XP, Windows Server 2003	[Black Over Print] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Black Over Print] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Black Over Print] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Black Over Print] on the [Features x] tab on [Printer Features] in the print dialog box.

## Gray Reproduction

Use this to select the Black Color mode for text and line art.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Gray Reproduction (Text/Line Art):] in [Advanced] by selecting [Manual] from the [Color] setting. [Automatic] sets the printer to "Pure Black Text".
Windows 2000/XP, Windows Server 2003	[Gray Reproduction (Text/Line Art)] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Gray Reproduction (Text/Line Art)] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Gray Reproduction (Text/Line Art)] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Gray Reproduction (Text/Line Art)] on the [Features x] tab on [Printer Features] in the print dialog box.

You can select the following items:

❖ **Black by K**

Select this setting to use a black toner.

❖ **Black/Gray by K**

Black portions are printed in gray.

❖ **CMY+K**

Select this setting to use all toners.

## Dithering

Use this to set the Image Rendering mode.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Dithering:] in the [Advanced] dialog box displayed when you click [Advanced...], after selecting [Manual] from [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Dithering:] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Dithering:] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Dithering:] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Dithering:] on the [Features x] tab on [Printer Features] in the print dialog box.

 **Important**

If you use Windows 95/98/Me, you can configure [Dithering:] in [Advanced] by selecting [Manual] from [Color] setting. [Automatic] sets the printer to "Auto".

You can select the following items:

❖ **Auto**

Use this setting to configure the best dithering method automatically depending on the appearance of the document to be printed.

❖ **Photographic**

Performs dithering using an appropriate pattern for photographs.

❖ **Text**

Performs dithering using an appropriate pattern for text.

❖ **User Setting**

Use this setting to print images set in half tone in your application.

## CMYK Simulation Profile

You can simulate the color tone of the printing ink. You can select the printing ink from US OffsetPrint, Euroscale and JapanColor.

Windows 95/98/Me	[CMYK Simulation Profile] in the [Advanced] dialog box displayed when you click [Advanced...], after selecting [Manual] from [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[CMYK Simulation Profile] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[CMYK Simulation Profile] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[CMYK Simulation Profile] on [Printer Specific Options] in the print dialog box.
Mac OS X	[CMYK Simulation Profile] on the [Features x] tab on [Printer Features] in the print dialog box.

## Image Smoothing

Use this to select the image smoothing type.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	[Image Smoothing] in the [Advanced] dialog box displayed when you click [Advanced...], after selecting [Manual] from [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Image Smoothing] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Image Smoothing] on [Printer Features] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Image Smoothing] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Image Smoothing] on the [Features x] tab on [Printer Features] in the print dialog box.

### ❖ Off

Disables image smoothing.

### ❖ On

Performs image smoothing unconditionally.

### ❖ Auto

Performs image smoothing automatically for images that have a resolution less than 25% of supported printer resolution.

### ❖ Less than 90 ppi - Less than 300 ppi

Performs image smoothing only when the image has an image resolution (pixels per inch) less than the respective value you have selected in the list.

#### Note

- When [Auto] is selected, data processing may take a long time.
- When Image Smoothing is used for a mask image, this function may have an undesired effect on the print result.

## Color Control

3

Use this to select whether or not you want the colors in the documents to be adjusted before printing so that the printed page matches closer to the colors on the screen.

The following table shows the tabs or menus where you can select this function.

Windows 95/98/Me	The [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Graphic] on [Advanced] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	This function is not available.
Mac OS	[Color] on the [Color Matching] tab in the print dialog box.
Mac OS X	This function is not available.

#### Note

- If you use Windows 2000/XP or Windows Server 2003, this function is called "Image Color Management".
- If you use Windows NT 4.0, this function can not be configured.
- If you use Mac OS, this function is called "Color Matching".

### ❖ Image Color Control

Display the Image Color Matching dialog box, click this button to specify exactly how you want the colors on your screen adjusted before printing.

## Separate into CMYK

Use this to select the print separation type. You can separate the printing data into CMYK to specify a specific color combination.

Windows 95/98/Me	[Separate into CMYK:] in the [Advanced] dialog box displayed when you click [Advanced...], after selecting [Manual] from [Color] on the [Print Quality] tab.
Windows 2000/XP, Windows Server 2003	[Separate into CMYK] on [Printer Features] on [Advanced...] on the [Paper/Quality] tab in the Printing Preferences dialog box.
Windows NT 4.0	[Separate into CMYK] on [Document Options] on the [Advanced] tab in the Document Defaults dialog box.
Mac OS	[Separate into CMYK] on [Printer Specific Options] in the print dialog box.
Mac OS X	[Separate into CMYK] on the [Features x] tab on [Printer Features] in the print dialog box.

# 4. Printer Utility for Mac

By using Printer Utility for Mac, you can download fonts, change the name of the printer and so on.

## ! Limitation

- If a Macintosh and printer are connected by USB, you cannot use Printer Utility for Mac.

## >Note

- Printer Utility for Mac is included on the CD-ROM labeled "Printer Drivers and Utilities".
- Printer Utility for Mac requires Mac OS 8.1 or later. (Mac OS X Classic environment is supported.)
- Printer Utility for Mac cannot use Mac OS X (native mode).

## Installing Printer Utility for Mac

Follow these steps to install Printer Utility for Mac on the machine.

**1 Start the Mac OS.**

**2 Insert the CD-ROM into the CD-ROM drive.**

The CD-ROM icon appears.

**3 Double-click the icon of hard disk to open it.**

**4 Double-click the CD-ROM icon.**

The contents of the CD-ROM appear.

**5 Double-click the [Mac OS] folder.**

**6 Double-click the [PS Utility] folder on the CD-ROM, and then drag the [Printer Utility for Mac] file, and then drop it into the Macintosh hard disk.**

**7 Drag the CD-ROM icon and drop it into [Trash] to eject the CD-ROM.**

Printer Utility for Mac is installed.

# Starting Printer Utility for Mac

The following instructions describe how to start Printer Utility for Mac.

## Important

- Before starting Printer Utility for Mac, confirm that the printer is selected with [Chooser] on the Apple menu.

### **1 Double-click the Printer Utility for Mac icon.**

The Printer Utility for Mac dialog box appears.

### **2 Click [OK].**

Printer Utility for Mac will take a few seconds to start.

4

## Reference

For more information, see “Printer Utility for Mac Functions”.

# Printer Utility for Mac Functions

Printer Utility for Mac functions are described below.

## ❖ File menu

- **[Download PS Fonts...]**  
Download fonts (PostScript Type 1) to the printer. See p.110 “Downloading PS Fonts”.
- **[Display Printer's Fonts...]**  
Display and delete the fonts in printer memory and the printer's hard disk drive. See p.111 “Displaying Printer's Fonts”.
- **[Initialize Printer's Disk...]**  
Initialize the printer's hard disk drive. See p.112 “Initializing the Printer Disk”.
- **[Page Setup...]**  
Set up the paper size to print “Printer Font Catalog” and “Printer Font Sample”. See p.112 “Page Setup”.
- **[Print Font Catalog...]**  
Print the names of available fonts. See p.112 “Printing Font Catalog”.
- **[Print Font Sample...]**  
Print a sample of fonts. See p.113 “Printing Font Sample”.
- **[Rename Printer...]**  
Change the printer's name when viewed via Appletalk. See p.113 “Renaming the Printer”.
- **[Restart Printer]**  
Restart the printer. See p.114 “Restarting the Printer”.

4

## ❖ Utility menu

- **[Download PostScript File...]**  
Download a PostScript File. See p.114 “Downloading PostScript Files”.
- **[Select Zone...]**  
Change the zone to which the printer belongs to via Appletalk. See p.115 “Selecting the Zone”.
- **[Display Printer Status...]**  
Display the status of the printer. See p.115 “Displaying the Printer Status”.
- **[Launch Dialogue Console...]**  
Create and edit a PostScript file, and then download it to the printer. See p.116 “Launching the Dialogue Console”.

## Downloading PS Fonts

You can download the PS fonts to the printer's memory or hard disk drive.

### Important

- The following procedures to download the fonts assume that you are a system administrator. If you are not, be sure to consult your system administrator.
- If the printer restarts, all the printer settings return to their defaults.
- Confirm that a Mac OS and the printer are connected with Appletalk.

### Note

- Some fonts cannot be downloaded.
- Before downloading, read the documentation about the fonts you want to use.

4

**1** Select [Download PS Fonts...] on the [File] menu.

**2** Click [Add to list].

The dialog box to select fonts appears.

**3** Click to select the desired font files, and then click [Open].

The list of selectable font names appears.

**4** After adding all the fonts you want to download, click [OK].

The dialog box of selected fonts to download appears.

**5** Click [Download].

The fonts begin to download, and the download status is shown.

### Important

- During the download, do not turn off the power switch, operate the panel or open or close the cover.

**6** When the completion message appears, click [OK].

**7** Click [Cancel].

---

## Displaying Printer's Fonts

---

You can display the available fonts currently downloaded to the printer. Fonts in the printer's memory and hard disk drive can be displayed.

 **Note**

The fonts displayed in italics are the default fonts.

**1** Select [Display Printer's Fonts...] on the [File] menu.

A dialog box appears.

**2** Select [Printer's memory] or [Printer's disk].

**3** Click [OK].

4

---

## Deleting Fonts

---

You can delete fonts from the printer's memory or hard disk drive.

**1** Select [Display Printer's fonts] on the [File] menu.

A dialog box appears.

**2** Select [Printer's memory] or [Printer's disk].

**3** Select the fonts you want to delete.

 **Limitation**

You cannot delete the fonts displayed in italic.

**4** Click [Delete].

A confirmation message appears.

**5** Confirm the fonts you want to delete and the printer name from which you want to delete the fonts.

**6** Click [Continue], and then click [OK].

**7** Click [OK].

## Initializing the Printer Disk

---

When initializing the printer's hard disk drive, all the fonts downloaded to the printer's hard disk drive are deleted. Before initializing, be sure to check the fonts on the hard disk drive.

### Important

- When initializing the printer's hard disk drive from the operation panel, all of the data on the printer's hard disk drive is deleted. Before initializing, be sure to check the data on the hard disk drive.

### **1 Select [Initialize Printer's Disk...] on the [File] menu.**

The confirmation message appears.

4

### Note

- To cancel initialization, click [**Cancel**].

### **2 Click [Execute].**

Initializing starts.

### Important

- Do not turn off the power switch until initializing is completed, otherwise the hard disk drive might be damaged.

### **3 When the completion message appears, click [OK].**

---

## Page Setup

---

You can set the paper size on which to print "Print Fonts Catalogue" and "Prints Fonts Sample".

### **1 Select [Page Setup...] on the [File] menu.**

### **2 Choose the paper size.**

---

## Printing Font Catalog

---

Print the names of fonts available on the printer.

### Note

- The paper selected under [**Page Setup**] is used.

### **1 Select [Print Fonts Catalogue] on the [File] menu.**

### **2 Click [Print].**

## Printing Font Sample

You can print samples of fonts downloaded to the hard disk drive or memory.

### Note

- Print by using the paper selected on [Page Setup].

- 1** Select [Print Fonts Sample...] on the [File] menu.
- 2** Click [Print].

## Renaming the Printer

You can change the printer's name displayed under Appletalk. If you connect several printers on the network, assign different names so you can identify them. If several printers have the same name, a digit appears next to the printer name in [Chooser].

- 1** Select [Rename Printer...] on the [File] menu.
- 2** Type a new name in the [New name:] field.

### Limitation

- You can enter up to 31 digits and letters.
- Do not use symbols, for example “\*”, “:”, “=”, “@”, “~”.

- 3** Click [Rename].  
The printer name is changed.
- 4** Press [OK].
- 5** Select [Chooser] on the Apple menu.
- 6** Click the [AdobePS] icon.
- 7** Click to select the printer name renamed in step **2**, and then close [Chooser].

### Note

- If there are several Appletalk zones, select the zone to which the printer belongs to.

## Restarting the Printer

---

You can restart the printer.

- 1** Select [Restart Printer] on the [File] menu.
- 2** Confirm the message that appears on the screen, and then click [Restart].

The printer restarts.

 **Note**

- The fonts that you downloaded in the printer's memory will be deleted.
- If the printer restarts, all the printer settings return to their defaults.

4

## Downloading PostScript Files

---

You can download a Postscript file to the printer.

- 1** Select [Download PostScript File...] on the [Utility] menu.
- 2** Select the file name to download and click the file name, and then click [Open].
- 3** Type the log file name, and then click [Save...].

The selected file is downloaded.

 **Note**

- Errors are recorded in the log file.

## Selecting the Zone

You can change the zone to which the printer belongs to via Appletalk.

### Important

- Confirm that the printer and a Mac OS are connected in an Appletalk environment.

#### 1 Select [Select Zone...] on the [Utility] menu.

The zone to which the printer belongs to and the available zone list appear.

#### 2 Select the zone to which you want to switch the printer, and then click [Change].

A confirmation message appears.

#### 3 Click [Continue].

A confirmation message appears.

#### 4 Press [OK].

#### 5 Select [Chooser] on the Apple menu.

#### 6 Click the [AdobePS] icon.

#### 7 Select the zone selected in step 2 on the [Appletalk zone:] list.

#### 8 Click to select the printer you want to use on the [Select a PostScript Printer:] list.

#### 9 Close [Chooser].

4

## Displaying the Printer Status

You can display and confirm the current status of the printer.

#### 1 Select [Display Printer Status...] on the [Utility] menu.

The current status of the printer appears.

#### 2 Confirm the current status of the printer.

You can confirm the memory capacity, the VM (Virtual Memory) space, the hard disk drive status and available space on the hard disk drive. You can also confirm the zone to which the printer belongs to.

#### 3 Click [OK].

## Launching the Dialogue Console

You can create and edit a PostScript file for printing, and then download it to the printer.

### Important

- “Launch Dialogue Console” is recommended for users with an understanding of PostScript.
- Do not download any file other than PostScript files to the printer.
- “Launch Dialogue Console” must be used at your own responsibility.

### **1 Select [Launch Dialogue Console...] on the [Utility] menu.**

Open the editing screen. The Dialogue Console menu bar appears.

4

### **2 Type the PostScript command in the editor screen.**

#### Note

- To edit a PostScript file, select [**Open**] on the [**File**] menu to open it.
- You can search or replace a character string by using the [**Search**] menu.

### **3 After editing the PostScript file, select [Download Top Window] on [Console] menu to start printing.**

The PostScript file is sent to the printer.

#### Note

- The [**Reply from Printer**] box opens, depending on the PostScript file you sent.

### **4 Select [Return To Main Menu] on the [Console] menu to close the PostScript file.**

# INDEX

## B

---

Black Over Print, 102

## C

---

Changing to EtherTalk, 63, 66  
CMYK Simulation Profile, 104  
Collate, 93  
Color Control, 105  
Color Mode, 99  
Color Profile, 101  
Color Setting, 100  
Creating a Desktop Printer Icon  
    *Mac OS*, 59

## D

---

Deleting a Locked Print File, 85  
Deleting a Sample Print File, 78  
Deleting Fonts, 111  
Destination Tray, 94  
Displaying Printer's Fonts, 111  
Displaying the Printer Status, 115  
Dithering, 103  
Document Server, 86  
Downloading PostScript Files, 114  
Downloading PS Fonts, 110  
Duplex Printing, 91

## F

---

Fit to Paper, 89  
Functions  
    *Printer Utility for Mac*, 109

## G

---

Gradation, 92  
Gray Reproduction, 102

## I

---

Image Smoothing, 104  
Initializing Printer Disk, 112  
Input Slot, 89  
Installing, 107  
    *Printer Utility for Mac*, 107  
Installing Adobe Type Manager  
    *Mac OS*, 60  
Installing Screen fonts  
    *Mac OS*, 61  
Installing the ColorSync Profiles  
    *Mac OS*, 60  
Installing the PostScript 3 Printer Driver  
    *and PPD File*  
        *Mac OS*, 57  
Installing the PPD Files  
    *Mac OS X*, 64  
Installing the Printer Driver Using USB  
    *Windows 2000*, 31

## J

---

Job Type, 70

## L

---

Launching the Dialogue Console, 116

## M

---

*Mac OS*, 57  
    *Mac OS X*, 64

## P

---

Page Setup, 112  
Paper Selection, 88  
Paper Size, 88  
Paper Type, 94  
Printer Utility for Mac, 107  
    *Functions*, 109  
Printing Font Catalog, 112  
Printing Font Sample, 113  
Printing with Bluetooth Connection  
    *Windows*, 44  
Printing with Parallel Connection  
    *Windows 2000*, 36  
Print Mode (Toner Saving), 90  
Punch, 95

## R

---

Renaming the Printer, 113  
Resolution, 90  
Restarting the Printer, 114

## S

---

Selecting the Zone, 115  
Separate into CMYK, 106  
Setting Up Options, 69  
    *Mac OS*, 59  
    *Mac OS X*, 65  
Setting Up PPD Files  
    *Mac OS*, 58  
Setting Up the PPD File  
    *Mac OS X*, 64  
Staple, 95

## U

---

User Code, 87  
Using Rendezvous  
    *Mac OS X*, 66  
Using USB Interface  
    *Mac OS*, 62  
    *Mac OS X*, 65

## W

---


Watermark, 96  
Watermark Angle, 98  
Watermark Font, 97  
Watermark Size, 97  
Watermark Style, 98  
Watermark Text, 96  
Windows 2000  
    *printer properties, PostScript 3*, 50  
Windows 95/98/Me  
    *printer properties, PostScript 3*, 49  
Windows NT 4.0  
    *document defaults, PostScript 3*, 54  
    *printer properties, PostScript 3*, 54  
Windows Server 2003  
    *printer properties, PostScript 3*, 52  
Windows XP  
    *printer properties, PostScript 3*, 52

## Z

---

Z-fold, 96





# PostScript 3 Supplement